

June  
2012

# PRODUCT CATALOG

## Institutional Grade Cabinet Locks



education | health care | gaming | airports | museums | prisons | banking | retail | laboratory | lockers

[www.olympus-lock.com](http://www.olympus-lock.com)  
800-525-0954 :: 206-362-3290

**OLYMPUS**  
**LOCK, INC.**  
*The cabinet lock innovators.*

# INTRODUCTION



## THE CABINET LOCK INNOVATORS

**ABOUT US:** Olympus Lock, Inc. is a leading manufacturer of easily rekeyable, pin tumbler cabinet locks and interchangeable core cabinet lock bodies for a wide range of commercial and institutional applications such as K-12 schools, universities, health care facilities, banks and more.

**OUR MISSION:** To create pin tumbler cabinet locks and accessories of unparalleled innovation, quality, keyway compatibility, and value in a manner which sets a new industry standard for excellence.

**EASY REKEYABILITY:** Our rekeyability features have created a new level of expectation for the cabinet lock industry. Rekeyability saves the end user time and money when servicing is required.

**KEYWAY COMPATIBILITY:** Olympus manufactures the broadest assortment of pin tumbler keyways offered by any commercial cabinet lock company including:

**SINGLE SOURCE:** Only Olympus offers the widest selection of pin tumbler cabinet locks and pin tumbler keyways of any cabinet lock manufacturer.

**INNOVATION:** We are a customer driven organization with an emphasis on creating innovative products that meet the ever-changing needs of our customers both today and into the future. Our numerous U.S. and Canadian patents prove our commitment to provide innovative solutions for your cabinet lock needs.

**RELIABILITY/QUALITY/SERVICE:** It has always been the intent of Olympus to provide cabinet locks that are easy to install, use, and service. Each product is carefully designed and engineered at our Lynnwood, Washington headquarters and is manufactured to exacting specifications for function, fit and finish.

**VALUE:** Olympus offers the best value in cabinet locks. In addition to our patented cabinet locks, we also offer a wide range of accessories to make the installation, use, and service of our products as easy as possible. Our key advantages matched with our modest pricing means you get the best product for the money.



# PRODUCT GROUPS

## SMALL PIN :: N Series



A value-priced alternative to commercial keyway or IC core locks, these locks conform to the National D4291 (4 pin) or D4292 (5 pin) key system. A variety of lock types are available including door and drawer deadbolt and latch locks, cam locks, sliding door plunger locks, ratchet locks and file cabinet locks. (See pages 8-14)

## SMALL PIN :: R Series



A value-priced alternative to commercial keyway or IC core locks, these locks conform to the CCL R1 (5 pin or 6 pin) key system. A variety of lock types are available including door and drawer deadbolt and latch locks, cam locks, sliding door plunger locks and ratchet locks. (See pages 15-19)

## PADLOCKABLE :: Cam Lock



This unique cam lock is generally used in locker applications where the end-user will be supplying their own padlock. We offer a variety of cam styles and lengths allowing this item to be adapted to a wide range of manufacturing styles. This item is now available with integrated cabinet pull. (See pages 20-21)

## STANDARD CYLINDER :: Schlage C Keyway



This product family offers locks utilizing the Schlage C keyway—one of Schlage's most popular keyways. Choose from door and drawer deadbolt and latch locks, cam lock or ratchet lock. All locks are easily rekeyable. (See pages 22-27)

## STANDARD CYLINDER :: Schlage Style, Less Cylinder



This product family includes the same locks as our Schlage C keyway but without cylinders. You can install a variety of popular third-party cylinders so your cabinet locks can utilize the same key system as the rest of the facility. (See pages 22-27)

## STANDARD CYLINDER :: Sargent, Less Cylinder



We offer door and drawer deadbolt lock bodies made specifically to chamber Sargent original cylinders. Key your cabinet locks into your existing Sargent system with ease. (See page 28)

## INTERCHANGEABLE CORE :: Schlage Full-Size



Olympus offers a range of cabinet lock options that will accept Schlage full-size interchangeable core including door and drawer deadbolt locks, cam lock, latch lock and ratchet lock. Also accepts Medeco Keymark and Mul-T-Lock large format interchangeable cores. (See pages 30-33)

## INTERCHANGEABLE CORE :: Sargent



Olympus is the only company that manufactures cabinet locks for Sargent interchangeable core. Add one-key convenience to your existing Sargent IC system by having your cabinets keyed into your Sargent IC key system. (See page 29)

## INTERCHANGEABLE CORE :: Corbin/Russwin



Olympus is the only company that manufactures cabinet locks for Corbin/Russwin interchangeable core. Add one-key convenience to your existing Corbin/Russwin system by having your cabinets keyed into your Corbin/Russwin key system. Locks are available door and drawer deadbolt, drawer latch and cam lock. (See pages 34-35)

## INTERCHANGEABLE CORE :: Medeco/Yale



Looking for a cabinet lock to accept a Medeco or Yale large format interchangeable core? We have them. Cabinet locks are available door or drawer with deadbolt function. (See page 36)

## INTERCHANGEABLE CORE :: Small Format



Olympus offers a wide selection of small format (BEST style) interchangeable core locks including direct retrofits for Best original cabinet locks. Available styles include door and drawer deadbolt and latch locks, cam locks, sliding door plunger locks, through-glass locks, ratchet locks and mailbox locks. (See pages 38-48)

## UTILITY CAM LOCK :: Best Keyway



This is a non-IC core cam lock available with a Best A, E, F, G, J, K, L or R keyway. It fits in a standard 3/4" hole and utilizes our patented cam shifting mechanism for maximum flexibility. (See page 37)



# TABLE OF CONTENTS

## SMALL PIN LOCKS

N SERIES	Page
100DR / 200DW.....	8
300SD.....	10
329R.....	10
998, 999.....	11
DCN1,2,3,4.....	9
FC10/FC26-AR.....	13
N078.....	14
T37.....	12
T54C.....	13
R SERIES	Page
500DR / 600DW.....	15
400SD.....	17
429R.....	17
996, 997.....	18
DCR1,2,3,4.....	16
R078.....	19

## PADLOCKABLE CAM LOCK

CAM LOCK/HASP	Page
DCP.....	20
DCP500.....	21

## STANDARD CYLINDER LOCKS

SCHLAGE "C" KEYWAY	Page
700S / 800S.....	22
820S.....	25
829R.....	26
850S.....	27
L78.....	24
SCHLAGE STYLE, LESS CYLINDER	Page
700LC / 800LC.....	23
820LC.....	25
829R-LC.....	26
850LC.....	27
L78LC.....	24
KABA Conversion Kit.....	23
SARGENT STYLE, LESS CYLINDER	Page
754LC.....	28
854LC.....	28

## BEST KEYWAY

UTILITY CAM LOCK	Page
B7.....	37

## INTERCHANGEABLE CORE

SARGENT	Page
SA54.....	29
SCHLAGE FULL-SIZE	Page
777IC / 888IC.....	30
920.....	31
929R.....	32
L92.....	33
CORBIN/RUSSWIN	Page
CR1125RD.....	34
CR1125RL.....	34
CR25.....	35

MEDECO/YALE	Page
931DR.....	36
931DW.....	36

SMALL FORMAT, BEST STYLE	Page
206/207 SFIC Cores.....	38
720.....	39
721.....	40
722.....	41
723.....	41
724VR.....	42
725RD.....	44
725RL.....	43
725RSL.....	42
725MD.....	45
725ML.....	46
728MBL.....	47
729R.....	47
950.....	48

## PADLOCKS

BRASS/REKEYABLE/IC CORE	Page
Dimensions & Weight.....	68
Mountain Series.....	69
Olympus Series.....	70
RB175 (Schlage/Weiser Keyway).....	71
CRB200 (Corbin/Russwin IC core).....	71

## OTHER PRODUCTS

OTHER ITEMS	Page
CL-HIT-25 Drill Guide.....	52
Display Boards.....	52
Keyblanks & Cut Keys.....	54
Olympus 2000 Handles.....	50-51
Pin Kits & Pin Accessories.....	49
SK-002 Sample & Service Kit.....	48

PARTS & ACCESSORIES	Page
DCN/DCR/B7 Cam Lock Accessories.....	53
Internal Spacers.....	55
Strikes.....	59-61
SW-1 Switch Accessory Pack.....	62
Through-Bolt Plates & Pulls.....	56-58
Trim Rings.....	54
1-1/8" Dia. Cam Lock Accessories.....	62-63

## REFERENCE, TERMS & CONDITIONS

REFERENCE	Page
Architectural Specifications.....	65-67
Finish Chart.....	6
Handing/Key-Retaining Chart.....	6
Product Groups.....	3
Rekeying Instructions.....	64
Replacement Guide.....	7
Website Resources.....	6
1-1/8" Dia. Cam Lock Install Notes.....	62

TERMS & CONDITIONS	PAGE
Cancellation Policy.....	5
Freight Policy.....	5
Minimum Order Amount.....	5
Returned Goods Policy.....	5
Terms & Conditions.....	5
Warranty.....	5

# TERMS & CONDITIONS OF SALE

## CONDITIONS OF SALE

**Payment Terms:** 2% 10 days, net 30 days. All payment terms are subject to credit approval.

**Remittance Address:** All payments should be sent by mail to: Olympus Lock, Inc., PO Box 1277, Lynnwood, WA 98046

**Minimum Order:** \$25.00 net excluding freight.

**Minimum Annual Purchases:** \$10,000.00 net excluding freight for open account status.

**Prices:** Olympus Lock, Inc. reserves the right to change pricing at any time and without prior notice.

**Conditions:** All specifications are subject to withdrawal or change at any time and without prior notice. Olympus Lock reserves the right to refuse orders which may be submitted. All prices F.O.B. Lynnwood, Washington, US Funds.

## OFFICE HOURS & CONTACT INFORMATION

**Office Hours:** 7:00 am to 4:00 pm Pacific Standard Time

**Phone:** 206-362-3290, Toll-Free: 800-525-0954, Fax: 206-362-3569

**Street Address:** 18424 Highway 99, Lynnwood, WA 98037

**Website:** [www.olympus-lock.com](http://www.olympus-lock.com)

**Company email:** [info@olympus-lock.com](mailto:info@olympus-lock.com)

## U.S. SHIPMENTS

All merchandise is shipped F.O.B. from our Lynnwood, Washington warehouse and becomes the property of the customer when accepted by the carrier. Olympus Lock will pay freight charges on orders of \$1,000.00 net or more to a single destination within the continental U.S.A. (excluding Alaska) via the carrier of our choice. For Hawaii and Alaska Customers: Olympus will pay freight on shipments of \$1,000.00 net or more to closest U.S. West Coast port.

## CANADIAN SHIPMENTS

All merchandise is shipped F.O.B. our Lynnwood, Washington warehouse and becomes the property of the customer when accepted by the carrier. Olympus Lock will pay freight charges on Canadian orders of \$1,000.00 net or more to closest U.S.A. border crossing via the carrier of our choice provided this information is clearly specified at time of order. Olympus Lock will pay freight charges on Canadian orders of \$2,000.00 net or more to a single Canadian destination via the carrier of our choice. All duty and/or customs charges are the sole responsibility of the customer.

## DELIVERY

Claims resulting from loss, shortages or damage-in-transit must be reported to Olympus Lock within 15 days of delivery.

Any claims resulting from shortages, overages, or the shipment of incorrect products by Olympus Lock must be reported to Olympus Lock within 15 days of delivery.

Olympus Lock does not assume responsibility for any damages resulting from any delays in delivery.

## CANCELLATIONS

Cancellations or alterations to orders will be accepted only when the cancellation or alteration can be made without loss to Olympus Lock. Orders for non-stock and/or custom items may not be cancelled after work has begun.

## RETURNED GOODS POLICY

No material is to be returned without our verbal or written permission in advance. All returned goods require a Returned Goods Authorization (RGA) number to be obtained from Olympus Lock prior to returning the goods. Only products purchased within the last 12 months may be returned. Any products purchased more than 12 months prior are ineligible for return. Whether goods may be returned will be at the sole discretion of Olympus Lock, Inc. Merchandise returned must be identified as to original purchase order number, date of purchase, and shipper's name and address.

A 25% restocking fee will apply to all returned goods which are found not to be the responsibility of Olympus Lock.

All goods must be shipped freight prepaid and received at our warehouse within 30 days of receiving an RGA number. Goods not received within 30 days of RGA issuance or for which an RGA number was not issued will not be returned and no credit will be issued.

Returned goods must be received in first-class resaleable condition and in original factory packaging. The determination of "first-class resaleable condition" will be at the sole discretion of Olympus Lock. Goods that are returned and determined by Olympus Lock not to be in first-class resaleable condition will not be returned, will be scrapped at the factory, and no credit will be issued.

### The following are non-returnable:

1. Custom keyed, non-stock items
2. Goods that have been installed
3. Goods that required custom stamping
4. Goods with custom, special order finishes
5. Products or parts that have been modified
6. Obsolete or discontinued items

## LIMITED WARRANTY

Olympus Lock warrants that its products are free from defects in workmanship and materials under normal installation, use and service. This warranty does not cover defects or damages arising from improper installation, improper maintenance, ordinary wear and tear, misuse or abuse.

The only liability of the company in tort or in contract, whether under this warranty or otherwise shall be limited to repair or replacement of products which are returned prepaid to us within one year of the date of original purchase.

This is a limited warranty and is in lieu of all other representations and expressed or implied warranties. Under no circumstances shall Olympus Lock be made liable for any incidental or consequential damages or losses.

## WEBSITE RESOURCES

**SUBSCRIBE TODAY!** Go to our website and sign up now to receive new product announcements, technical bulletins and our quarterly Olympus eNewsletter.

**ADDITIONAL RESOURCES ARE AVAILABLE ON OUR WEBSITE AT [WWW.OLYMPUS-LOCK.COM](http://WWW.OLYMPUS-LOCK.COM)**

- > Complete product information
- > Installation instructions
- > Reversing handing instructions
- > Rekeying instructions
- > Key retaining instructions
- > Architectural specifications
- > Catalogs and product data sheets online
- > Advertisements online
- > Contact information
- > Project samples
- > US and Canadian distributor lists
- > Digital photo downloads
- > Current and previous newsletters
- > Replacement guide
- > Warranty information
- > Parts & accessories

[www.olympus-lock.com](http://www.olympus-lock.com)



## FINISH CHART

### STANDARD FINISHES:

Not all finishes available on all products. See catalog page.

US Code	BHMA	Description
US26	625	Bright chrome
US26D	626	Dull chrome
US3	605	Bright brass
US4	606	Satin brass
US32D	630	Satin stainless steel

### SPECIAL ORDER FINISHES:


Call Olympus Lock for price and availability.

US Code	BHMA	Description
US10B	613	Oil rubbed bronze
US19	622	Flat black coated

Other finishes may be available. Call Olympus for price and availability.

## HANDING & KEY-RETAINING CHART

### HANDING/KEY-RETAINING CHART

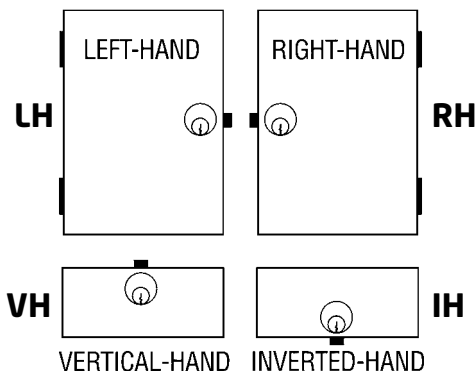

**Left-hand lock (LH)** = Cabinet door hinged on left  
**Right-hand lock (RH)** = Cabinet door hinged on right  
**Vertical-hand lock (VH)** = Drawer lock, bolt locks up  
**Inverted-hand lock (IH)** = Drawer lock, bolt locks down

**Key-retaining definition:** The key cannot be removed from the lock while in the "unlocked" position. The key can only be removed from the lock if the lock is in the "locked" position.

**Use of key-retaining function:** Key-retaining function is generally used in instances where cabinets or drawers should not be left unlocked.

**Handed locks:** Handed locks must be ordered either LH, RH, VH or IH.

**Non-Handed locks:** Non-handed locks can be ordered as either door or drawer. Door locks will work in both LH or RH applications and drawer locks will work for both vertical or inverted function.

## REPLACEMENT GUIDE

Information given is for dimensional and keyway replacement only. Olympus Lock cabinet locks differ from other manufacturer's locks because they are easily rekeyable in five minutes or less with readily available tools.

Corbin / CCL Security Products		
15748	Cam Lock	5/8"
15749		13/16"
15750		1"
15783		1"
15890	Cam Lock	1-5/16"
0666 1/2	Drawer Latch	7/8"
0666 1/2	Drawer Latch	1-1/8"
Not Available		
Not Available		
0737	Door Lock	3/4" 7/8"
0737	Door Lock	1-1/8" 1-3/8"
0738	Drawer Lock	3/4" 7/8"
0738	Drawer Lock	1-1/8" 1-3/8"
02063	Drawer Lock	7/8"
02291	Sliding Door	7/8"
Not Available		

Olympus Lock - R Series		
<b>DCR1</b>	Cam Lock	1-1/16"
<b>DCR3</b>	Cam Lock	1-7/16"
<b>996</b>	Drawer Latch	7/8"
<b>996</b>	Drawer Latch	1-3/8"
<b>997</b>	Door Latch	7/8"
<b>997</b>	Door Latch	1-3/8"
<b>500DR</b>	Door Lock	7/8"
<b>500DR</b>	Door Lock	1-3/8"
<b>600DW</b>	Drawer Lock	7/8"
<b>600DW</b>	Drawer Lock	1-3/8"
<b>R078</b>	Drawer Lock	1-1/8"
<b>400SD</b>	Sliding Door	1"
<b>429R</b>	Ratchet Lock	1/4"

CompX / National Cabinet Lock		
C8102	Cam Lock	1-1/16"
C8103	Cam Lock	1-3/16"
C8106	Cam Lock	1-7/16"
C8108 C8109	Cam Lock	1-3/4"
C8173	Door Lock	7/8"
C8174 C8175	Door Lock	1-1/8" 1-3/8"
C8178	Drawer Lock	7/8"
C8177 C8179	Drawer Lock	1-1/8" 1-3/8"
Not Available		
C8142	Sliding Door	1-1/8"
C8163	Drawer Lock	7/8"
Not Available		
Not Available		
Not Available		
C8131	Drawer Latch	7/8"
Not Available		
C8139	Door Latch	3/4"
Not Available		
Not Available		
C8137	T-Bolt Drawer	1/4"
C8140	Ratchet Lock	1/4"

Olympus Lock - N Series		
<b>DCN1</b>	Cam Lock	1-1/16"
<b>DCN2</b>	Cam Lock	1-3/16"
<b>DCN3</b>	Cam Lock	1-7/16"
<b>DCN4</b>	Cam Lock	1-3/4"
<b>100DR</b>	Door Lock	7/8"
<b>100DR</b>	Door Lock	1-3/8"
<b>200DW</b>	Drawer Lock	7/8"
<b>200DW</b>	Drawer Lock	1-3/8"
<b>200DW</b>	Drawer Lock	1-5/8"
<b>300SD</b>	Sliding Door	1-1/8"
<b>N078</b>	Drawer	1-1/8"
<b>N078</b>	Drawer	1-3/8"
<b>N078L/R</b>	Door	1-1/8"
<b>N078L/R</b>	Door	1-3/8"
<b>998</b>	Drawer Latch	7/8"
<b>998</b>	Drawer Latch	1-3/8"
<b>999</b>	Door Latch	7/8"
<b>999</b>	Door Latch	1-3/8"
<b>FC10</b>	File Cabinet	n/a
<b>T37</b>	T-Bolt Drawer	1/4"
<b>329R</b>	Ratchet Lock	1/4"

IR / Schlage Lock		
CL1000LBC	Door Lock	1-1/8"
CL1000LBD	Door Lock	1-3/8"
CL2000LBC	Drawer Lock	1-1/8"
CL2000LBD	Drawer Lock	1-3/8"

Olympus Lock*		
<b>700SC</b>	Door Lock	1-1/8"
<b>700SC</b>	Door Lock	1-3/8"
<b>800SC</b>	Drawer Lock	1-1/8"
<b>800SC</b>	Drawer Lock	1-3/8"

\*Olympus Lock offers Schlage C keyway only.

File Cabinet Locks	
HON F24/ F28	HON Original (disc tumbler)
SRS2185	SRS Replacement Lock (disc tumbler)
HON F26	Hon Original (disc tumbler)
SRS2190	SRS Replacement Lock (disc tumbler)

Olympus Lock*	
<b>FC10</b>	File Cabinet Lock
<b>FC10</b>	File Cabinet Lock
<b>FC10 + FC26-AR</b>	File Cabinet Lock + Adapter Ring
<b>FC10 + FC26-AR</b>	File Cabinet Lock + Adapter Ring

\*Olympus equivalent locks are on National D4291/D4292 pin tumbler keyway.

Sargent	
1654	Door Lock
1655	Door Lock
Not Available	

Olympus Lock*	
<b>754LC</b>	Door Lock - less cylinder
<b>754LC</b>	Door Lock - less cylinder
<b>854LC</b>	Drawer Lock - less cylinder

\*Locks are less cylinder for use with Sargent original cylinders.

Best Access	Olympus Lock	
3L	<b>721 Series</b>	Door/Drawer Lock
5E	<b>B7 Series</b>	Non-IC cam lock
5L7RD	<b>725RD Series</b>	Door/Drawer Lock
5L7RL	<b>725RL Series</b>	Door/Drawer Lock
5L7MD	<b>725MD Series</b>	Door/Drawer Lock
5L7ML	<b>725ML Series</b>	Door/Drawer Lock
8L	<b>728MBL</b>	Mailbox Lock
1E7D4, 1E7E4	<b>720</b>	Door/Drawer
2P73	<b>724VR</b>	File Cabinet Lock
2S	<b>722</b>	Plunger Lock
2S-TBM	<b>722-TBM</b>	Sliding Door
3S	<b>729R</b>	Ratchet Lock
4S	<b>723S</b>	Through-glass
Not Available	<b>950IC</b>	Drawer Lock

## 100/200 :: Deadbolt Lock

### GENERAL FEATURES:

**Keying:** Can be keyed together with other N Series locks

**Rekeyable:** Easily rekeyable via set screw cylinder release mechanism

**ANSI/BHMA:** Tested to ANSI/BHMA A156.11 Grade 1 cycle testing. Withstood in excess of 40,000 cycles with no damage. All other requirements of ANSI/BHMA A156.11, no less than Grade 2 performance was attained.

**US Patent Nos:** 4,899,563; 4,920,774

**Body:** Zinc die cast lock body

**Cylinder:** Solid brass pin tumbler cylinder

**Barrel diameter:** 7/8"

**100DR includes:** 56-1 bar strike

**200DW includes:** 12-3 angle strike

**Finish:** 26D, US4 or 10B

**Packaged:** Packed 10 per box

### KEYING INFORMATION:

**Keyway:** National D4291 (4 pin) or D4292 (5 pin) keyway

**Stock keying:** KD/KA - 4 pin standard

**Stock KA#:** 101, 103, 107, 915

**Masterkeying:** 5 pin standard

**Keyblank 4-pin:** KBN-4-NP

(equivalent to NA14, 1069L)

**Keyblank 5-pin:** KBN-5-NP

(equivalent to NA12, 1069LA)



**100DR**  
DOOR



**200DW**  
DRAWER




Item	Function	Finish	Cyl. Length	Type	Keying
100DR	Door	26D, US4, 10B	15/16"	Deadbolt	KD, KA# 101,103,107,915 Custom Keyed
100DR	Door	26D, US4	1-3/8"	Deadbolt	
Key-Retaining: Specify item 100KL for left-hand doors and 100KR for right-hand doors.					

Item	Function	Finish	Cyl. Length	Type	Keying
200DW	Drawer	26D, US4, 10B	15/16"	Deadbolt	KD, KA# 101,103,107,915 Custom Keyed
200DW	Drawer	26D, US4, 10B	1-3/8"	Deadbolt	
200DW	Drawer	26D	1-5/8"	Deadbolt	
Key-Retaining: Specify item 200KI for inverted drawers and 200KV for vertical drawers.					

**ACCESSORIES:** For a complete list, see the accessories section of this catalog.

- > WP21 spacer (3/32" thickness)
- > WP22 spacer (1/4" thickness)
- > WP23 spacer (1/2" thickness)
- > 07S, 12-1, 12-2, 12-4, 56-1 strikes
- > TR1256 trim rings
- > Through-bolt plate ETS2, trim pull ETS2-PL and template ETST2 for through-bolt mount

### KEY-RETAINING CHART

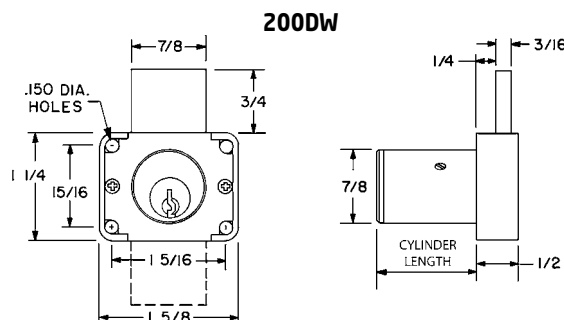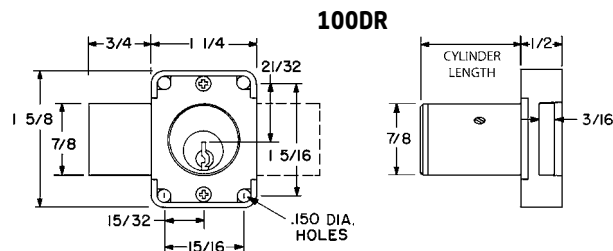



## DCN :: Cam Locks

### GENERAL FEATURES:

**Keying:** Can be keyed together with other N Series locks

**Rekeyable:** Easily rekeyable via cylinder retainer clip

**ANSI/BHMA:** Grade 1

**US Patent Nos:** 5,038,589; 5,737,950

**Body:** Zinc die cast lock body

**Cylinder:** Zinc die cast pin tumbler cylinder

**Functions:** Non-key retaining (standard).

Alternate key-retaining shifters are available separately.

**Cams:** 2 reversible cams work in all positions

**Face:** 1" face covers splintering, no additional trim ring required

**Finish:** 26D, US3 or 10B

**Packaged:** Packed 10 per box

### KEYING INFORMATION:

**Keyway:** National D4291 (4 pin) or D4292 (5 pin) keyway

**Stock keying:** KD/KA - 4 pin standard

**Stock KA#:** 101, 103, 107, 915

**Masterkeying:** 5 pin standard

**Keyblank 4-pin:** KBN-4-NP (equivalent to NA14, 1069L)

**Keyblank 5-pin:** KBN-5-NP (equivalent to NA12, 1069LA)

### INCLUDES:


See chart below.

**ACCESSORIES:** See page 53 for a complete list of:

- > Optional cams and accessories for 3/4" cam locks




### MOUNTING CUTOUT



Item	Finish	Cyl. Length*	Type	Keying
DCN1	26D, US3, 10B	1-1/16"	Cam Lock	KD, KA 101,103,107,915 Custom Keyed
DCN2	26D, US3, 10B	1-3/16"	Cam Lock	
DCN3	26D, US3, 10B	1-7/16"	Cam Lock	
DCN4	26D, US3, 10B	1-3/4"	Cam Lock	

\*Cyl. Length: As measured with straight cam.

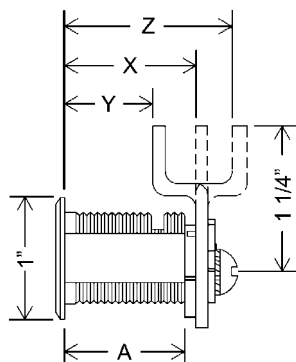

### DIMENSIONS

	For Mat. Thickness	Straight Cam (X)	Inbent Cam (Y)	Outbent Cam (Z)	Cylinder Length (A)
DCN1	3/4"	1-1/16"	3/4"	1-3/8"	1"
DCN2	7/8"	1-3/16"	7/8"	1-1/2"	1-1/8"
DCN3	1-1/8"	1-7/16"	1-1/8"	1-3/4"	1-3/8"
DCN4	1-1/2"	1-13/16"	1-1/2"	2-1/8"	1-3/4"

### DCN LOCKS SHIP STANDARD WITH THE FOLLOWING PARTS:

<b>DCNP-200-0CD</b> lost motion, non-key retaining cam shifter	<b>DCNP-500-ARP</b> anti-rotation plate	<b>DCNP-100-SC</b> straight cam	<b>DCNP-100-BC</b> offset reversible cam

### BELOW KEY-RETAINING SHIFTERS SOLD SEPARATELY

<b>DCNP-200-KR</b> key-retaining drawer cam shifter
<b>DCNP-200-KDR</b> key-retaining door cam shifter

## 300SD :: Plunger Lock

### GENERAL FEATURES:

**Keying:** Can be keyed together with other N Series locks

**Rekeyable:** Easily rekeyable via speed-release cylinder release mechanism

**US Patent Nos:** 4,920,774; 5,121,619

**Body:** Zinc die cast lock body

**Cylinder:** Solid brass pin tumbler cylinder

**Barrel length:** 1"

**Barrel diameter:** 1"

**Finish:** 26D, US3 or 10B

**Packaged:** Packed 10 per box

### KEYING INFORMATION:

**Keyway:** National D4291 (4 pin) or D4292 (5 pin) keyway

**Stock keying:** KD/KA - 4 pin standard

**Stock KA#:** 101, 103, 107, 915

**Masterkeying:** 5 pin standard

**Keyblank 4-pin:** KBN-4-NP

(equivalent to NA14, 1069L)

**Keyblank 5-pin:** KBN-5-NP

(equivalent to NA12, 1069LA)


### INCLUDES:

10-24 machine thread bolt extender for

varying gaps between bypassing doors

10-24 machine thread strike locator

Matching thimble strike

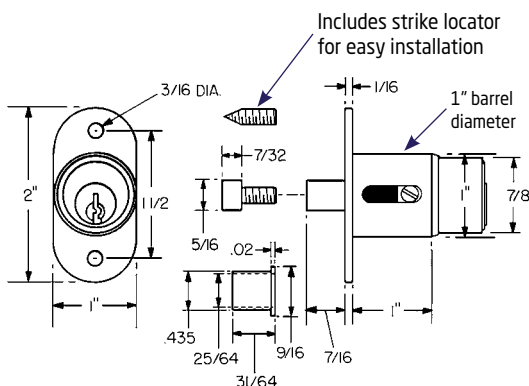

Item	Finish	Cyl. Length	Type	Keying
300SD	26D, US3, 10B	1"	Plunger Lock	KD, KA 101,103,107,915 Custom Keyed

## 329R :: Showcase/Ratchet Lock

### GENERAL FEATURES:

**Keying:** Can be keyed together with other N Series locks

**Rekeyable:** Easily rekeyable via speed-release cylinder release mechanism

**US Patent No:** 5,121,619

**Body:** Zinc die cast lock body

**Cylinder:** Solid brass pin tumbler cylinder

**Strap:** Strap fits 1/4" material

**Finish:** 26D

**Packaged:** Packed 10 per box

### KEYING INFORMATION:

**Keyway:** National D4291 (4 pin) or D4292 (5 pin) keyway

**Stock keying:** KD/KA - 4 pin standard

**Stock KA#:** 101, 103, 107, 915

**Masterkeying:** 5 pin standard

**Keyblank 4-pin:** KBN-4-NP


(equivalent to NA14, 1069L)

**Keyblank 5-pin:** KBN-5-NP


(equivalent to NA12, 1069LA)



Item	Finish	Type	Keying
329R	26D	Ratchet Lock	KD, KA 101,103,107,915 Custom Keyed

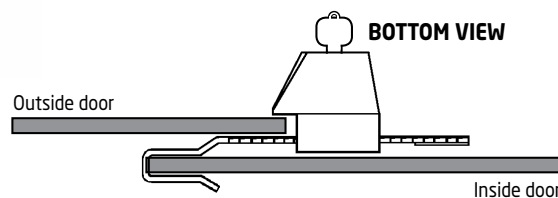

### STRAP DIMENSIONS

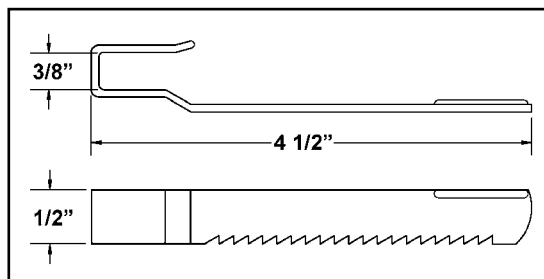

## 998/999 :: Latch Lock

### GENERAL FEATURES:

**Keying:** Can be keyed together with other N Series locks

**Reversible:** Easily reversible between door and drawer function

**Rekeyable:** Easily rekeyable via set screw cylinder release mechanism

**US Patent Nos:** 4,899,563; 7,874,189 B2

**Body:** Zinc die cast lock body

**Cylinder:** Solid brass pin tumbler cylinder

**Barrel diameter:** 7/8"

**Includes:** Matching latch strike

**Finish:** 26D or US4

**Packaged:** Packed 10 per box

### KEYING INFORMATION:

**Keyway:** National D4291 (4 pin) or D4292 (5 pin) keyway

**Stock keying:** KD/KA - 4 pin standard

**Stock KA#:** 101, 103, 107, 915

**Masterkeying:** 5 pin standard


**Keyblank 4-pin:** KBN-4-NP (equivalent to NA14, 1069L)

**Keyblank 5-pin:** KBN-5-NP (equivalent to NA12, 1069LA)

**ACCESSORIES:** For a complete list, see the accessories section of this catalog.

- > WP24 spacer (1/8" thickness)
- > TR1256 trim rings
- > Reinforcing trim spacers
- ETS6 and template ETST6 for through-bolt mount

### HANDING CHART



998V



998I



999L




999R


**Field reversible into all four handings!**

Item	Function	Finish	Cyl. Length	Type	Keying
999R	RH Door	26D, US4	15/16" or 1-3/8"	Latch	KD, KA 101, 103, 107, 915 Custom Keyed
999L	LH Door	26D, US4	15/16" or 1-3/8"	Latch	
998V	VH Drawer	26D, US4	15/16" or 1-3/8"	Latch	
998I	IH Drawer	26D, US4	15/16" or 1-3/8"	Latch	
Field Reversible: Locks are easily reconfigured in the field into any of the other three handings.					


### 999L LEFT HAND

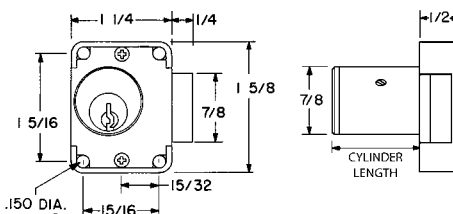


### 999R RIGHT HAND

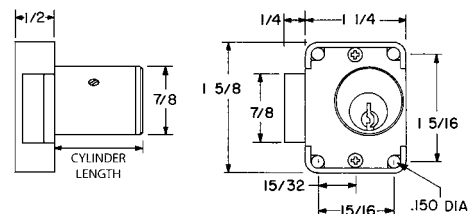

### 998V VERTICAL HAND

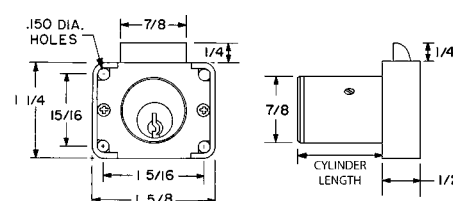

### 998I INVERTED HAND

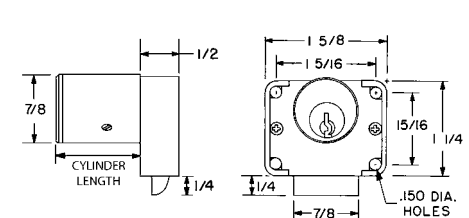

## T37 :: T-Bolt Drawer Lock

### GENERAL FEATURES:

**Keying:** Can be keyed together with other N Series locks

**Rekeyable:** Working top-slide, cylinder retainer staple and removable bezel ring make rekeying fast and easy. No more need to pry off faceplates and pin retainer clips.

**US Patent No:** 5,038,589

**Retrofits:** National C8137

**Material:** Zinc die cast lock body

**Bolt:** Stainless steel

**Includes:** Brass mounting nut

**Barrel diameter:** 3/4"

**Across flats:** 5/8"

**Finish:** 26D

**Packaged:** Packed 10 per box

### KEYING INFORMATION:

**Keyway:** National D4291 (4-pin) keyway

**Stock keying:** KD/KA - 4 pin standard

**Stock KA#:** 101, 103, 107, 915 and groups 001 through 030

**Masterkeying:** 4 pin standard

**Keyblank 4-pin:** KBN-4-NP


(equivalent to NA14, 1069L)

### SPECIAL NOTE ON BOLTS ONLY:


The T37-1 (regular bolt) and T37-2 (long bolt) will not work in the National C8137 lock. However, the C8137 bolts will work in the T37 lock.

### ACCESSORIES:


See chart below.

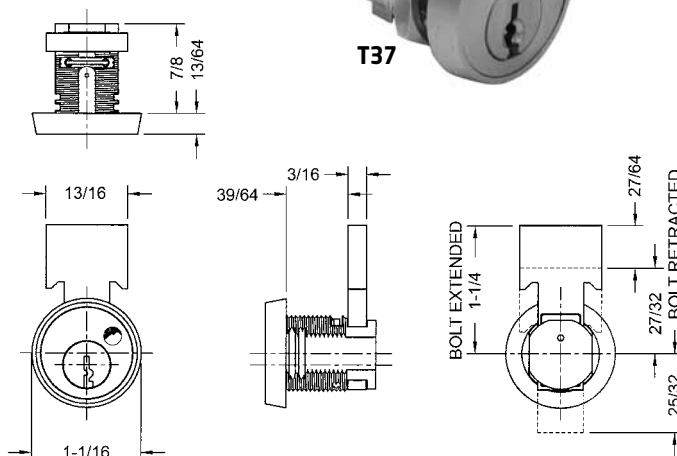

### DRAWER DETAIL



### MOUNTING HOLE DETAIL



Item	Finish	Cyl. Length	For Material	Type	Keying
T37	26D	19/32"	1/4"	T-bolt	KA* or KD Custom, master keyed
T37-2	Long bolt				
T37-3	Short bolt (Chicago-style) for 25/32" backset				
T37-RC	Spring mounting clip				
T37-NKIT	Number plate kit				
T37DC-NP	Replacement number plate only				
*KA Nos: 101,103,107,915 and 001 through 030. Other codes available via custom keying.					

### OPTIONAL ACCESSORIES

<p>The lock comes standard with clip mounting locations up to 11/64" material thicknesses.</p>	<p>Replacement number plates also available separately (Use part no. T37DC-NP).</p>		
<b>T37-RC</b> Spring mounting clip	<b>T37-NKIT</b> Number plate kit eliminates need to stamp face of lock	<b>T37-2</b> Long bolt can be cut to length required by application	<b>T37-3</b> Short bolt for 25/32" backset



## T54C :: T-Knob Cylinder Replacement Kit

The new T54C T-Knob Cylinder Replacement Kit replaces original CompX/National T-knob pin tumbler cylinders. You no longer need to replace the entire t-knob lock, just replace the non-functional cylinder. Our cylinder is all brass construction for increased durability. This is a 5-pin cylinder and can be keyed to match your existing 4-pin or 5-pin systems. The T54C replacement cylinder will work with all CompX/National pin-tumbler t-knob locks regardless of handing or key operation (key removable in locked or unlocked position) or latch configuration. *Can be keyed to match our T37 for metal drawers (see opposite page) or any of our other N Series products.*


### GENERAL FEATURES:

**Keying:** Can be keyed together with other N Series locks  
**Rekeyable:** Includes working top-slide for easy rekeying  
**Replaces:** CompX/National original cylinder for C8154 or C8155 pin tumbler t-knob locks used on metal cabinet doors  
**Cylinder:** Drilled for 5 pins. Can be keyed to match existing 4-pin or 5-pin systems  
**Material:** Solid brass  
**Finish:** 26D  
**Packaged:** Packed 25 per box

### KEYING INFORMATION:

**Keyway:** National D4291 (4-pin) or D4292 (5-pin) keyway  
**Keying:** Can be keyed to match National 4 or 5 pin key systems  
**Stocked:** As replacement kit. Includes plug + housing, no pins or springs and 2 KBN-4-NP keyblanks.  
**Custom keying:** Available  
**Keyblank 4-pin:** KBN-4-NP (equivalent to NA14, 1069L)  
**Keyblank 5-pin:** KBN-5-NP (equivalent to NA12, 1069LA)

T54C

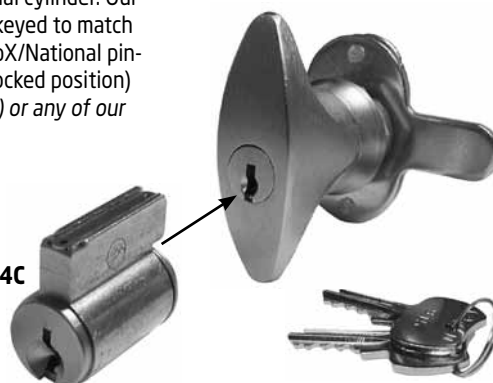

Item	Finish	Type	Keying
T54C	26D	Replacement cylinder	Ship standard with empty chambers and 2 ringed 4-pin keyblanks KD, KA, custom or master keyed available

## FC10 :: File Cabinet Lock Kit

**HON**

### GENERAL FEATURES:

**Keying:** Can be keyed together with other N Series locks  
**Rekeyable:** Working top-slide, cylinder retainer staple and removable bezel ring make rekeying fast and easy  
**Retrofit:** Replacement for HON F24/F28 style vertical file cabinet locks  
**U.S. Patent Nos:** 5,038,589; 5,737,950  
**Material:** Zinc die cast lock body  
**Includes:** Brass mounting nut  
**Barrel diameter:** 3/4"  
**Across flats:** 5/8"  
**Finish:** 26D  
**Packaged:** Packed 10 per box

### KEYING INFORMATION:

**Keyway:** National D4291 (4 pin) or D4292 (5 pin) keyway  
**Stock keying:** KD/KA - 4 pin standard  
**Stock KA#:** 101, 103, 107, 915  
**Masterkeying:** 5 pin standard  
**Keyblank 4-pin:** KBN-4-NP (equivalent to NA14, 1069L)  
**Keyblank 5-pin:** KBN-5-NP (equivalent to NA12, 1069LA)

### ACCESSORIES:

- > T37-NKIT: Number plate kit, eliminates need to stamp face of lock.
- > T37DC-NP: Replacement number ring plates available (see opposite page).



FC10

Item	Finish	Type	Keying
FC10	26D	File cabinet lock	KD, KA 101,103,107,915 Custom, master keyed
T37-NKIT T37DC-NP		Number plate kit Replacement number plate only	

## FC26-AR :: Adapter Ring

### GENERAL FEATURES:

**Use:** Replaces standard trim collar shipped with the Olympus FC10.  
**Retrofit:** Replacement for HON F26 style vertical file cabinet locks.  
**Conversion:** Converts the Olympus FC10 file cabinet lock so it can be used as a replacement for a HON F26 style vertical file cabinet lock.

**Usage:** Use the FC26-AR adapter ring in place of the bezel ring that comes standard with the FC10. Installation: Install trim collar with arrow on back facing top of cabinet.



FC26-AR

### ADAPTER RING FOR HON F26 STYLE VERTICAL FILE CABINET LOCKS.

Item	Finish	Type	Description
FC26-AR	26D	Adapter ring	Adapter ring converts FC10 to work as a replacement for HON F26 style lock.

## N078 :: Deadbolt Lock

### GENERAL FEATURES:

**Keying:** Can be keyed together with other N Series locks

**Rekeyable:** Easily rekeyable via set screw cylinder release mechanism

**US Patent Nos:** 4,899,563; 4,920,774

**Handing:** N078 (drawer vertical), N078R\* (right-hand), N078L\* (left-hand)

**Body:** Zinc die cast lock body

**Cylinder:** Solid brass pin tumbler cylinder

**Barrel lengths:** 1-1/8" or 1-3/8"

**Barrel diameter:** 7/8"

**Finish:** 26D or US4

**Packaged:** Packed 10 per box

### KEYING INFORMATION:

**Keyway:** National D4291 (4 pin) or D4292 (5 pin) keyway

**Stock keying:** KD/KA - 4 pin standard

**Stock KA#:** 101, 103, 107, 915

**Masterkeying:** 5 pin standard

**Keyblank 4-pin:** KBN-4-NP

(equivalent to NA14, 1069L)

**Keyblank 5-pin:** KBN-5-NP

(equivalent to NA12, 1069LA)



**N078**  
DRAWER



**N078R**  
RH DOOR




**N078L**  
LH DOOR

Item	Function	Finish	Cyl. Length	Type	Keying
N078	VH Drawer	26D, US4	1-1/8" or 1-3/8"	Deadbolt	KD, KA 101,103,107,915 Custom Keyed
N078R*	RH Door	26D, US4	1-1/8" or 1-3/8"	Deadbolt	
N078L*	LH Door	26D, US4	1-1/8" or 1-3/8"	Deadbolt	


**\*Note:** N078R and N078L door locks are field reversible between left and right handings.

**ACCESSORIES:** For a complete list, see the accessories section of this catalog.


- > WP21 spacer (3/32" thickness)
- > WP22 spacer (1/4" thickness)
- > WP23 spacer (1/2" thickness)
- > 07S, 56-1, 12-1, 12-2, 12-4 strikes
- > TR1256 trim ring
- > 078-LB1-DW optional 1/2" outbent drawer bolt
- > 078-LB-DR optional 1/4" longer bolt for doors
- > Reinforcing trim spacer ETS3 and template ETST3 for through-bolt mount



Dimensions are the same for door locks




### HANDING CHART



### AVAILABLE SEPARATELY

#### 078-LB1-DW - 1/2" outbent drawer bolt

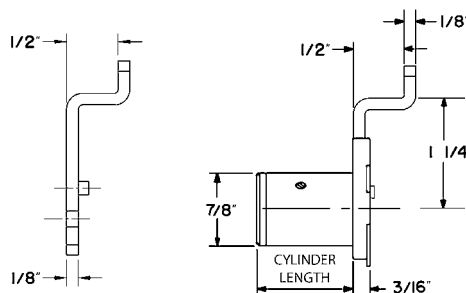

## 500/600 :: Deadbolt Lock

### GENERAL FEATURES:

**Keying:** Can be keyed together with other R Series locks

**Rekeyable:** Easily rekeyable via set screw cylinder release mechanism

**ANSI/BHMA:** Tested to ANSI/BHMA A156.11 Grade 1 cycle testing. Withstood in excess of 40,000 cycles with no damage. All other requirements of ANSI/BHMA A156.11, no less than Grade 2 performance was attained.

**US Patent Nos:** 4,899,563; 4,920,774

**Body:** Zinc die cast lock body

**Cylinder:** Solid brass pin tumbler cylinder

**Barrel diameter:** 7/8"

**500DR includes:** 56-1 bar strike

**600DW includes:** 12-3 angle strike

**Finish:** 26D, US4 or 10B

**Packaged:** Packed 10 per box

### KEYING INFORMATION:

**Keyway:** CCL R1

**Stock keying:** KD/KA - 5 pin standard

**Stock KA#:** 4T21579, 4T37526

**Masterkeying:** 5 pin standard, 6 pin available

**Keyblank 5-pin:** KBR-5-NP (equivalent to C0106, 1003A)

**Keyblank 6-pin:** KBR-6-NP (equivalent to L1003A)



**500DR**  
DOOR



**600DW**  
DRAWER

Item	Function	Finish	Cyl. Length	Type	Keying
500DR	Door	26D, US4, 10B	15/16"	Deadbolt	KD, KA 4T21579, 4T37526 Custom Keyed
500DR	Door	26D, US4	1-3/8"	Deadbolt	

**Key-Retaining:** Specify item 500KL for left-hand doors and 500KR for right-hand doors.




Item	Function	Finish	Cyl. Length	Type	Keying
600DW	Drawer	26D, US4, 10B	15/16"	Deadbolt	KD, KA 4T21579, 4T37526 Custom Keyed
600DW	Drawer	26D, US4, 10B	1-3/8"	Deadbolt	

**Key-Retaining:** Specify item 600KI for inverted drawers and 600KV for vertical drawers.

**ACCESSORIES:** For a complete list, see the accessories section of this catalog.

- > WP21 spacer (3/32" thickness)
- > WP22 spacer (1/4" thickness)
- > WP23 spacer (1/2" thickness)
- > 07S, 12-1, 12-2, 12-4, 56-1 strikes
- > TR1256 trim rings
- > Through-bolt plate ETS2, trim pull ETS2-PL and template ETST2 for through-bolt mount

### KEY-RETAINING CHART

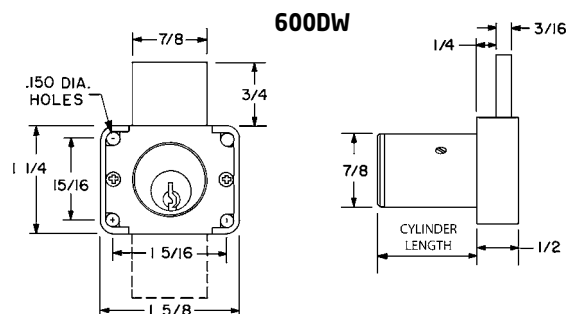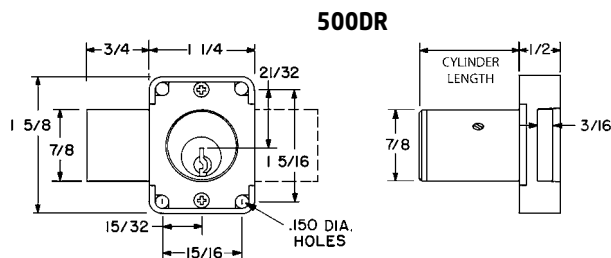

## DCR :: Cam Locks

### GENERAL FEATURES:

**Keying:** Can be keyed together with other R Series locks

**Rekeyable:** Easily rekeyable via cylinder retainer clip

**ANSI/BHMA:** Grade 1

**US Patent Nos:** 5,038,589; 5,737,950

**Body:** Zinc die cast lock body

**Cylinder:** Zinc die cast pin tumbler cylinder

**Functions:** Non-key retaining (standard), alternate key-retaining shifters are available separately

**Cams:** 2 reversible cams work in all positions

**Face:** 1" face covers splintering, no additional trim ring required

**Finish:** 26D or US3

**Packaged:** Packed 10 per box

### KEYING INFORMATION:

**Keyway:** CCL R1 keyway

**Stock keying:** KD/KA - 5 pin standard

**Stock KA#s:** 4T21579, 4T37526

**Masterkeying:** 5 pin standard

**Keyblank 5-pin:** KBR-5-NP (equivalent to C0106, 1003A)

### INCLUDES:


See chart below.

**ACCESSORIES:** See page 53 for a complete list of:

- > Optional cams and accessories for 3/4" cam locks




### MOUNTING CUTOUT



Item	Finish	Cyl. Length*	Type	Keying
DCR1	26D, US3	1-1/16"	Cam Lock	KD, KA 4T21579, 4T37526 Custom Keyed
DCR2	26D, US3	1-3/16"	Cam Lock	
DCR3	26D, US3	1-7/16"	Cam Lock	
DCR4	26D, US3	1-3/4"	Cam Lock	

\*Cyl. Length: As measured with straight cam.

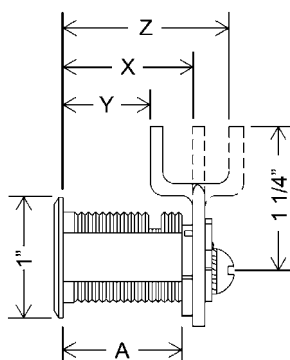

### DIMENSIONS

	For Mat. Thickness	Straight Cam (X)	Inbent Cam (Y)	Outbent Cam (Z)	Cylinder Length (A)
DCR1	3/4"	1-1/16"	3/4"	1-3/8"	1"
DCR2	7/8"	1-3/16"	7/8"	1-1/2"	1-1/8"
DCR3	1-1/8"	1-7/16"	1-1/8"	1-3/4"	1-3/8"
DCR4	1-1/2"	1-13/16"	1-1/2"	2-1/8"	1-3/4"

### DCR LOCKS SHIP STANDARD WITH THE FOLLOWING PARTS:

<b>DCNP-200-OCD</b> lost motion, non-key retaining cam shifter	<b>DCNP-500-ARP</b> anti-rotation plate	<b>DCNP-100-SC</b> straight cam	<b>DCNP-100-BC</b> offset reversible cam

### BELOW KEY-RETAINING SHIFTERS SOLD SEPARATELY

<b>DCNP-200-KR</b> key-retaining drawer cam shifter
<b>DCNP-200-KDR</b> key-retaining door cam shifter



## 400SD :: Plunger Lock

### GENERAL FEATURES:

**Keying:** Can be keyed together with other R Series locks

**Rekeyable:** Easily rekeyable via speed-release cylinder release mechanism

**US Patent Nos:** 4,920,774; 5,121,619

**Body:** Zinc die cast lock body

**Cylinder:** Solid brass pin tumbler cylinder

**Barrel length:** 1"

**Barrel diameter:** 1"

**Finish:** 26D, US3 or 10B

**Packaged:** Packed 10 per box

### KEYING INFORMATION:

**Keyway:** CCL R1 Keyway

**Stock keying:** KD/KA - 5 pin standard

**Stock KA#:** 4T21579, 4T37526

**Masterkeying:** 5 pin standard

**Keyblank 5-pin:** KBR-5-NP

(equivalent to C0106, 1003A)


### INCLUDES:

10-24 machine thread bolt extender for

varying gaps between bypassing doors

10-24 machine thread strike locator

Matching thimble strike

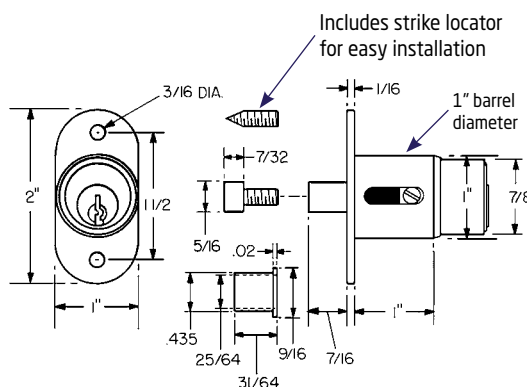

Item	Finish	Cyl. Length	Type	Keying
400SD	26D, US3, 10B	1"	Plunger Lock	KD, KA 4T21579, 4T37526 Custom Keyed

## 429R :: Showcase/Ratchet Lock

### GENERAL FEATURES:

**Keying:** Can be keyed together with other R Series locks

**Rekeyable:** Easily rekeyable via speed-release cylinder release mechanism

**US Patent No:** 5,121,619

**Body:** Zinc die cast lock body

**Cylinder:** Solid brass pin tumbler cylinder

**Strap:** Strap fits 1/4" material

**Finish:** 26D

**Packaged:** Packed 10 per box

### KEYING INFORMATION:

**Keyway:** CCL R1 Keyway

**Stock keying:** KD/KA - 5 pin standard

**Stock KA#:** 4T21579, 4T37526

**Masterkeying:** 5 pin standard



**Keyblank 5-pin:** KBR-5-NP

(equivalent to C0106, 1003A)



Item	Finish	Type	Keying
429R	26D	Ratchet Lock	KD, KA 4T21579, 4T37526 Custom Keyed

### STRAP DIMENSIONS

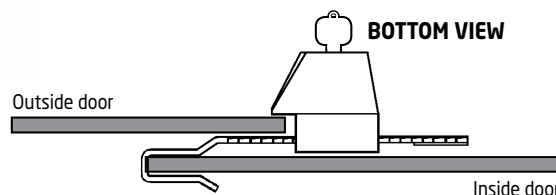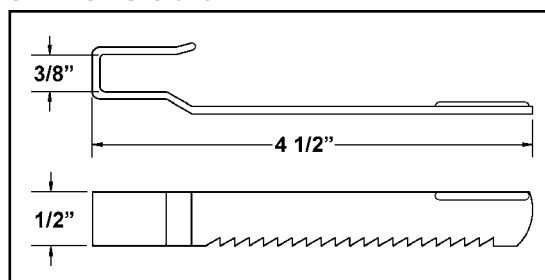

## 996/997 :: Latch Lock

### GENERAL FEATURES:

**Keying:** Can be keyed together with other R Series locks

**Reversible:** Easily reversible between door and drawer function

**Rekeyable:** Easily rekeyable via set screw cylinder release mechanism

**US Patent Nos:** 4,899,563; 7,874,189 B2

**Body:** Zinc die cast lock body

**Cylinder:** Solid brass pin tumbler cylinder

**Barrel diameter:** 7/8"

**Includes:** Matching latch strike

**Finish:** 26D or US4

**Packaged:** Packed 10 per box

### KEYING INFORMATION:

**Keyway:** CCL R1 Keyway

**Stock keying:** KD/KA - 5 pin standard

**Stock KA#:** 4T21579, 4T37526

**Masterkeying:** 5 pin standard, 6 pin available


**Keyblank 5-pin:** KBR-5-NP (equivalent to C0106, 1003A)

**Keyblank 6-pin:** KBR-6-NP (equivalent to L1003A)

**ACCESSORIES:** For a complete list, see the accessories section of this catalog.

- > WP24 spacer (1/8" thickness)
- > TR1256 trim rings
- > Reinforcing trim spacers ETS6 and template ETST6 for through-bolt mount

### HANDING CHART



996V



996I



997L




997R


**Field reversible into all four handings!**

Item	Function	Finish	Cyl. Length	Type	Keying
997R	RH Door	26D, US4	15/16" or 1-3/8"	Latch	KD, KA 4T21579, 4T37526 Custom Keyed
997L	LH Door	26D, US4	15/16" or 1-3/8"	Latch	
996V	VH Drawer	26D, US4	15/16" or 1-3/8"	Latch	
996I	IH Drawer	26D, US4	15/16" or 1-3/8"	Latch	
Field Reversible: Locks are easily reconfigured in the field into any of the other three handings.					


### 997L LEFT HAND

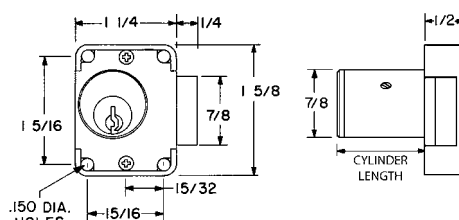


### 997R RIGHT HAND

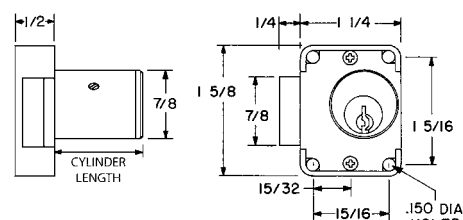

### 996V VERTICAL HAND

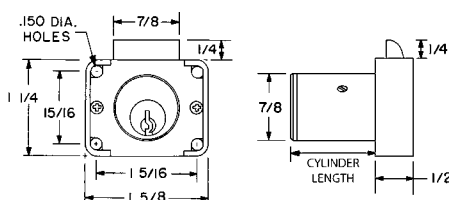

### 996I INVERTED HAND

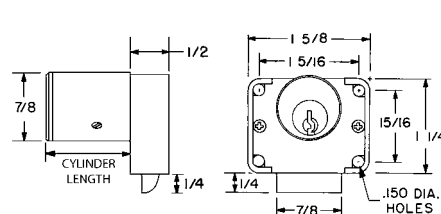

## R078 :: Deadbolt Lock

### GENERAL FEATURES:

**Keying:** Can be keyed together with other R Series locks

**Rekeyable:** Easily rekeyable via set screw cylinder release mechanism

**US Patent Nos:** 4,899,563; 4,920,774

**Body:** Zinc die cast lock body

**Cylinder:** Solid brass pin tumbler cylinder

**Barrel length:** 1-1/8"

**Barrel diameter:** 7/8"

**Finish:** 26D or US4

**Packaged:** Packed 10 per box

### KEYING INFORMATION:

**Keyway:** CCL R1 Keyway

**Stock keying:** KD/KA - 5 pin standard

**Stock KA#:** 4T21579, 4T37526

**Masterkeying:** 5 pin standard

**Keyblank 5-pin:** KBR-5-NP (equivalent to C0106, 1003A)




R078

Item	Finish	Cyl. Length	Type	Available Keying
R078	26D, US4	1-1/8"	Deadbolt	KD, KA 4T21579, 4T37526 Custom Keyed


**ACCESSORIES:** For a complete list, see the accessories section of this catalog.

- > WP21 spacer (3/32" thickness)
- > WP22 spacer (1/4" thickness)
- > WP23 spacer (1/2" thickness)
- > 07S, 56-1, 12-1, 12-2, 12-4 strikes
- > TR1256 trim ring
- > 078-LB1-DW optional 1/2" outbent drawer bolt
- > Reinforcing trim spacer ETS3 and template ETST3 for through-bolt mount

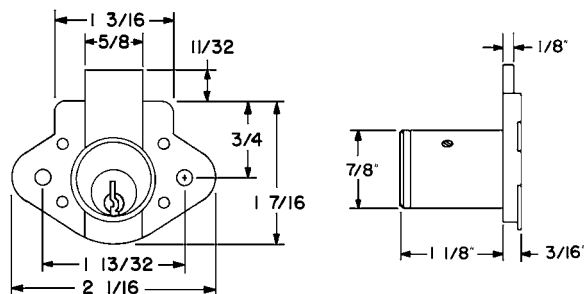


### AVAILABLE SEPARATELY

#### 078-LB1-DW - 1/2" outbent drawer bolt

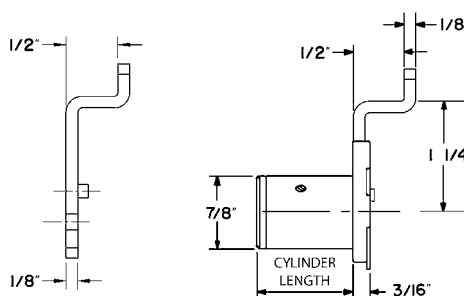

### HANDING CHART



## DCP :: Padlockable Cam Lock (standard)

### GENERAL FEATURES:

**Function:** Cam lock for use with padlock as locking device. Functions on doors or drawers. Ideal for locker applications.

**Through-hole:** 0.4"

**Padlocks:** Available separately from Olympus Lock, Inc.

**Max. material thickness:** 1-1/8"

**Barrel diameter:** 3/4"

**Finish:** US26, US3, US19

**Packaged:** Packed 15 per box

### INCLUDES:

DCNP-500-ARP anti-rotation plate

DCP-SC straight 7/8" cam

DCP-LC straight 1-1/4" cam

Spacer ring

### PADLOCKS:

See Olympus Lock's complete line of brass padlocks at the back of this catalog for use with the DCP. This item will also work with most other manufacturer's padlocks with shackle diameter of 3/8" (10 mm) or less.




Item	Finish	Cyl. Length	Description
DCP	US26, US3, US19	1-7/32"	Accepts most standard padlocks with a shackle diameter of 3/8" (10 mm) or less

### OPTIONAL ACCESSORIES:

See cams below.


### AVAILABLE CAMS:



#### STRAIGHT CAMS:


Part No.	Dim. A
DCP-58	5/8"
DCP-SC**	7/8"
DCP-LC**	1-1/4"
DCP-LC-112	1-1/2"
DCP-LC-134	1-3/4"
DCP-LC-225	2-1/4"
DCP-LC-250	2-1/2"

\*\*These cams ship standard with each lock

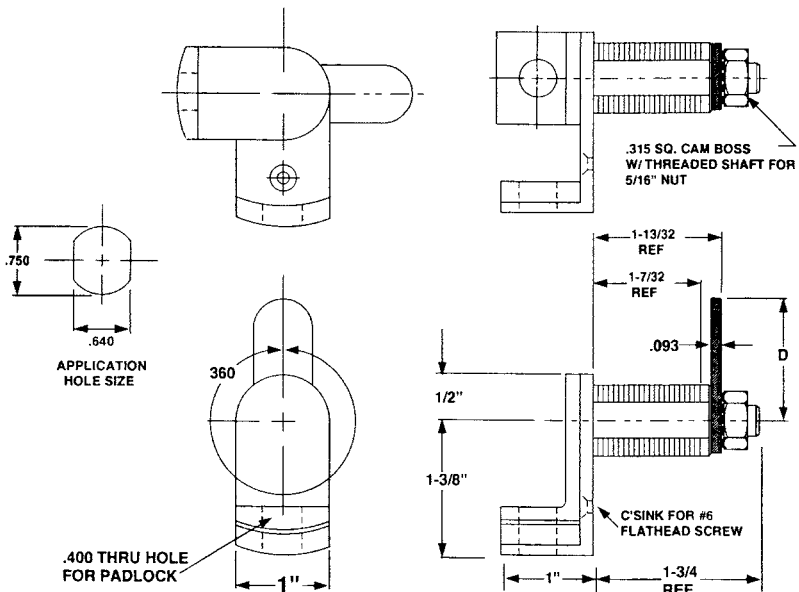


### OFFSET CAMS:

Part No.	Dim. A	Dim. B
DCP-1-14	1"	1/4"
DCP-LBC	1-1/4"	1/4"
DCP-114-18	1-1/4"	1/8"
DCP-118-18	1-1/8"	1/8"
DCP-LBC-138	1-3/8"	3/8"
DCP-LBC-178	1-7/8"	1/2"
DCP-112-14	1-1/2"	1/4"




### TYPICAL DOOR CONFIGURATION

#### LOCKED POSITION



#### UNLOCKED POSITION





# PADLOCKABLE :: Cam Lock

## DCP500 :: Padlockable Cam Lock (premium)

### GENERAL FEATURES:

**Function:** Cam lock for use with padlock as locking device. Functions on doors or drawers. Ideal for locker applications.

**Through-hole:** 0.4"

**Padlocks:** Available separately from Olympus Lock, Inc.

**Max. material thickness:** 1-1/8"

**Barrel diameter:** 3/4"

**Finish:** US26, US26D

**Packaged:** Packed 10 per box

### INCLUDES:

DCP-LC straight 1-1/4" cam

Spacer ring

Pronged wood washer

### OPTIONAL ACCESSORIES:

See cams below.

### PADLOCKS:


See Olympus Lock's complete line of brass padlocks at the back of this catalog for use with the DCP500. This item will also work with most other manufacturer's padlocks with shackle diameter of 3/8" (10 mm) or less.



Includes:

Item	Finish	Cyl. Length	Description
DCP	26D, US26	1-7/32"	Accepts most standard padlocks with a shackle diameter of 3/8" (10 mm) or less


### AVAILABLE CAMS:



#### STRAIGHT CAMS:


Part No.	Dim. A
DCP-58	5/8"
DCP-SC	7/8"
DCP-LC**	1-1/4"
DCP-LC-112	1-1/2"
DCP-LC-134	1-3/4"
DCP-LC-225	2-1/4"
DCP-LC-250	2-1/2"

\*\*This cam ships standard with each lock

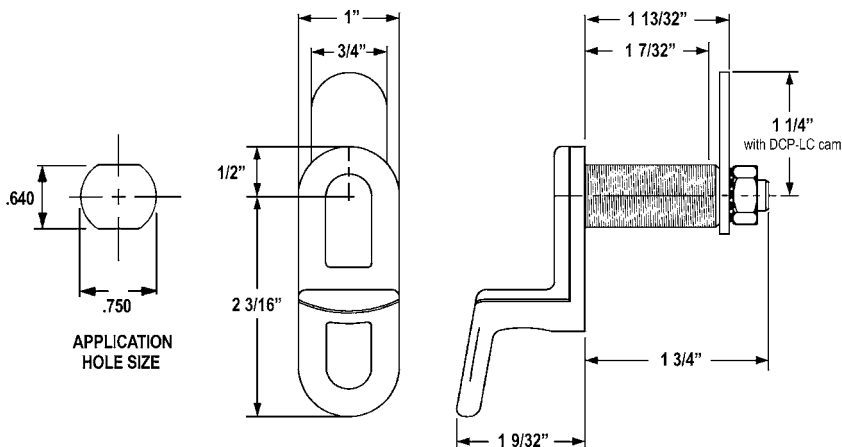


### OFFSET CAMS:

Part No.	Dim. A	Dim. B
DCP-1-14	1"	1/4"
DCP-LBC	1-1/4"	1/4"
DCP-114-18	1-1/4"	1/8"
DCP-118-18	1-1/8"	1/8"
DCP-LBC-138	1-3/8"	3/8"
DCP-LBC-178	1-7/8"	1/2"
DCP-112-14	1-1/2"	1/4"




### TYPICAL DOOR CONFIGURATION

#### LOCKED POSITION



Remove padlock to open hasp

#### UNLOCKED POSITION



Front arm of hasp will swing down lifting cam

# SCHLAGE STYLE :: Standard Cylinder

## 700S/800S :: Deadbolt Locks

### GENERAL FEATURES:

**Rekeyable:** Easily rekeyable via set screw cylinder release mechanism

**ANSI/BHMA:** Passed ANSI/BHMA A156.11 grade 1 cycle testing, obtained grade 2 performance for all other requirements

**US Patent Nos:** 4,899,563; 4,920,774

**Body:** Zinc die cast lock body

**Cylinder:** Will accept other manufacturer's Schlage compatible key-in-knob cylinders

**Barrel lengths:** 1-1/8" or 1-3/8"

**Barrel diameter:** 1-1/8"

**Finish:** 26D, US3, 10B

**Packaged:** Packed 10 per box

### KEYING INFORMATION:

**Keyway:** Schlage C keyway

**Cylinder:** Solid brass pin tumbler cylinder

**Stock keying:** KD/KA - 5 pin standard

**Stock KA#:** 101, 102, O-Bit

**Masterkeying:** 5 pin standard, 6 pin available

**Keyblank 5-pin:** KBSC-5

**Keyblank 6-pin:** KBSC-6

### 1-1/8 LOCK INCLUDES:

10-350 plastic spacers (qty 2)

10-054 1/4" plastic bar strike


10-055 1/2" plastic bar strike

### 1-3/8 LOCK INCLUDES:

10-054 1/4" plastic bar strike

**ACCESSORIES:** For a complete list, see the accessories section of this catalog.

- > 10-348 spacer (1/4" thickness)
- > 10-349 spacer (1/2" thickness)
- > 10-350 spacer (1/8" thickness)
- > 10-052, 12-2, 12-4 strikes
- > TR78 trim ring
- > Reinforcing trim spacers ETS1, trim pull ETS1-PL and template ETST1 for through-bolt mount

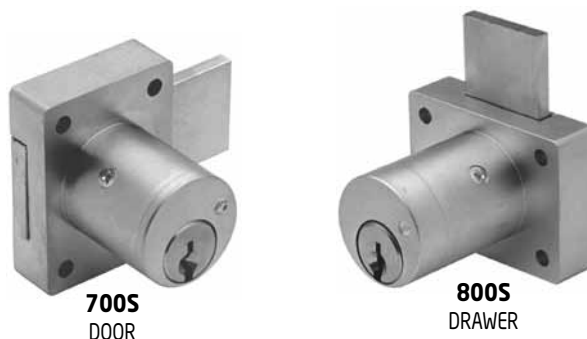

### 700S/800S STANDARD FUNCTION

Item	Function	Finish	Cyl. Length	Type	Keying
700S	Door	26D, US3, 10B	1-1/8" or 1-3/8"	Deadbolt	KD, KA 101,102, O-Bit Custom Keyed
800S	Drawer	26D, US3, 10B	1-1/8" or 1-3/8"	Deadbolt	


**Note:** 10B finish not available on 700S 1-3/8"

### 700S/800S KEY-RETAINING


Item	Handing	Finish	Cyl. Length	Type	Keying
700KL	LH Door-KR	26D, US3, 10B	1-1/8" or 1-3/8"	Deadbolt	KD, KA 101,102 O-Bit Custom Keyed
700KR	RH Door-KR	26D, US3, 10B	1-1/8" or 1-3/8"	Deadbolt	
800KI	IH Drawer-KR	26D, US3, 10B	1-1/8" or 1-3/8"	Deadbolt	
800KV	VH Drawer-KR	26D, US3, 10B	1-1/8" or 1-3/8"	Deadbolt	

**Note:** 10B finish not available on 700KL 1-3/8" or 700KR 1-3/8"


### KEY-RETAINING CHART



### 700S / 700LC

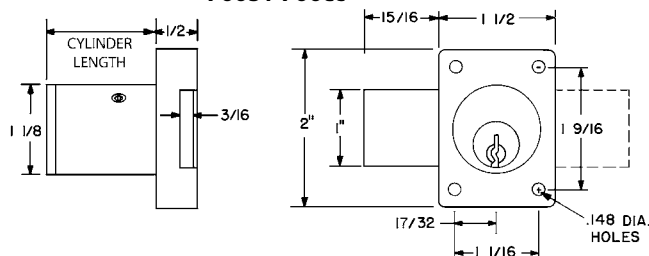

### 800S / 800LC

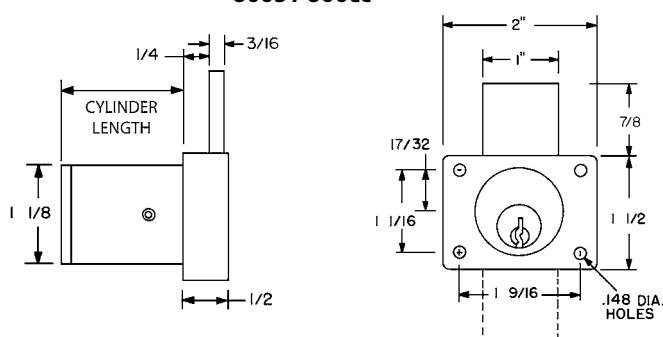

# SCHLAGE STYLE :: Standard Cylinder

## 700LC/800LC :: Deadbolt Locks

### GENERAL FEATURES:

**Rekeyable:** Easily rekeyable via set screw cylinder release mechanism

**ANSI/BHMA:** Passed ANSI/BHMA A156.11 grade 1 cycle testing, obtained grade 2 performance for all other requirements

**US Patent Nos:** 4,899,563; 4,920,774

**Body:** Zinc die cast lock body

**Cylinder:** Will accept other manufacturer's Schlage compatible key-in-knob cylinders

**Barrel lengths:** 1-1/8" or 1-3/8"

**Barrel diameter:** 1-1/8"

**Finish:** 26D, US3, 10B

**Packaged:** Packed 10 per box

### 1-1/8 LOCK INCLUDES:

10-350 plastic spacers (qty 2)

10-054 1/4" plastic bar strike

10-055 1/2" plastic bar strike

### 1-3/8 LOCK INCLUDES:

10-054 1/4" plastic bar strike

### KEYING INFORMATION:

**Keyway:** Less cylinder

**Includes:** All parts necessary to work with other manufacturers cylinders

**ILCO cylinder:** #1599

**Assa cylinder:** #65611

(Requires 1-3/8" barrel length locks)

**Medeco cylinders:**

(Requires 1-3/8" barrel length locks)

Original: 6 pin #20-009S4

5 pin #20-008S4

Biaxial: 6 pin #20W009S4

5 pin #20W008S4

Keymark: 6 pin #20K009S4

Key retaining cylinder:

#20W200S1


**Compatible electronic cylinders:** Medeco

LOGIC, ASSA CLIQ or VIDEX CyberLock key-

in-knob cylinders

**ACCESSORIES:** For a complete list, see the accessories section of this catalog.

- > 10-348 spacer (1/4" thickness)
- > 10-349 spacer (1/2" thickness)
- > 10-350 spacer (1/8" thickness)
- > 10-052, 12-2, 12-4 strikes
- > TR78 trim ring
- > Reinforcing trim spacers ETS1, trim pull ETS1-PL and template ETST1 for through-bolt mount
- > 78-KABA-CONV conversion kit for KABA-Peaks or Mul-T-Lock cylinders



For SCHLAGE style original or replacement cylinders



**700LC**  
DOOR



**800LC**  
DRAWER

### 700LC/800LC LESS CYLINDER

Item	Function	Finish	Cyl. Length	Type	Keying
700LCA	Door	26D, US3, 10B	1-1/8"	Deadbolt	Less Cylinder
700LCM	Door	26D, US3	1-3/8"	Deadbolt	
800LCA	Drawer	26D, US3, 10B	1-1/8"	Deadbolt	
800LCM	Drawer	26D, US3, 10B	1-3/8"	Deadbolt	

**Note:** 700LCM/800LCM locks are required for use with Medeco or Assa cylinders.

<-- SEE OPPOSITE PAGE FOR DIMENSIONS

## 78-KABA-CONV :: Kaba Conversion Kit


For use with 700LC or 800LC (less cylinder) locks and KABA original cylinders

- > Order part number 78-KABA-CONV
- > Works with KABA-Peaks universal cylinder #3400-XX-1099 (where "XX" denotes finish)
- > Will also work with Mul-T-Lock cylinders

The conversion kit requires the use of the C-form flat washer supplied with the KABA-Peaks cylinder. The washer is needed to keep the Olympus tailpiece on center while operating the lock.

### 78-KABA-CONV

Conversion kit includes:

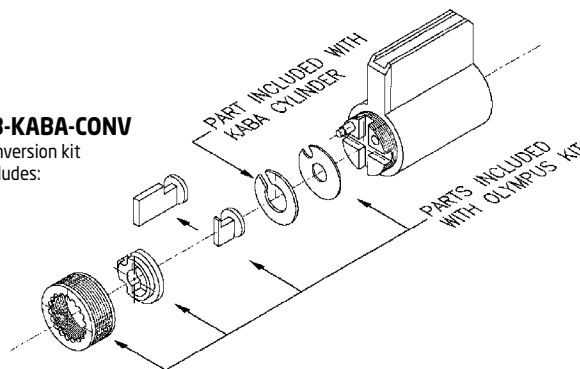

# SCHLAGE STYLE :: Standard Cylinder

## L78/L78-LC :: Latch Lock

### GENERAL FEATURES:

**Reversible:** Easily field reversible between door and drawer functions

**Rekeyable:** Easily rekeyable via set screw cylinder release mechanism

**US Patent Nos:** 4,899,563; 7,874,189 B2

**Body:** Zinc die cast lock body

**Barrel lengths:** 1-1/8" or 1-3/8"

**Barrel diameter:** 1-1/8"

**Finish:** 26D or US3

**Packaged:** Packed 10 per box

### 1-1/8 LOCK INCLUDES:

10-351 plastic spacers (qty 2)

L78ST-1 lipped strike

### 1-3/8 LOCK INCLUDES:

L78ST-2 lipped strike

### L78 KEYING INFORMATION:

**Keyway:** Schlage C keyway

**Cylinder:** Solid brass pin tumbler cylinder

**Stock keying:** KD/KA - 5 pin standard

**Stock KA#:** 101, 102


**Masterkeying:** 5 pin standard, 6 pin available

**Keyblank 5-pin:** KBSC-5

**Keyblank 6-pin:** KBSC-6

**ACCESSORIES:** For a complete list, see the accessories section of this catalog.

- > TR78 trim ring
- > 10-351 spacer (1/8" thickness)

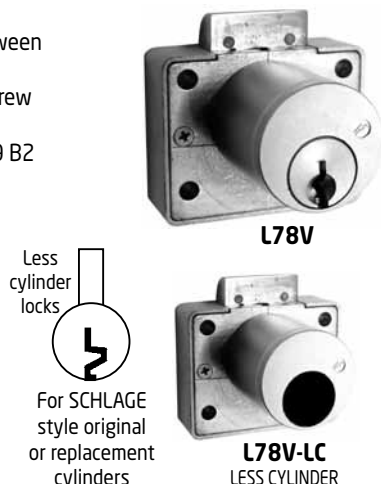

L78I



L78I-LC  
LESS CYLINDER



L78L



L78L-LC  
LESS CYLINDER



L78R



L78R-LC  
LESS CYLINDER

**Field reversible into all four handings!**

### L78-LC KEYING INFORMATION:

**Cylinder:** Will accept other manufacturer's Schlage compatible key-in-knob cylinders

**Keyway:** Less cylinder

**Includes:** All parts necessary to work with other manufacturers Schlage compatible key-in-knob cylinders


**Accepts:** ILCO cylinder #1599

**Compatible electronic cylinders:**


Medeco LOGIC, ASSA CLIQ or VIDEX

CyberLock key-in-knob cylinders


### L78V/L78V-LC - VERTICAL HAND (VH)

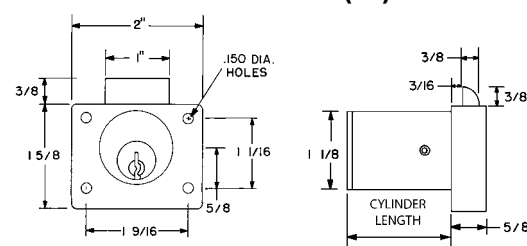


### L78I/L78I-LC - INVERTED HAND (IH)

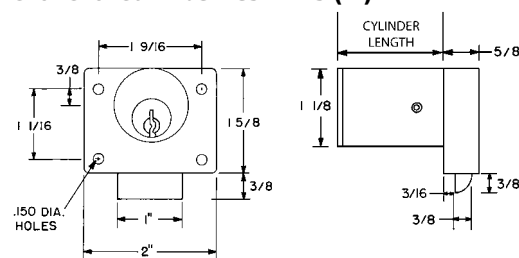

### L78L/L78L-LC - LEFT HAND (LH)

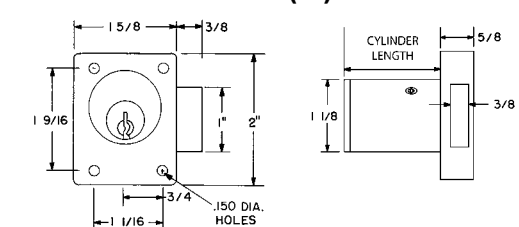

### L78R/L78R-LC - RIGHT HAND (RH)

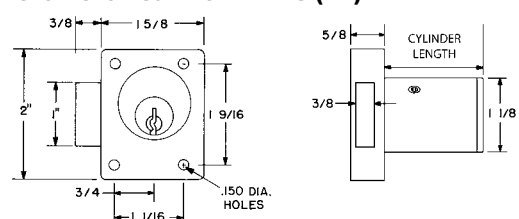

### L78 WITH SCHLAGE C KEYWAY

Item	Function	Finish	Cyl. Length	Type	Keying
L78R	RH Door	26D, US3	1-1/8" or 1-3/8"	Latch	KD, KA 101, 102 Custom Keyed
L78L	LH Door	26D, US3	1-1/8" or 1-3/8"	Latch	
L78V	VH Drawer	26D, US3	1-1/8" or 1-3/8"	Latch	
L78I	IH Drawer	26D, US3	1-1/8" or 1-3/8"	Latch	

**Field Reversible:** Lock can be easily reconfigured into any of the other three handings.

### L78-LC LESS CYLINDER

Item	Function	Finish	Cyl. Length	Type	Keying
L78R-LCA	RH Door	26D, US3	1-1/8"	Latch	Less Cylinder
L78R-LCM	RH Door	26D, US3	1-3/8"	Latch	
L78L-LCA	LH Door	26D, US3	1-1/8"	Latch	
L78L-LCM	LH Door	26D, US3	1-3/8"	Latch	
L78V-LCA	VH Drawer	26D, US3	1-1/8"	Latch	
L78V-LCM	VH Drawer	26D, US3	1-3/8"	Latch	
L78I-LCA	IH Drawer	26D, US3	1-1/8"	Latch	
L78I-LCM	IH Drawer	26D, US3	1-3/8"	Latch	

**Field Reversible:** Lock can be easily reconfigured into any of the other three handings.



# SCHLAGE STYLE :: Standard Cylinder

## 820S/820LC :: Cam Lock

### GENERAL FEATURES:

**Rekeyable:** Easily rekeyable via set screw on back of lock body

**ANSI/BHMA:** Passed ANSI/BHMA A156.11 Grade 1 performance requirements

**U.S. Patent No:** 7,716,958 B2

**Cylinder diameter:** 1-1/8"

**Across flats:** 7/8"

**Maximum material thickness:** 1-3/8"

**Min. material thickness:** 0.08"

**Body:** Zinc die cast lock body

**Functions:** Includes parts for key-retaining or non-key-retaining

**Finish:** 26D or US3

**Packaged:** Packed 10 per box

### 820S KEYING INFORMATION:

**Keyway:** Schlage "C" Keyway

**Cylinder:** Solid brass pin tumbler cylinder

**Stock Keying:** KD/KA - 5 pin standard

**Stock KA#:** 101, 102, 0-Bit

**Masterkeying:** 5 pin standard, 6 pin available

**Keyblank 5-pin:** KBSC-5

**Keyblank 6-pin:** KBSC-6

### 820LC KEYING INFORMATION:

**Cylinder:** Accepts Schlage-compatible key-in-knob cylinders (does not accept Medeco cylinder)

**Includes:** All parts to work with other cylinders

**Accepts:** ILCO cylinder #1599

**Compatible electronic cylinders:** Medeco LOGIC, ASSA CLIQ or VIDEX CyberLock key-in-knob cylinders

### INCLUDES:

720-PL3 anti-rotation plate

720-3-1 short inverted cam

720-3-2 long vertical cam


720-CDLM lost motion cam shifter

720-CDDM key retaining door cam shifter

720-KR key retaining drawer cam shifter

**ACCESSORIES:** See pages 62-63 for a complete list of:


- > Optional cams
- > Trim collars/spacer rings
- > SW-1 switch accessory pack




For SCHLAGE style original or replacement cylinders



### MOUNTING CUTOUT



Item	Finish	Cyl. Diameter	Mat. Thickness	Type	Keying
820S	26D, US3	1-1/8"	Up to 1-3/8"	Cam Lock	KD, KA 101, 102, 0-Bit Custom Keyed
820LC	26D, US3	1-1/8"	Up to 1-3/8"	Cam Lock	Less Cylinder

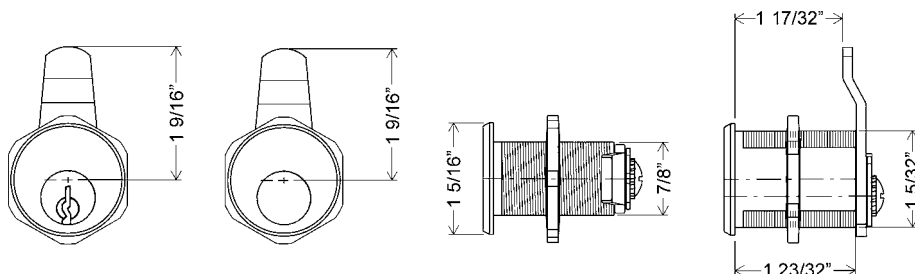

### SHIPS STANDARD WITH THE FOLLOWING CAMS

	May includes either 720-3-2 (mid-pin style) or 720-3-2 (bottom-pin style)	
<b>720-3-1</b> for inverted function	<b>720-3-2</b> inbent cam for vertical function (mid-pin style)	<b>720-3-2</b> inbent cam for vertical function (bottom-pin style)

# SCHLAGE STYLE :: Standard Cylinder

## 829R/829R-LC :: Showcase/Ratchet Lock

### GENERAL FEATURES:

**Rekeyable:** Easily rekeyable via set screw cylinder release mechanism

**ANSI/BHMA:** Complies with clause 6.3 (8.2~8.4) of ANSI/BHMA A156.11 1999 ANSI standards

**Body:** Zinc die cast lock body

**Cylinder:** Will accept other manufacturer's Schlage compatible key-in-knob cylinders

**Finish:** 26D

**Packaged:** Packed 10 per box

### INCLUDES:

729RS-1 strap for 3/16" to 1/4" material thicknesses

### 829R-LC KEYING INFORMATION:

**Includes:** All parts necessary to work with other manufacturers Schlage compatible cylinders.

**Will accept:** Other manufacturer's Schlage compatible key-in-knob cylinders

**Accepts:** ILCO cylinder #1599

**Medeco cylinders:** Requires optional 829-MD Medeco Driver Pack (available separately.) Will accept the following Medeco cylinders

Original: 6 pin #20-009S4

5 pin #20-008S4

Biaxial: 6 pin #20W009S4

5 pin #20W008S4

Keymark: 6 pin #20K009S4

Key retaining cylinder:

#20W200S1

**Compatible electronic cylinders:**

Medeco LOGIC, ASSA CLIQ or VIDEX

CyberLock key-in-knob cylinders

### 829R KEYING INFORMATION:

**Keyway:** Schlage C keyway

**Cylinder:** Solid brass pin tumbler cylinder

**Stock keying:** KD/KA - 5 pin standard

**Stock KA#:** 101, 102, 0-Bit

**Masterkeying:** 5 pin standard, 6 pin available

**Keyblank 5-pin:** KBSC-5


**Keyblank 6-pin:** KBSC-6



829R



829R-LC  
LESS CYLINDER



For SCHLAGE style original or replacement cylinders

### FOR BYPASSING SLIDING DOORS


Item	Finish	Mat. Thickness	Type	Keying
829R	26D	Up to 1/4"	Ratchet Lock	KD, KA 101, 102, 0-Bit Custom Keyed
829R-LC	26D	Up to 1/4"	Ratchet Lock	Less Cylinder
829-MD	Medeco Driver Pack (required if installing Medeco cylinders in LC product)			
Optional straps:	729RS-2 fits up to 3/8" material thickness 729RS-3 fits up to 5/8" material thickness (adjustable)			

### OPTIONAL STRAPS (SEE BELOW):


- > 729RS-2 strap for 3/8" material thickness
- > 729RS-3 strap for up to 5/8" material thickness

### OPTIONAL STRAPS

#### 729RS-2 STRAP DIMENSIONS




#### 729RS-3 STRAP DIMENSIONS

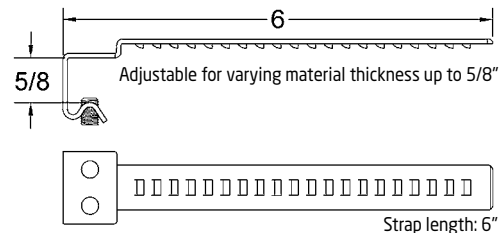

### DIMENSIONS

#### 829R / 829R-LC SERIES

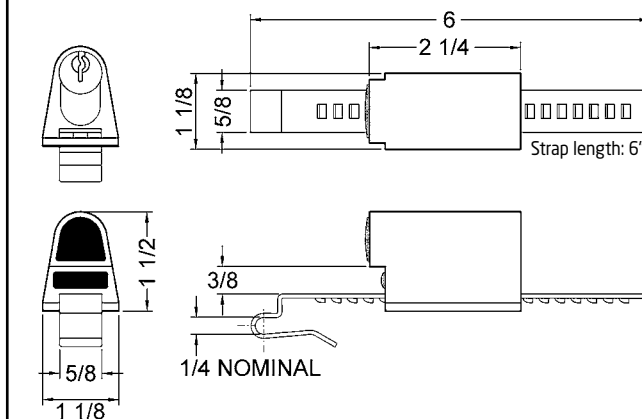

# SCHLAGE STYLE :: Standard Cylinder

## 850S/850LC :: Deadlatching Lock

### GENERAL FEATURES:

**Rekeyable:** Easily rekeyable via set-screw cylinder removal mechanism

**U.S. Patent Nos:** 4,899,563;  
4,920,774; 5,657,652

**Body:** Zinc die cast lock body

**Barrel lengths:** 1-1/8" or 1-3/8"

**Barrel diameter:** 1-1/8"

**Finish:** 26D or US3

**Packaged:** Packed 10 per box

### 1-1/8" LOCK INCLUDES:

10-350 plastic spacers (qty 2)  
850-210 matching strike

### 1-3/8" LOCK INCLUDES:

850-211 matching strike

### 850S KEYING INFORMATION:

**Keyway:** Schlage C keyway

**Cylinder:** Solid brass pin tumbler cylinder

**Stock keying:** KD/KA - 5 pin standard

**Stock KA#:** 101, 102

**Masterkeying:** 5 pin standard, 6 pin available

**Keyblank 5-pin:** KBSC-5

**Keyblank 6-pin:** KBSC-6

### 850LC KEYING INFORMATION:

**Includes:** All parts necessary to work with other manufacturers cylinders

**Less cylinder:** Will accept other manufacturer's Schlage compatible key-in-knob cylinders

**Accepts:** ILCO cylinder #1599

**Compatible electronic cylinders:**


Medeco LOGIC, ASSA CLIQ or VIDEX  
CyberLock key-in-knob cylinders



850S




850LC  
LESS CYLINDER




For SCHLAGE  
style original  
or replacement  
cylinders

Item	Function	Finish	Cyl. Length	Type	Keying
850S	VH Drawer	26D, US3	1-1/8"	Deadlatch	KD, KA 101, 102 Custom Keyed
850S	VH Drawer	26D, US3	1-3/8"	Deadlatch	
850LCA	VH Drawer	26D, US3	1-1/8"	Deadlatch	Less Cylinder
850LCM	VH Drawer	26D, US3	1-3/8"	Deadlatch	

### 850S SERIES

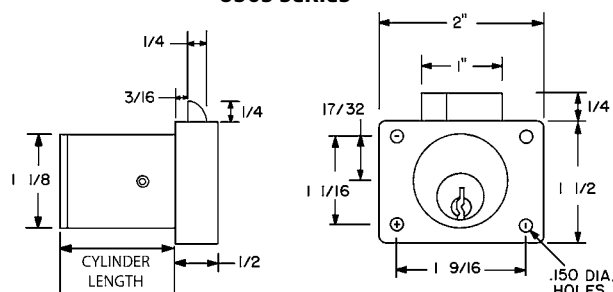

### 850LC SERIES

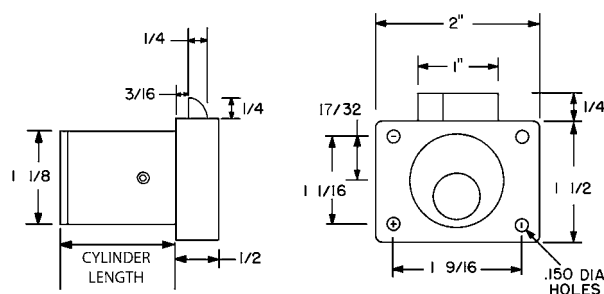

**ACCESSORIES:** For a complete list, see the accessories section of this catalog.

- > 10-350 spacer (1/8" thickness)
- > 10-348 spacer (1/4" thickness)
- > 10-349 spacer (1/2" thickness)
- > TR78 trim ring
- > Reinforcing trim spacer ETS1, cabinet pull ETS1-PL and template ETST1 for through-bolt mount

# SARGENT STYLE :: Less Cylinder

## 754LC/854LC :: Deadbolt Lock

### GENERAL FEATURES:

**Rekeyable:** Easily rekeyable via set-screw cylinder removal mechanism

**ANSI/BHMA:** Passed ANSI/BHMA A156.11 grade 1 cycle testing, obtained grade 2 performance for all other requirements

**US Patent Nos:** 4,899,563; 4,920,774

**Body:** Zinc die cast lock body

**Barrel length:** 1-3/8"

**Barrel diameter:** 1-1/8"

**Finish:** 26D or US3

**Packaged:** Packed 10 per box


### KEYING INFORMATION:

**Cylinder:** Not included.

**Accepts:** Sargent C480-2 (13-3457) 6-pin deadbolt cylinder

### INCLUDES:

All parts to work with Sargent original cylinders and 10-056 notched strike



Less cylinder locks  
For SARGENT original deadbolt-style cylinders



**754**  
DOOR



**854**  
DRAWER


**Accepts SARGENT C480-2 (13-3457) deadbolt cylinder**

Item	Function	Finish	Cyl. Length	Type	Description
754LC	Door	26D, US3	1-3/8"	Deadbolt	Less Cylinder - For use with Sargent C480-2 (13-3457) deadbolt cylinder
854LC	Drawer	26D, US3	1-3/8"	Deadbolt	


**ACCESSORIES:** For a complete list, see the accessories section of this catalog.

- > 10-352 slotted strike
- > 10-348 spacer (1/4" thickness)
- > 10-349 spacer (1/2" thickness)
- > 10-350 spacer (1/2" thickness)
- > TR78 trim ring
- > Reinforcing trim spacer ETS1, trim pull ETS1-PL and template ETST1 for through-bolt mount

### 754 SERIES

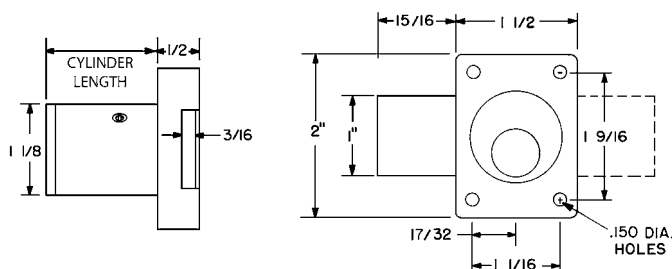

### 854 SERIES

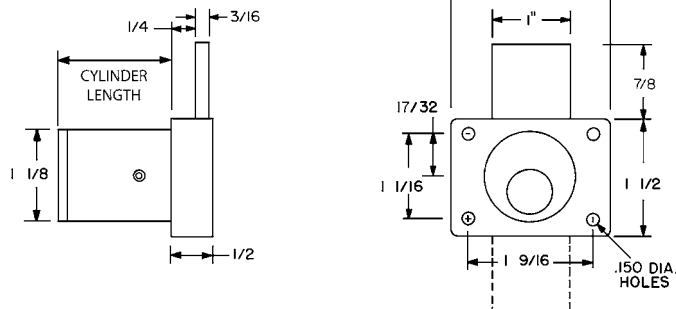

## SA54 :: Cam Lock

### GENERAL FEATURES:

**ANSI/BHMA:** Passed ANSI/BHMA

A156.11 Grade 1 performance requirements

**Cylinder diameter:** 1-1/8"

**Across flats:** 7/8"

**Max. material thickness:** 1-1/8"

**Min. material thickness:** 0.08"

**Functions:** Includes parts for key-retaining or non-key-retaining function

**Body:** Zinc die cast lock body

**Finish:** 26D

**Packaged:** Packed 10 per box

### KEYING INFORMATION:

**Cylinder:** Less cylinder

**Accepts:** Sargent 6300 Series

interchangeable core cylinders

**Note:** Use of Sargent "Degree" interchangeable cores requires purchase of alternate SA54-PD-DG prong driver.

### INCLUDES:

Plastic actuator to functionally test lock without core

720-PL3 anti-rotation plate

720-3-1 short inverted cam

720-3-2 long vertical cam

720-CDLM lost motion cam shifter

720-CDDM key retaining door cam shifter

720-KR key retaining drawer cam shifter


Prong driver for Sargent 6300 series

interchangeable cores


**ACCESSORIES:** See pages 62-63 for a complete list of:

- > Optional cams
- > Trim collars/spacer rings
- > SW-1 switch accessory pack

**NEW!**

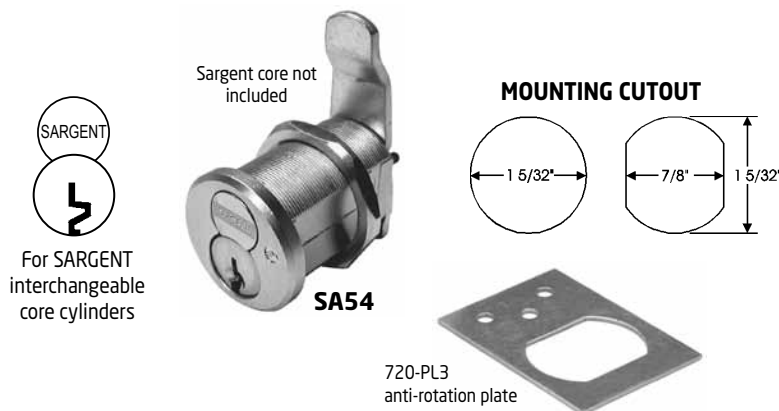

Item	Finish	Cyl. Diameter	Mat. Thickness	Type	Description
SA54LM/DM	26D	1-1/8"	Up to 1-1/8"	Cam Lock	Less Cylinder - For use with Sargent IC
SA54-PD-DG					Prong driver for Sargent "Degree" interchangeable cores (available separately)

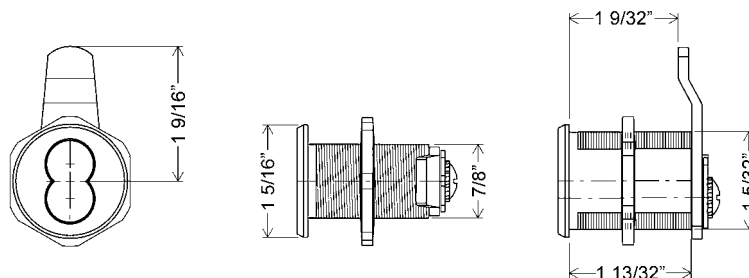

### SHIPS STANDARD WITH THE FOLLOWING CAMS

<p><b>720-3-1</b> for inverted function</p>	<p><b>720-3-2</b> inbent cam for vertical function</p>



## 777/888 :: Deadbolt Lock

### GENERAL FEATURES:

**ANSI/BHMA:** Passed ANSI/BHMA A156.11 Grade 1 performance requirements

**Standard function:** Key removable in locked and unlocked position.

**Key-retaining function:** Specify core type when ordering (Standard/Classic or Primus/Everest).

**Body:** Zinc die cast lock body

**Barrel length:** 1-7/16"

**Barrel diameter:** 1-1/8"

**Finish:** 26D, US3 or 10B

**Packaged:** Packed 10 per box

### KEYING INFORMATION:

**Cylinder:** Less cylinder

Accepts the following large format/full-size IC cylinders:

- > Schlage Quad, Numbered Section, and Schlage Classic IC cores
- > Schlage Primus® and Everest large format IC cores
- > Keymark large format IC Cores
- > Mul-T-Lock large format IC cores

**Compatible electronic cylinders:**

VIDEX CyberLock LFIC cylinders

### INCLUDES:

- 10-350 plastic spacers (qty 3)
- 10-054 1/4" plastic bar strike
- 10-055 1/2" plastic bar strike
- 7788-PA-D plastic actuator to operate lock without core

**ACCESSORIES:** For a complete list, see the accessories section of this catalog.

- > 10-350 spacer (1/8" thickness)
- > 10-348 spacer (1/4" thickness)
- > 10-349 spacer (1/2" thickness)
- > 10-052, 12-2, 12-4 strikes
- > TR78 trim ring
- > Through-bolt plates ETS1/ETS4/ETS5, trim pull ETS1-PL and template ETST1 for through-bolt mount



For SCHLAGE full-size interchangeable core cylinders

**777**  
DOOR



**888**  
DRAWER



Schlage core not included

### KEY REMOVABLE LOCKED OR UNLOCKED POSITION


Item	Function	Finish	Core	Type	Description
777IC-DR	Door	26D, US3, 10B	Standard/Classic or Primus/Everest	Deadbolt	Less Cylinder - For Schlage full-size IC
888IC-DW	Drawer	26D, US3, 10B	Standard/Classic or Primus/Everest	Deadbolt	

### KEY RETAINING (KEY REMOVABLE LOCKED POSITION ONLY)


Item	Function	Finish	Core	Type	Description
777IC-DRK	Door-KR	26D, US3, 10B	Standard/Classic	Deadbolt	Less Cylinder - For Schlage full-size IC
777P-DRK	Door-KR	26D, US3, 10B	Primus/Everest	Deadbolt	
888IC-DWK	Drawer-KR	26D, US3, 10B	Standard/Classic	Deadbolt	
888P-DWK	Drawer-KR	26D, US3, 10B	Primus/Everest	Deadbolt	

**Key-Retaining:** Cycle to "locked" position before inserting core.


### 777 SERIES

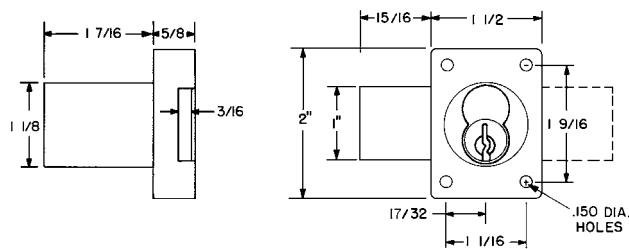

### 888 SERIES

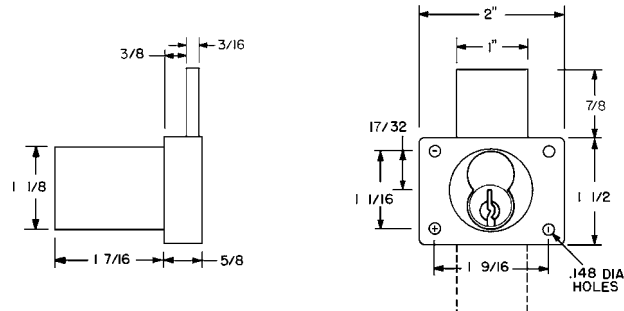

### KEY-RETAINING CHART



## 920 :: Cam Lock

### GENERAL FEATURES:

**ANSI/BHMA:** Passed ANSI/BHMA

A156.11 Grade 1 performance requirements

**Cylinder diameter:** 1-1/8"

**Across flats:** 7/8"

**Max. material thickness:** 1-1/8"

**Min. material thickness:** 0.08"

**Functions:** Includes parts for key-retaining or non-key-retaining function

**Body:** Zinc die cast lock body

**Finish:** 26D or US3

**Packaged:** 10 per box

### KEYING INFORMATION:

**Cylinder:** Less cylinder

Accepts the following large format/full-size IC cylinders:

- > Schlage Quad, Numbered Section, and Schlage Classic IC cores
- > Schlage Primus® and Everest large format IC cores
- > Keymark large format IC Cores
- > Mul-T-Lock large format IC cores

**Compatible electronic cylinders:** VIDEX CyberLock LFIC cylinders

### INCLUDES:

7788-PA-D plastic actuator to operate lock without core

720-PL3 anti-rotation plate

720-3-1 short inverted cam

720-3-2 long vertical cam


720-CDLM lost motion cam shifter

720-CDDM key retaining door cam shifter


720-KR key retaining drawer cam shifter

**ACCESSORIES:** See pages 62-63 for a complete list of:

- > Optional cams
- > Trim collars/spacer rings
- > SW-1 switch accessory pack

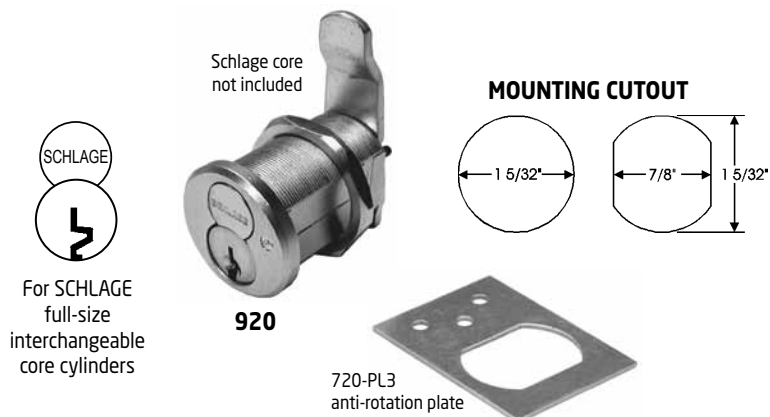

Item	Finish	Cyl. Diameter	Mat. Thickness	Type	Description
920LM/DM	26D, US3	1-1/8"	Up to 1-1/8"	Cam Lock	Less Cylinder - For Schlage full-size IC

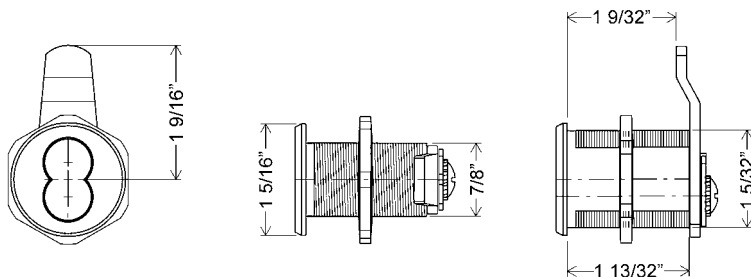

### SHIPS STANDARD WITH THE FOLLOWING CAMS

	May includes either 720-3-2 (mid-pin style) or 720-3-2 (bottom-pin style)	
<b>720-3-1</b> for inverted function	<b>720-3-2</b> inbent cam for vertical function (mid-pin style)	<b>720-3-2</b> inbent cam for vertical function (new bottom-pin style)

## 929R :: Showcase/Ratchet Lock

### GENERAL FEATURES:

**ANSI/BHMA:** Complies with clause 6.3 (8.2~8.4) of ANSI/BHMA A156.11 1999

ANSI standards

**Uses:** Wood or glass doors

**Body:** Zinc die cast

**Strap:** Steel

**Finish:** 26D

**Packaged:** Packed 10 per box

### KEYING INFORMATION:

**Cylinder:** Less cylinder

Accepts the following large format/full-size IC cylinders:

- > Schlage Quad, Numbered Section, and Schlage Classic IC cores
- > Schlage Primus® and Everest large format IC cores
- > Keymark large format IC Cores
- > Mul-T-Lock large format IC cores

**Compatible electronic cylinders:** VIDEX CyberLock LFIC cylinders

### INCLUDES:

729RS-1 strap for 3/16" to 1/4" material thicknesses

7788-PA-D plastic actuator to operate lock without core



For SCHLAGE  
full-size  
interchangeable  
core cylinders



929R


### FOR BYPASSING SLIDING DOORS

Item	Finish	Mat. Thickness	Type	Description
929R	26D	Up to 1/4"	Ratchet Lock	Less Cylinder - For Schlage full-size IC
Optional straps:		729RS-2 fits up to 3/8" material thickness 729RS-3 fits up to 5/8" material thickness (adjustable)		


### OPTIONAL STRAPS (SEE BELOW):

- > 729RS-2 strap for 3/8" material thickness
- > 729RS-3 strap for up to 5/8" material thickness

### OPTIONAL STRAPS

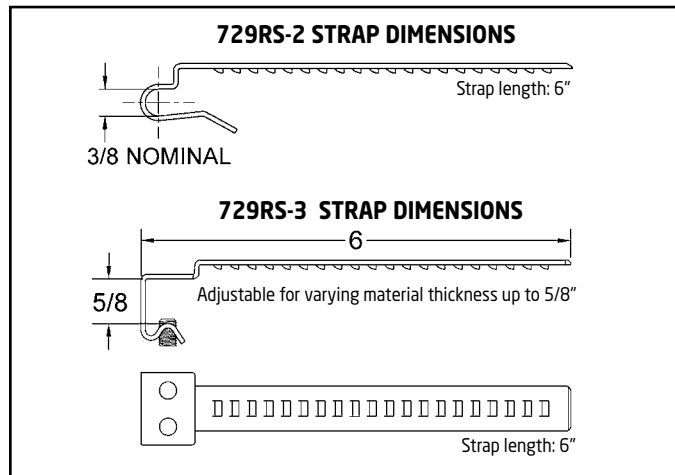

### DIMENSIONS

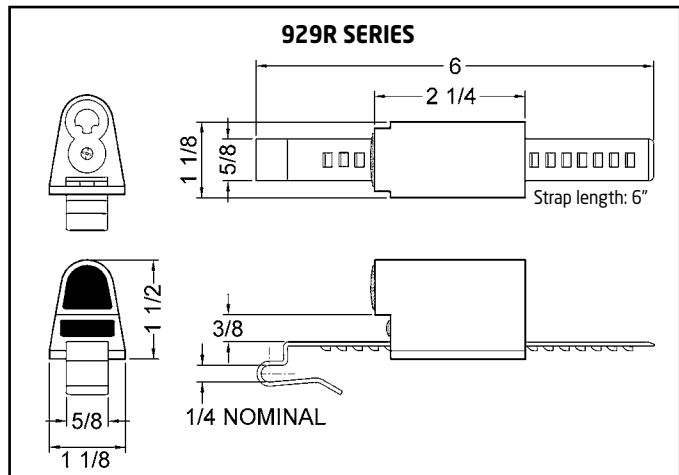

## L92 :: Latch Lock

### GENERAL FEATURES:

**Body:** Zinc die cast lock body

**Barrel diameter:** 1-1/8"

**Barrel length:** 1-7/16"

**Handing:** Drawer Vertical

**Finish:** 26D

**Packaged:** Packed 10 per box

### KEYING INFORMATION:

**Cylinder:** Less cylinder

Accepts the following large format/full-size IC cylinders:

- > Schlage Quad, Numbered Section, and Schlage Classic IC cores
- > Schlage Primus® and Everest large format IC cores
- > Keymark large format IC Cores
- > Mul-T-Lock large format IC cores

**Compatible electronic cylinders:** VIDEX  
CyberLock LFIC cylinders

### INCLUDES:

Matching lip strike


7788-PA-D plastic actuator to operate lock without core

**ACCESSORIES:** For a complete list, see the accessories section of this catalog.

- > 10-350 spacer (1/8" thickness)
- > 10-348 spacer (1/4" thickness)
- > 10-349 spacer (1/2" thickness)
- > TR78 trim ring
- > Reinforcing trim spacer ETS1, cabinet pull ETS1-PL and template ETST1 for through-bolt mount

Coming late 2012

**NEW!**




For SCHLAGE  
full-size  
interchangeable  
core cylinders




L92V

For door applications,  
place lock on side.




Left-Hand Door



Right-Hand Door

Item	Handing	Finish	Type	Keying
L92V	VH Drawer	26D	Latch	Less Cylinder - For Schlage full-size IC

### L92 SERIES

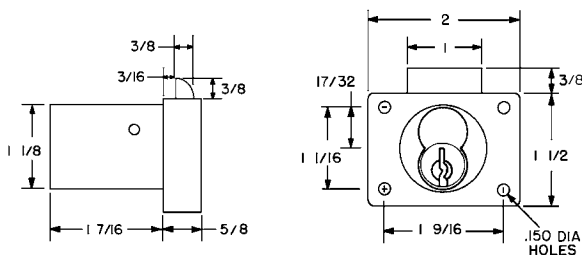

## CR1125 :: Rim Deadbolt

### GENERAL FEATURES:


**Mounting:** Rim (surface)  
**Function:** Deadbolt, door or drawer  
**ANSI/BHMA:** Passed ANSI/BHMA A156.11 Grade 1 performance requirements  
**Barrel length:** 1-1/8"  
**Barrel diameter:** 1-5/32"  
**Body:** Zinc die cast cylinder housing, steel back plate and steel case  
**Finish:** 26D  
**Packaged:** Packed 10 per box

### KEYING INFORMATION:

**Cores:** Not included.  
**Accepts:** Corbin/Russwin interchangeable cores cylinders

### INCLUDES:

1125-1 spacer to fit 6 or 7 pin cores  
 CR1125RD includes 725-SP-RD solid rectangular strike  
 725-PA plastic actuator to operate lock without core

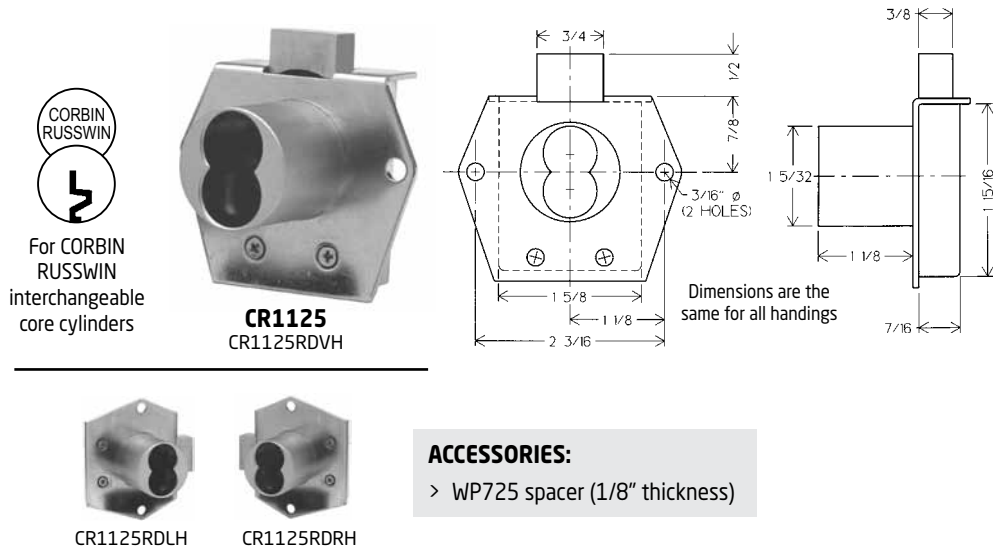

Part No.	Function	Finish	Barrel	Type	Description
CR1125RDRH	RH Door	26D	1-1/8"	Rim Deadbolt	Less Cylinder - For Corbin/Russwin IC
CR1125RDLH	LH Door	26D	1-1/8"	Rim Deadbolt	
CR1125RDVH	VH Drawer	26D	1-1/8"	Rim Deadbolt	

## CR1125 :: Rim Latch

### GENERAL FEATURES:


**Mounting:** Rim (surface)  
**Function:** Spring latch, drawer only  
**ANSI/BHMA:** Passed ANSI/BHMA A156.11 Grade 1 performance requirements  
**Barrel length:** 1-1/8"  
**Barrel diameter:** 1-5/32"  
**Body:** Zinc die cast cylinder housing, steel back plate and steel case  
**Finish:** 26D  
**Packaged:** Packed 10 per box

### KEYING INFORMATION:

**Cores:** Not included.  
**Accepts:** Corbin/Russwin interchangeable cores cylinders

### INCLUDES:

1125-1 spacer to fit 6 or 7 pin cores  
 CR1125RL includes 725-SP-RL solid lipped strike  
 725-PA plastic actuator to operate lock without core

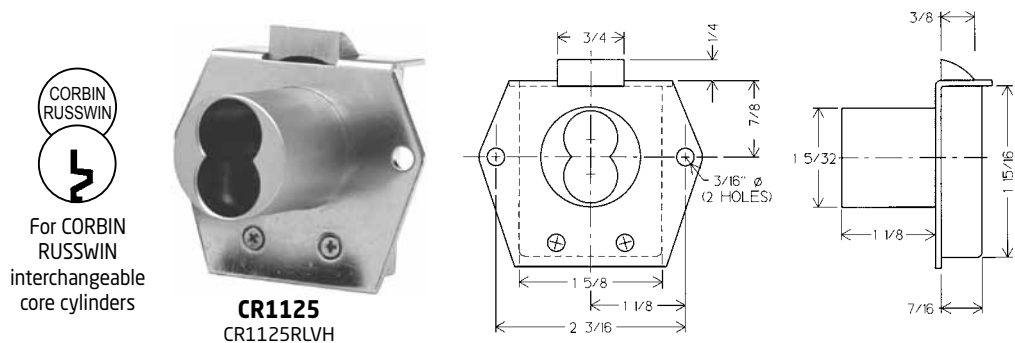

Part No.	Function	Finish	Barrel	Type	Description
CR1125RLVH	VH Drawer	26D	1-1/8"	Rim Latch	Less Cylinder - For Corbin/Russwin IC

### ACCESSORIES:

> WP725 spacer (1/8" thickness)



## CR25 :: Cam Lock

### GENERAL FEATURES:

**ANSI/BHMA:** Passed ANSI/BHMA A156.11 Grade 1 performance requirements

**Cylinder diameter:** 1-1/8"

**Across flats:** 7/8"

**Max. material thickness:** 1-1/8"

**Min. material thickness:** 0.08"

**Functions:** Includes parts for key-retaining or non-key-retaining function

**Body:** Zinc die cast lock body

**Finish:** 26D

**Packaged:** 10 per box

### KEYING INFORMATION:

**Cores:** Not included.

**Accepts:** Corbin/Russwin interchangeable cores cylinders

### INCLUDES:

Plastic actuator to operate lock without core

720-PL3 anti-rotation plate

720-3-1 short inverted cam

720-3-2 long vertical cam


720-CDLM lost motion cam shifter

720-CDDM key retaining door cam shifter


720-KR key retaining drawer cam shifter

**ACCESSORIES:** See pages 62-63 for a complete list of:

- > Optional cams
- > Trim collars/spacer rings
- > SW-1 switch accessory pack

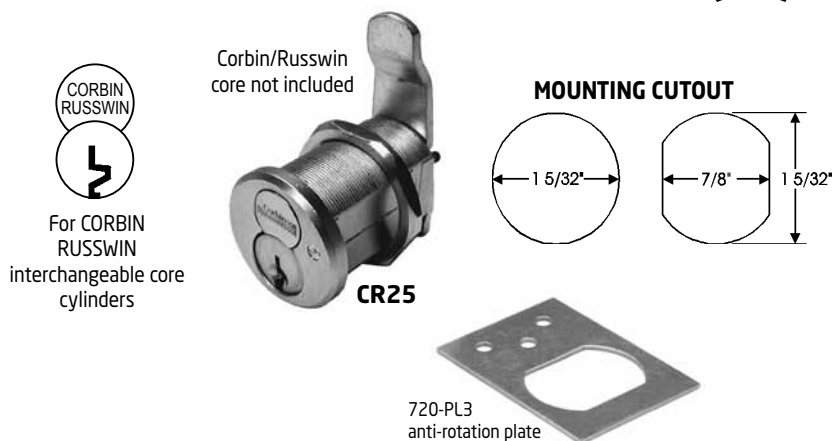

Item	Finish	Cyl. Diameter	Mat. Thickness	Type	Description
CR25LM/DM	26D	1-1/8"	Up to 1-1/8"	Cam Lock	Less Cylinder - For Corbin/Russwin IC

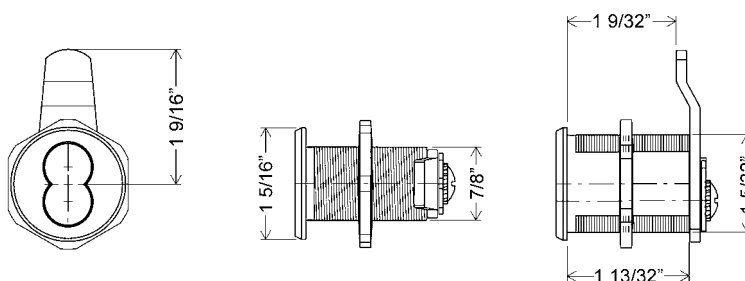

### SHIPS STANDARD WITH THE FOLLOWING CAMS

<b>720-3-1</b> for inverted function	<b>720-3-2</b> inbent cam for vertical function

## 931 :: Deadbolt Lock

### GENERAL FEATURES:

**ANSI/BHMA:** Passed ANSI/BHMA A156.11 Grade 1 performance requirements

**Barrel length:** 1-3/8"

**Barrel diameter:** 1-1/8"

**Body:** Zinc die cast lock body

**Finish:** 26D or US3

**Packaged:** Packed 10 per box

### KEYING INFORMATION:

**Cylinder:** Not included

**Medeco cylinder:** Accepts Medeco

#32-0201 (6-pin) IC core cylinder

**Yale cylinder:** Accepts Yale 1210 Series

(6-pin) IC core cylinder

**ASSA cylinder:** Accepts ASSA's 6-pin,

Yale-compatible large format IC core

cylinder

### INCLUDES:

931-1 spacer for 6-pin Medeco cores

10-350 plastic spacers (qty 3)

10-054 1/4" plastic bar strike


10-055 1/2" plastic bar strike

931-PA plastic actuator to operate lock

without core

**ACCESSORIES:** For a complete list, see the accessories section of this catalog.

- > 10-350 spacer (1/8" thickness)
- > 10-348 spacer (1/4" thickness)
- > 10-349 spacer (1/2" thickness)
- > 10-052, 12-2, 12-4 strikes
- > TR78 trim ring
- > Through-bolt plates ETS1, trim pull ETS1-PL and template ETST1 for through-bolt mount



For MEDECO/YALE style large format interchangeable core cylinders



**931DR**  
DOOR



**931DW**  
DRAWER

### KEY REMOVABLE LOCKED OR UNLOCKED POSITION



Item	Function	Finish	Cyl. Length	Type	Description
931DR	Door	26D, US3	1-3/8"	Deadbolt	Less Cylinder - For Medeco/Yale large format IC
931DW	Drawer	26D, US3	1-3/8"	Deadbolt	

### KEY RETAINING (KEY REMOVABLE LOCKED POSITION ONLY)

Item	Function	Finish	Cyl. Length	Type	Description
931DR-KR	Door-KR	26D, US3	1-3/8"	Deadbolt	Less Cylinder - For Medeco/Yale large format IC
931DW-KR	Drawer-KR	26D, US3	1-3/8"	Deadbolt	

**Key-Retaining:** Cycle to "locked" position before inserting core.

### KEY-RETAINING CHART

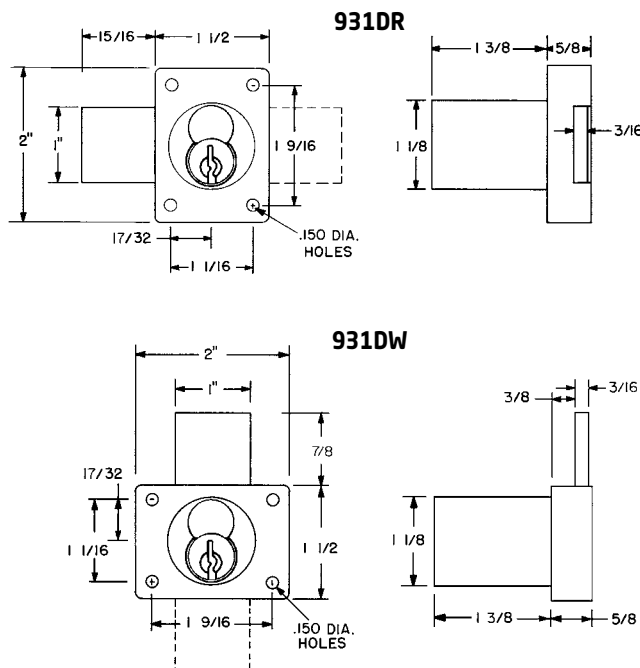

# BEST KEYWAY :: Utility Cam Lock

## B7 :: Cam Lock

### GENERAL FEATURES:

**Rekeyable:** Easily rekeyable via cylinder retainer clip

**ANSI/BHMA:** Passed ANSI/BHMA A156.11 Grade 1 performance requirements

**US Patent Nos:** 5,038,589; 5,737,950

**Body:** Zinc die cast lock body

**Cylinder:** Zinc die cast pin tumbler cylinder, drilled for 7 pins

**Functions:** Non-key retaining, key-retaining shifters are available separately

**Cams:** 2 reversible cams work in all positions

**Finish:** 26D

**Packaged:** Packed 10 per box

### KEYING INFORMATION:

**Keyways:** See available keyways chart below

**Stock keying:** O-Bit

**Keying:** Custom and/or masterkeying available. Specify at time of order.

### INCLUDES:

Trim collar and parts in chart below.

**ACCESSORIES:** See page 53 for a complete list of:

- > Optional cams and accessories for 3/4" cam locks




BEST Keyway  
(non-SFIC)



Locks in all eight positions with 2 reversible cams.

### MOUNTING CUTOUT




Item	Keyway	Finish	Cyl. Length*	Type	Keying
B7	See chart	26D	1-3/16"	Cam Lock	O-Bit Custom Keyed

\*Cyl. Length: As measured with straight cam.

### B7 SERIES AVAILABLE KEYWAYS

A Keyway	E Keyway	F Keyway	G Keyway
J Keyway	K Keyway	L Keyway	R Keyway

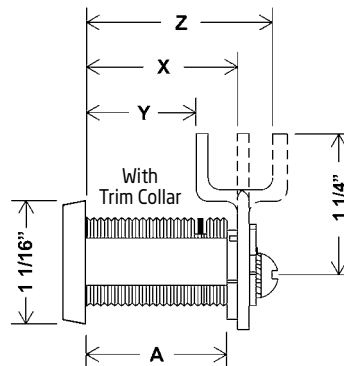

With Trim Collar	
For Mat. Thickness	7/8"
Straight Cam (X)	1-3/16"
Inbent Cam (Y)	7/8"
Outbent Cam (Z)	1-1/2"
Cylinder Length (A)	1-1/8"

### B7 SERIES CAM LOCKS SHIP STANDARD WITH THE FOLLOWING PARTS:

DCNP-200-OCD lost motion, non-key retaining cam shifter	DCNP-500-ARP anti-rotation plate	DCNP-100-SC straight cam	DCNP-100-BC offset reversible cam

### BELOW KEY-RETAINING SHIFTERS SOLD SEPARATELY

DCNP-200-KR key-retaining drawer cam shifter
DCNP-200-KDR key-retaining door cam shifter

## 206/207 & 725-PA :: SFIC Cores

### GENERAL FEATURES:

**206 Series:** 6 pin core

**207 Series:** 7 pin core

**725-PA:** Black plastic thumbturn

**Cores:** Equivalent to Best, Arrow, and Falcon SFIC cores

**Keyways:** See chart

**Keying:** KA/KD/MK or uncombined

**Finish:** 26D or US4

### FOR USE WITH:

720, 721, 722, 723, 724, 725, 728, 729 and 950 SFIC cabinet locks



BEST compatible interchangeable core cylinders



**206 OR 207  
SFIC CORE**



**725-PA**

### 206 AND 207 SERIES AVAILABLE KEYWAYS

<b>A</b> Keyway	<b>B</b> Keyway	<b>C</b> Keyway	<b>D</b> Keyway	<b>E</b> Keyway	<b>F</b> Keyway
<b>G</b> Keyway	<b>H</b> Keyway	<b>J</b> Keyway	<b>K</b> Keyway	<b>L</b> Keyway	<b>M</b> Keyway
<b>Q</b> Keyway	<b>1C</b> Keyway	<b>1D</b> Keyway	<b>KMT300</b> Keyway		

Item No.	Finish	Description
206-(x*)-(y*) 206-(x*)-(y*)-CUST	26D, US4	6 pin core, uncombined 6 pin core, KA, KD or MK
207-(x*)-(y*) 207-(x*)-(y*)-CUST	26D, US4	7 pin core, uncombined 7 pin core, KA, KD or MK
725-PA	Black Plastic	Plastic thumbturn/actuator Ships standard with all SFIC locks except 723

(x\*) = Keyway letter, (y\*) = Finish



### CONSTRUCTION CORES

We can match your blue, green or red painted Best construction cores.

Item No.	Color	Description
207-A-BL	BLUE	7 pin, keyed "Blue"
207-A-GR	GREEN	7 pin, keyed "Green"
207-A-RD	RED	7 pin, keyed "Red"

## 720 :: Cam Lock

### GENERAL FEATURES:

**Certifications:** Passed ANSI/BHMA A156.11 Grade 1 performance requirements

**Cylinder diameter:** 1-1/8"

**Across flats:** 7/8"

**Max. material thickness:** 1-1/8"

**Min. material thickness:** 0.08"

**Retrofits:** Best 1E7D4 or 1E7E4

**Functions:** Includes parts for key-retaining or non-key-retaining function

**Body:** Zinc die cast or machined brass lock body

**Finish:** 26D, US26 or US3

**Packaged:** Packed 10 per box

### KEYING INFORMATION:

**Cores:** Not included.

**Accepts:** Best, Arrow, Falcon, KSP, Schlage SFIC or equivalent small format interchangeable cores

**Compatible electronic cylinders:**

Medeco Nexgen XT or VIDEX CyberLock SFIC cylinders

### INCLUDES:

725-PA plastic actuator to operate lock without core

720-PL3 stabilizer plate

720-3-1 short inverted cam

720-3-2 long vertical cam

720-CDLM lost motion cam shifter


720-CDDM key retaining door cam shifter

720-KR key retaining drawer cam shifter


shifter

**ACCESSORIES:** See pages 62-63 for a complete list of:

- > Optional cams
- > Trim collars/spacer rings
- > SW-1 switch accessory pack
- > SFIC Cores (see page 38)

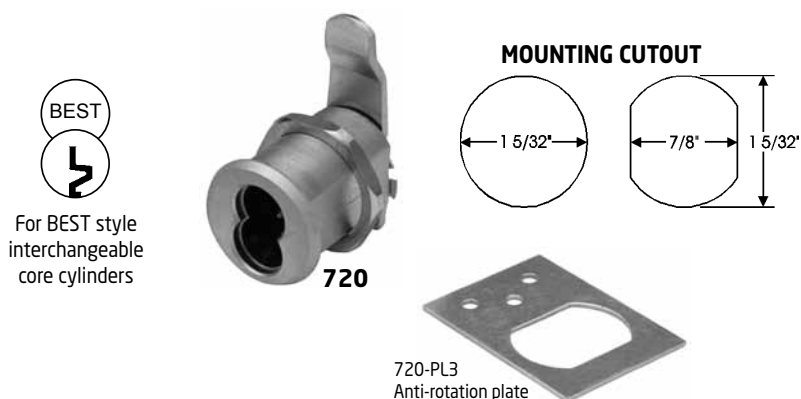

Item	Finish	Body	Cyl. Diameter	Mat. Thickness	Type	Description
720LM/DM	26D, US26, US3	Zinc die cast	1-1/8"	Up to 1-1/8"	Cam Lock	Less Cylinder - For small format IC
720B	26D	Machined solid brass	1-1/8"	Up to 1-1/8"	Cam Lock	

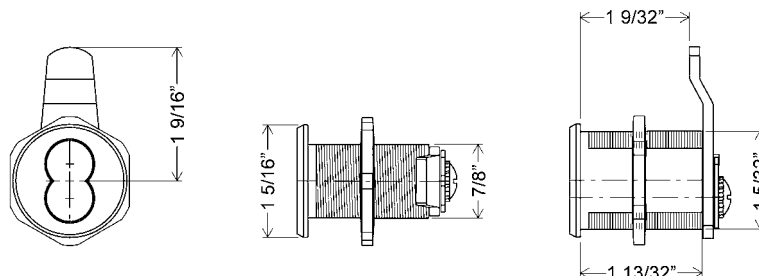

### SHIPS STANDARD WITH THE FOLLOWING CAMS

	May includes either 720-3-2 (mid-pin style) or 720-3-2 (bottom-pin style)	
<b>720-3-1</b> for inverted function	<b>720-3-2</b> inbent cam for vertical function (mid-pin style)	<b>720-3-2</b> inbent cam for vertical function (new bottom-pin style)





## 722 :: Plunger Lock

### GENERAL FEATURES:

**Barrel length:** 1-3/4"

**Bolt throw:** 1/2"

**Retrofits:** Best 2S, 2S-TBM

**Max. door thickness:** 1-7/8"

**Min. door thickness (TBM):** 5/8"

**Finish:** 26D or US26

**Body:** Zinc die cast lock body

**Packaged:** Packed 10 per box

### KEYING INFORMATION:

**Cores:** Not included.

**Accepts:** Best, Arrow, Falcon, KSP, Schlage SFIC or equivalent small format interchangeable cores

**Compatible electronic cylinders:**

Medeco Nexgen XT or VIDEX

CyberLock SFIC cylinders

### INCLUDES:

Matching strike

725-PA plastic actuator to operate lock without core

TBM locks include through-bolt plates and screws





722S



For BEST style interchangeable core cylinders



722S-TBM  
THROUGH-BOLT MOUNT

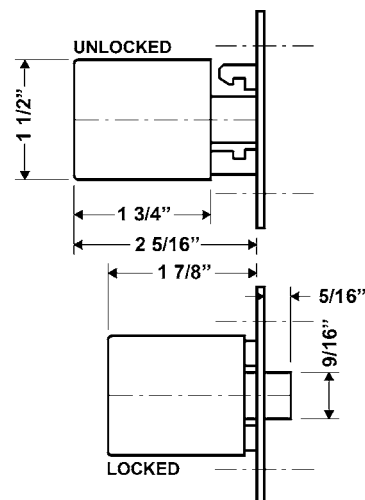

### ACCESSORIES:

> 206/207 Series SFIC cores (see page 38)

Item	Function	Finish	Type	Description
722S	Standard	26D, US26	Plunger Lock	Less Cylinder - For small format IC
722S-KR	Key-retaining	26D	Plunger Lock	
722S-TBM	Standard	26D, US26	Plunger Lock	Less Cylinder - For small format IC (with through-bolt mount)
722S-TBM-KR	Key-retaining	26D	Plunger Lock	

## 723 :: Sliding Door Cylinder Housing

### GENERAL FEATURES:

**Retrofits:** Best 4S

**U.S. Patent No:** 6,035,673

**Material:** Solid brass cylinder housing

**Finish:** 26D or US26

### KEYING INFORMATION:

**Cores:** Not included.

**Accepts:** Best, Arrow, Falcon, KSP, Schlage SFIC or equivalent small format interchangeable cores

**Compatible electronic cylinders:**

Medeco Nexgen XT or VIDEX CyberLock SFIC cylinders




For BEST style interchangeable core cylinders



723S

### FOR BYPASSING SLIDING GLASS DOORS

Item	Finish	Size	Type	Description
723	26D, US26	Adjustable	Sliding door cylinder housing	Less Cylinder - For small format IC

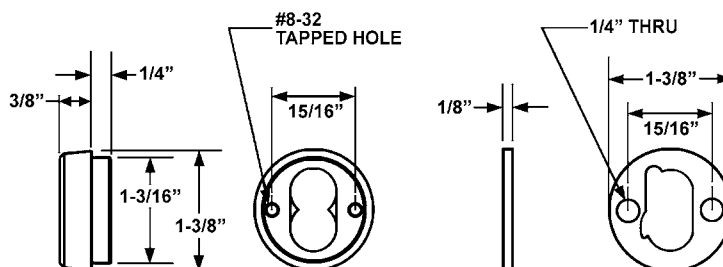

## 724VR :: File Cabinet/Medical Cart Lock




**NEW!**

### GENERAL FEATURES:

**Retrofits:** Best 2P73  
**Mounting slot:** Vertical  
**Bolt type:** Round spring bolt  
**Material:** Die cast housing  
**Includes:** 725-PA plastic actuator to operate lock without core  
**Finish:** 26D  
**Packaged:** Packed 10 per box

### KEYING INFORMATION:

**Cores:** Not included  
**Accepts:** Best, Arrow, Falcon, KSP, Schlage SFIC or equivalent small format interchangeable cores  
**Compatible electronic cylinders:** Medeco Nexgen XT or VIDEX CyberLock SFIC cylinders

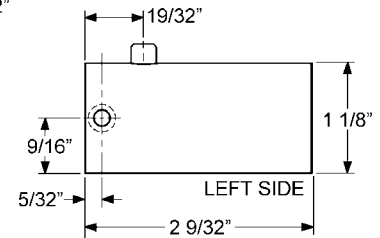

### ACCESSORIES:

> 206/207 Series SFIC cores (see page 38)

Item	Finish	Description
724VR	26D	Less Cylinder - For small format IC Vertical slot / round bolt
<b>Note:</b> Includes red "caution" flag when unlocked.		

## 725RSL :: Enclosure Lock (For NEMA Traffic Control Boxes)

### GENERAL FEATURES:


**Mounting:** Rim (surface)  
**Square latch (725RSL):** Available for VH, RH or LH functions  
**Retrofits:** Best 5L series cabinet lock (with option code "SL" square latch)  
**Certifications:** Passed ANSI/BHMA A156.11 Grade 1 performance requirements  
**Material:** Solid brass cylinder housing, steel back plate and steel case  
**Barrel length:** 1-1/16"  
**Barrel diameter:** 1-1/8"  
**Finish:** 26D or US4  
**Packaged:** Packed 10 per box

### KEYING INFORMATION:

**Cores:** Not included. We can match painted BEST cores (blue, red, green, white or orange).  
**Accepts:** Best, Arrow, Falcon, KSP, Schlage SFIC or equivalent small format interchangeable cores  
**Compatible electronic cylinders:** Medeco Nexgen XT or VIDEX CyberLock SFIC cylinders

### INCLUDES:

725-1 spacer to fit 6 or 7 pin cores  
 725-SP-RL solid lipped strike  
 725-PA plastic actuator to operate lock without core




**SPECIAL NOTE:** This is a spring loaded square bolt. For standard deadbolt function, see 725RD or 725MD Series locks.

**725RSL-VH**  
Square Spring Latch


### ENCLOSURE LOCK - SQUARE-STYLE, SPRING LATCH

Item	Function	Finish	Cyl. Length	Type	Description
725RSL-RH	RH Door	26D, US4	1-1/16"	Square Latch	Less Cylinder - For small format IC
725RSL-LH	LH Door	26D, US4	1-1/16"	Square Latch	
725RSL-VH	VH Drawer	26D, US4	1-1/16"	Square Latch	
<b>Note:</b> Solid brass cylinder housing available in 26D and US4 finishes only.					

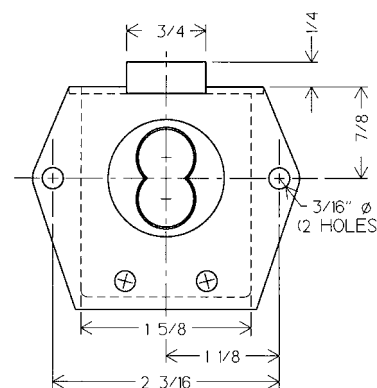

**725RSL**

Dimensions are the same for all handings.

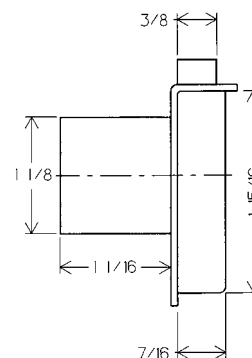

**725RSL (square latch)**

Dimensions for square-style spring latch configuration.

### ACCESSORIES:

> WP725 spacer (1/8" thickness)  
 > 206/207 Series SFIC cores (see page 38)

## 725RL :: Rim Latch

### GENERAL FEATURES:

**Mounting:** Rim (surface)

**Reverse latch:** Available for DW-VH or DW-IH functions - use reverse latch for in-swinging door applications.

**Retrofits:** Best 5L series cabinet lock

**ANSI/BHMA:** Passed ANSI/BHMA A156.11 Grade 1 performance requirements

**Material:** Zinc die cast cylinder housing, steel back plate and steel case

**Barrel diameter:** 1-1/8"

**Finish:** US26, 26D, US3 or US4

**Packaged:** Packed 10 per box

### KEYING INFORMATION:

**Cores:** Not included.

**Accepts:** Best, Arrow, Falcon, KSP, Schlage SFIC or equivalent small format interchangeable cores

**Compatible electronic cylinders:**

Medeco Nexgen XT or VIDEX CyberLock SFIC cylinders

### INCLUDES:

725-1 spacer to fit 6 or 7 pin cores

725-SP-RL solid lipped strike

725-PA plastic actuator to operate lock without core

### ACCESSORIES:

- > WP725 spacer (1/8" thickness)
- > 206/207 Series SFIC cores (see page 38)

### Surface Mounted



For BEST style interchangeable core cylinders



**725RL**  
725RL-DW-VH



725RL-DL-LH




725RL-DW-IH




725RL-DL-RH

Item	Function	Finish	Cyl. Length	Type	Description
725RL-DR-RH	RH Door	26D, US26, US3, US4	1-1/16"	Latch	Less Cylinder - For small format IC
725RL-DR-LH	LH Door	26D, US26, US3, US4	1-1/16"	Latch	
725RL-DW-VH	VH Drawer	26D, US26, US3, US4	1-1/16"	Latch	
725RL3DWVH	VH Drawer	26D	1-3/8"	Latch	
725RL-DW-IH	IH Drawer	26D, US26, US3, US4	1-1/16"	Latch	
Below locks are with Reverse Latch for "in-swinging" doors					
725RL-DWRVH	VH Drawer	26D, US26, US3, US4	1-1/16"	Latch	Less Cylinder - For small format IC
725RL3DWRVH	VH Drawer	26D	1-3/8"	Latch	
725RL-DWRIH	IH Drawer	26D, US26, US3, US4	1-1/16"	Latch	

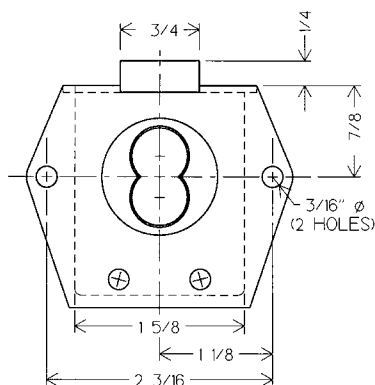


**725RL**

Dimensions are the same for all handings.

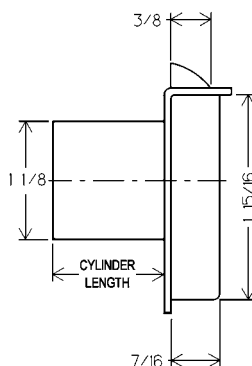

**725RL (spring latch)**  
Standard configuration

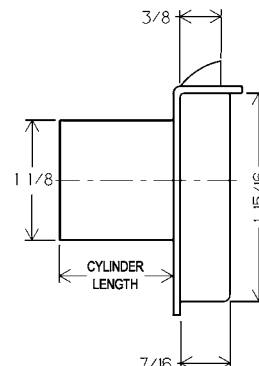

**725RL (reverse latch option)**  
For "in-swinging" doors

## 725RD :: Rim Deadbolt

### GENERAL FEATURES:

**Mounting:** Rim (surface)

**Key-retaining:** Available for DW-VH applications

**Retrofits:** Best 5L series cabinet lock

**ANSI/BHMA:** Passed ANSI/BHMA

A156.11 Grade 1 performance requirements

**Material:** Zinc die cast cylinder housing, steel back plate and steel case

**Barrel diameter:** 1-1/8"

**Finish:** US26, 26D, US3 or US4

**Packaged:** Packed 10 per box

### KEYING INFORMATION:

**Cores:** Not included.

**Accepts:** Best, Arrow, Falcon, KSP, Schlage SFIC or equivalent small format interchangeable cores

**Compatible electronic cylinders:**

Medeco Nexgen XT or VIDEX CyberLock SFIC cylinders

### INCLUDES:

725-1 spacer to fit 6 or 7 pin cores

725-SP-RD solid rectangular strike

725-PA plastic actuator to operate lock without core


### ACCESSORIES:

- > WP725 spacer (1/8" thickness)
- > 206/207 Series SFIC cores (see page 38)

### Surface Mounted



Item	Function	Finish	Cyl. Length	Type	Description
725RD-DR-RH	RH Door	26D, US26, US3, US4	1-1/16"	Deadbolt	Less Cylinder - For small format IC
725RD-DR-LH	LH Door	26D, US26, US3, US4	1-1/16"	Deadbolt	
725RD-DW-VH	VH Drawer	26D, US26, US3, US4	1-1/16"	Deadbolt	
725RD3DWVH	VH Drawer	26D	1-3/8"	Deadbolt	
725RD-DW-IH	IH Drawer	26D, US26, US3, US4	1-1/16"	Deadbolt	
Below locks are with "key-retaining" function (key removable in locked position only)					
725RD-DWKVH	VH Drawer	26D, US26, US3, US4	1-1/16"	Deadbolt	Less Cylinder - For small format IC
725RD3DWKVH	VH Drawer	26D	1-3/8"	Deadbolt	

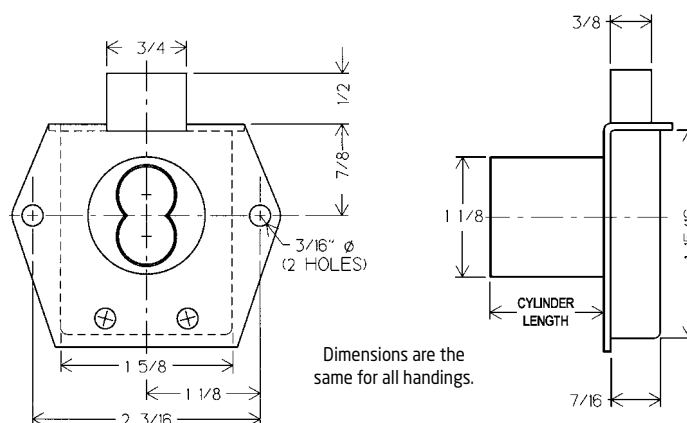



## 725MD :: Mortise Deadbolt

### GENERAL FEATURES:

**Mounting:** Mortise

**Key-retaining:** Available for DW-VH applications

**Retrofits:** Best 5L series cabinet lock

**ANSI/BHMA:** Passed ANSI/BHMA A156.11 Grade 1 performance requirements

**Material:** Zinc die cast cylinder housing, steel back plate and steel case

**Barrel length:** 1-1/16"

**Barrel diameter:** 1-1/8"

**Finish:** US26, 26D, US3 or US4

**Packaged:** Packed 10 per box

### KEYING INFORMATION:

**Cores:** Not included.

**Accepts:** Best, Arrow, Falcon, KSP, Schlage SFIC or equivalent small format interchangeable cores

**Compatible electronic cylinders:**

Medeco Nexgen XT or VIDEX CyberLock SFIC cylinders

### INCLUDES:

725-1 spacer to fit 6 or 7 pin cores

725-SP-MD solid rectangular strike

725-PA plastic actuator to operate lock without core

### ACCESSORIES:

> 206/207 Series SFIC cores (see page 38)

### Mortise Mounted



**725MD**  
725MD-DR-RH



725MD-DW-VH




725MD-DR-LH



725MD-DW-IH

Item	Function	Finish	Cyl. Length	Type	Description
725MD-DR-RH	RH Door	26D, US26, US3, US4	1-1/16"	Deadbolt	Less Cylinder - For small format IC
725MD-DR-LH	LH Door	26D, US26, US3, US4	1-1/16"	Deadbolt	
725MD-DW-VH	VH Drawer	26D, US26, US3, US4	1-1/16"	Deadbolt	
725MD-DW-IH	IH Drawer	26D, US26, US3, US4	1-1/16"	Deadbolt	
Below locks are with "key-retaining" function (key removable in locked position only)					
725MD-DWKVH	VH Drawer	26D, US26, US3, US4	1-1/16"	Deadbolt	Less Cylinder - For small format IC

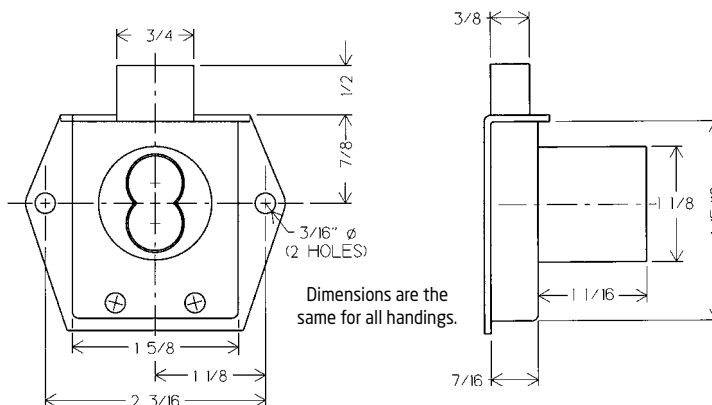

## 725ML :: Mortise Latch

### GENERAL FEATURES:

**Mounting:** Mortise

**Reverse latch:** Available for DW-VH or DW-IH functions (use reverse latch for in-swinging door applications)

**Retrofits:** Best 5L series cabinet lock

**ANSI/BHMA:** Passed ANSI/BHMA

A156.11 Grade 1 performance requirements

**Material:** Zinc die cast cylinder housing, steel back plate and steel case

**Barrel length:** 1-1/16"

**Barrel diameter:** 1-1/8"

**Finish:** US26, 26D, US3 or US4

**Packaged:** Packed 10 per box

### KEYING INFORMATION:

**Cores:** Not included.

**Accepts:** Best, Arrow, Falcon, KSP, Schlage SFIC or equivalent small format interchangeable cores

**Compatible electronic cylinders:**

Medeco Nexgen XT or VIDEX CyberLock SFIC cylinders

### INCLUDES:

725-1 spacer to fit 6 or 7 pin cores

725-SP-ML solid lipped strike

725-PA plastic actuator to operate lock without core

### ACCESSORIES:

- > 206/207 Series SFIC cores (see page 38)

### Mortise Mounted



**725ML**  
725ML-DW-IH



725ML-DR-LH




725ML-DR-RH




725ML-DW-VH

Item	Function	Finish	Cyl. Length	Type	Description
725ML-DR-RH	RH Door	26D, US26, US3, US4	1-1/16"	Latch	Less Cylinder - For small format IC
725ML-DR-LH	LH Door	26D, US26, US3, US4	1-1/16"	Latch	
725ML-DW-VH	VH Drawer	26D, US26, US3, US4	1-1/16"	Latch	
725ML-DW-IH	IH Drawer	26D, US26, US3, US4	1-1/16"	Latch	
Below locks are with Reverse Latch for "in-swinging" doors					
725ML-DWRVH	VH Drawer	26D, US26, US3, US4	1-1/16"	Latch	Less Cylinder - For small format IC
725ML-DWRIH	IH Drawer	26D, US26, US3, US4	1-1/16"	Latch	

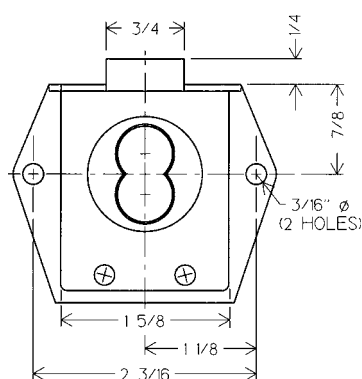


**725ML**

Dimensions are the same for all handings.

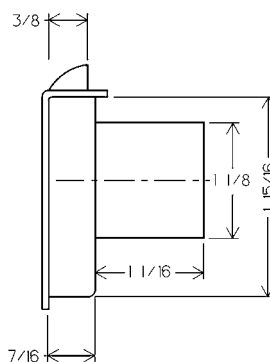

**725ML (spring latch)**  
Standard configuration

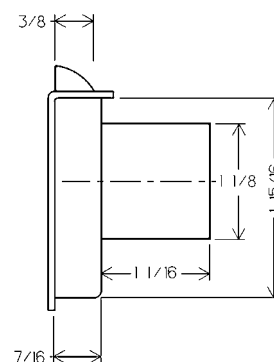

**725ML (reverse latch option)**  
For "in-swinging" doors

## 728MBL :: Mail Box Lock

### GENERAL FEATURES:

**Handing:** RH standard  
**Retrofits:** Best 8L  
**Installation:** Fits most common metal mail box door designs  
**Material:** Zinc die cast cylinder housing, steel body  
**Barrel length:** Adjustable  
**Finish:** 26D  
**Packaged:** Packed 10 per box

### INCLUDES:

725-PA plastic actuator to operate lock without core

### KEYING INFORMATION:


**Cores:** Not included.  
**Accepts:** Best, Arrow, Falcon, KSP, Schlage SFIC or equivalent small format interchangeable cores  
**Compatible electronic cylinders:** Medeco Nexgen XT or VIDEX CyberLock SFIC cylinders



For BEST style interchangeable core cylinders



728MBL

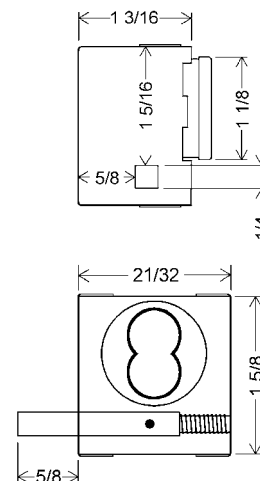

### ACCESSORIES:

> 206/207 Series SFIC cores (see page 38)

Item	Finish	Size	Type	Description
728MBL	26D	Adjustable	Mail Box Lock	Less Cylinder - For small format IC

## 729R :: Showcase/Ratchet Lock

### GENERAL FEATURES:

**Retrofits:** Best 3S Series  
**ANSI/BHMA:** Complies with clause 6.3 (8.2~8.4) of ANSI/BHMA A156.11 1999 ANSI standards  
**Uses:** Wood or glass doors  
**Body:** Zinc die cast  
**Strap:** Steel  
**Finish:** 26D  
**Packaged:** Packed 10 per box

### INCLUDES:

729RS-1 strap for 3/16" to 1/4" material thicknesses  
 725-PA plastic actuator to operate lock without core

### ACCESSORIES:

> 729RS-2 strap for 3/8" material thickness (see below)  
 > 729RS-3 strap for up to 5/8" material thickness (see below)  
 > 206/207 Series SFIC cores (see page 38)



For BEST style interchangeable core cylinders




729R


### FOR BYPASSING SLIDING DOORS

Item	Finish	Mat. Thickness	Type	Description
729R	26D	Up to 1/4"	Ratchet Lock	Less Cylinder - For small format IC
Optional straps:		729RS-2 fits up to 3/8" material thickness 729RS-3 fits up to 5/8" material thickness (adjustable)		

### OPTIONAL STRAPS

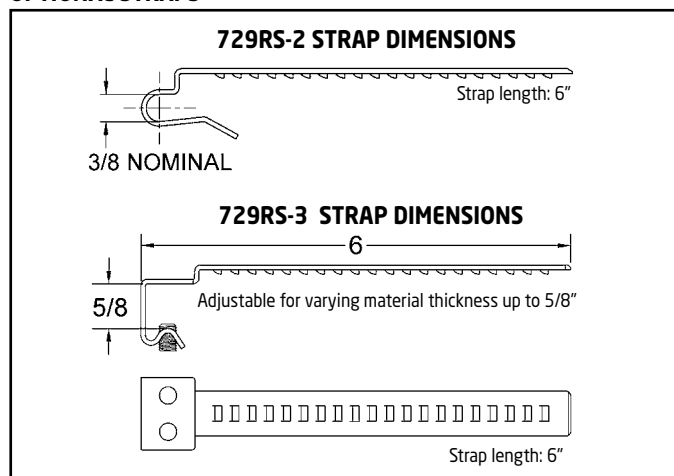

### DIMENSIONS

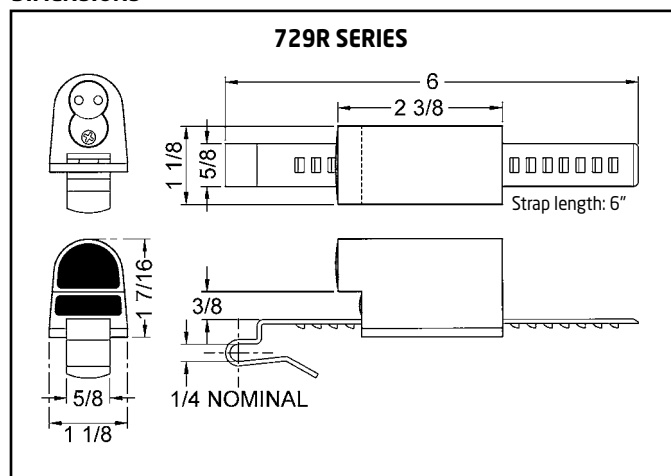

## 950 :: Deadlatching Lock

### GENERAL FEATURES:

**U.S. Patent No:** 4,899,563;  
4,922,774; 5,657,652  
**Body:** Zinc die cast lock body  
**Barrel length:** 1-1/8"  
**Barrel diameter:** 1-1/8"  
**Finish:** 26D or US3  
**Packaged:** Packed 10 per box

### INCLUDES:

10-350 plastic spacers (qty 2)  
725-1 spacer to fit 6 or 7 pin cores  
850-210 matching strike  
725-PA plastic actuator to  
functionally test lock without core

### KEYING INFORMATION:

**Cores:** Not included.  
**Accepts:** Best, Arrow, Falcon, KSP,  
Schlage SFIC or equivalent small  
format interchangeable cores  
**Compatible electronic cylinders:**  
Medeco Nexgen XT or VIDEX  
CyberLock SFIC cylinders



For BEST style  
interchangeable  
core cylinders





950

Item	Function	Finish	Cyl. length	Type	Description
950IC	VH Drawer	26D	1-1/8"	Deadlatch	Less Cylinder - For small format IC

**ACCESSORIES:** For a complete list, see the  
accessories section of this catalog.

- > 10-350 spacer (1/8" thickness)
- > 10-348 spacer (1/4" thickness)
- > 10-349 spacer (1/2" thickness)
- > 10-352 slotted strikes
- > TR78 trim ring
- > Through-bolt plate ETS1, cabinet pull  
ETS1-PL and template ETST1 for  
through-bolt mount
- > 206/207 Series SFIC cores (see page 38)



## SK-002 :: Product Sample & Service Kit



### GENERAL FEATURES:

This kit contains a broad sampling of our best selling Olympus cabinet locks and accessories. The kit comes with its own plastic, 2-level case with each product carefully marked and separated by dividers.



**TOP LAYER**  
Parts and accessories



**BOTTOM LAYER**  
Cabinet lock products

# PIN KITS :: For Small Pin Locks

## N1 / R1 :: Pin Kits



Made in USA

### N1 Kit :: For N Series Locks

**FOR USE WITH THE FOLLOWING OLYMPUS LOCKS:**

100, 200, 300, 329, 998, 999, FC10, N078, T37, T54C, DCN1,2,3,4

**N1 PIN KIT FEATURES:**

**Keyway:** National D4291/D4292 Keyway

**Pins:** Color coded, .101 diameter brass pins

**EACH KIT INCLUDES:**

100 each: Drivers 1 through 4

100 each: Master drivers 2 through 9

100 each: Tumblers 0 through 9

100 each: Tumbler springs

10 each: Set screws

1 each: Plug follower

Item	Description	Qty/pkg.
OC3730	Driver #1	100
OC3731	Driver #2	100
OC3732	Driver #3	100
OC3733	Driver #4	100
OC3740	Master driver #2	100
OC3741	Master driver #3	100
OC3742	Master driver #4	100
OC3743	Master driver #5	100
OC3744	Master driver #6	100
OC3745	Master driver #7	100
OC3746	Master driver #8	100
OC3747	Master driver #9	100
OC3750	Tumbler #0	100
OC3751	Tumbler #1	100
OC3752	Tumbler #2	100
OC3753	Tumbler #3	100
OC3754	Tumbler #4	100
OC3755	Tumbler #5	100
OC3756	Tumbler #6	100
OC3757	Tumbler #7	100
OC3758	Tumbler #8	100
OC3759	Tumbler #9	100
OC3737	Tumbler springs	100
S100	Set screws	100
FL1	Plug follower	1 ea.

Additional pins available (100 pcs. per pkg.)

Specify item number above when ordering replacement pins.

### R1 Kit :: For R Series Locks

**FOR USE WITH THE FOLLOWING OLYMPUS LOCKS:**

500, 600, 400, 429, 996, 997, R078, DCR1,2,3,4

**N1 PIN KIT FEATURES:**

**Keyway:** CCL R1 Keyway

**Pins:** Color coded, .095 diameter brass pins, Olympus B4R ball end bottom pins, type B4R & 4R master pins

**EACH KIT INCLUDES:**

100 each: Master pins 2 through 9

100 each: Bottom pins 0 through 9

100 each: Drivers 0 and 5

100 each: Tumbler springs

10 each: Set screws

1 each: Plug follower

Item	Description	Qty/pkg.
X025	Master pin #2	100
X038	Master pin #3	100
X050	Master pin #4	100
X063	Master pin #5	100
X075	Master pin #6	100
X088	Master pin #7	100
X100	Master pin #8	100
X113	Master pin #9	100
W111	Bottom pin #0	100
W123	Bottom pin #1	100
W136	Bottom pin #2	100
W148	Bottom pin #3	100
W161	Bottom pin #4	100
W173	Bottom pin #5	100
W186	Bottom pin #6	100
W198	Bottom pin #7	100
W210	Bottom pin #8	100
W223	Bottom pin #9	100
X155	Driver #0	100
X088	Driver #5	100
OC3737	Tumbler springs	100
S100	Set screws	100
FL1	Plug follower	1 ea.

Additional pins available (100 pcs. per pkg.)

Specify item number above when ordering replacement pins.



# HANDLES :: 2000 Series

## 2000 :: Handle Series

### GENERAL FEATURES:

- > Cabinet pull and lock all in one unit
- > For use in ADA (American Disabilities Act) applications when used with optional wire pull
- > Fits door (LH or RH) and drawer applications
- > Available in US3 or 26D finish
- > Accepts small or large pin Olympus cabinet locks
- > Locks available keyed alike, keyed different or custom keyed to your specifications
- > Easy to install - just cut a notch out of the door or drawer, insert unit, and use screws to tighten in place
- > Matching dummy handles for non-locking doors and drawers

### 2000SP SERIES:

#### Locking handles accept:

Olympus 7/8" diameter deadbolt cabinet lock series: 100, 200, 500 or 600.

Olympus 3/4" cam lock series: DCN, DCR, B7 (requires use of cam lock adapter 2000MED-DR for doors or 2000MED-DW for drawers).

### 2000LP SERIES:

**Locking handles accept:** Large pin, 1-1/8" diameter Olympus cabinet lock series 700, 721, 754, 777, 800, 854, 888 or 931

### ARCHITECTURAL SPECIFICATION:

2000SP Series - door/drawer for small pin cabinet locks

2000LP Series - door/drawer for large pin cabinet locks

All cabinets shall use Olympus Lock 2000 series handles. Non-locking cabinets to use 2000 dummy handles. Handles to incorporate lock within handle body and to utilize through-bolt mounting for added security. The door and drawer locks used with handle shall be easily rekeyable such as provided by Olympus Lock, Inc. Locks to have passed ANSI Grade 1 cycle testing.

**Note:** Place specific cabinet lock specification here. See cabinet lock specifications in this catalog.

### ADDA

**3-3/4" or 4" optional oval wire pull is required for ADA compliance and is mounted per below. For use with small or large pin handles.**


Pull can be used in door or drawer configuration.



Item No.	Finish	Type	Description
102-015-96SC	26D	Wire pull	3 3/4" satin chrome pull
102-015-96	US3	Wire pull	3 3/4" polished brass pull
102-015-4SC	26D	Wire pull	4" satin chrome pull
102-015-4	US3	Wire pull	4" polished brass




ADA

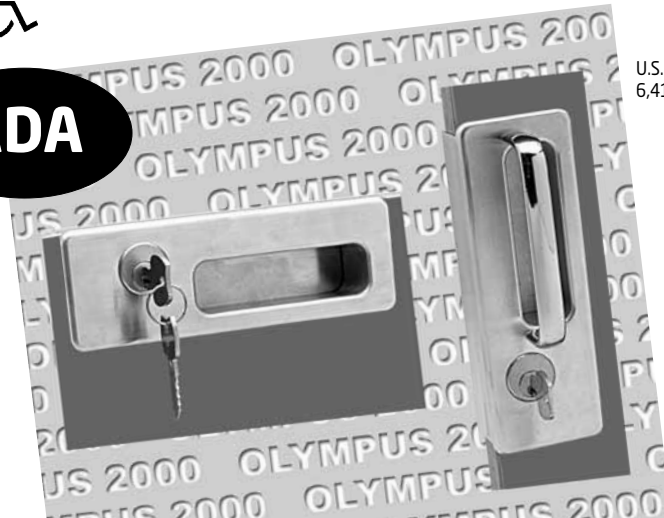

U.S. Patent No. 6,412,317 B1

"I applaud your research toward a beneficial solution to all users, including people with disabilities," and for "creating a system that would not only meet the required code and ADA standards, but would truly work the best for the widest range of users."

— Barbara L. Allan, Director Access/Abilities Program, Easter Seals



Left-hand handle with optional wire pull



Right-hand handle with optional wire pull

Compatible for use in ADA (American Disabilities Act) applications when used with optional wire pull




Left-hand handle used in drawer application



Right-hand handle used in drawer application

### DIMENSIONS

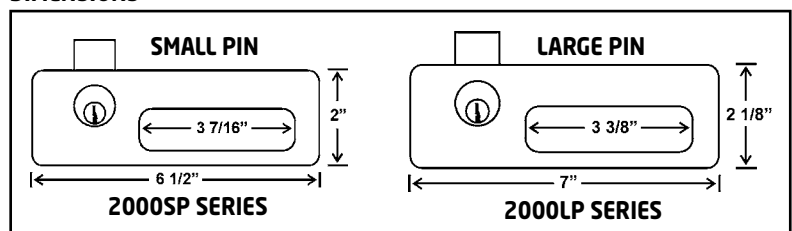




## 2000 :: Handle Configuration



### 2001 Series :: Overlay Construction


For door or drawer applications

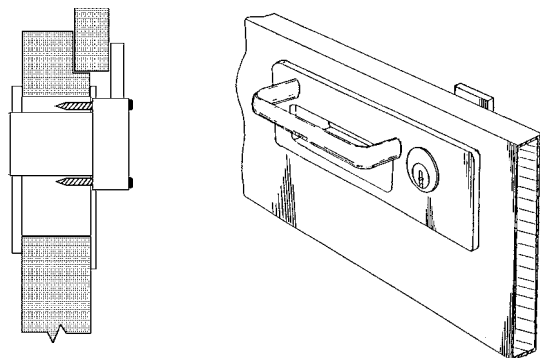

Item	Handing	Type	Finish	Fits Material
2001SP-RH 2001SP-LH	RH Door or Drawer LH Door or Drawer	Small Pin Locking	26D, US3	3/4" to 1"
2001SPD-RH 2001SPD-LH	RH Door or Drawer LH Door or Drawer	Small pin Dummy	26D, US3	3/4" to 1"
2001LP-RH 2001LP-LH	RH Door or Drawer LH Door or Drawer	Large pin Locking	26D, US3	3/4" to 1"
2001LPD-RH 2001LPD-LH	RH Door or Drawer LH Door or Drawer	Large pin Dummy	26D, US3	3/4" to 1"

### 2002 Series :: Flush Construction


For door or drawer applications

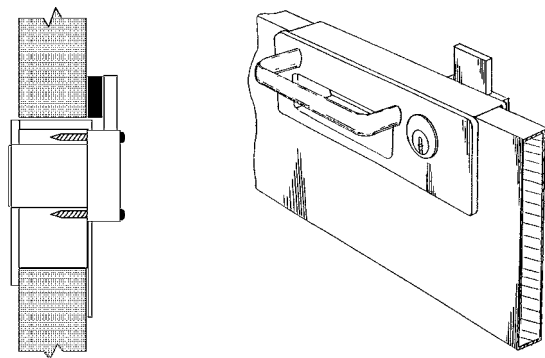

Item	Handing	Type	Finish	Fits Material
2002SP-RH 2002SP-LH	RH Door or Drawer LH Door or Drawer	Small Pin Locking	26D, US3	3/4" to 7/8"
2002SPD-RH 2002SPD-LH	RH Door or Drawer LH Door or Drawer	Small pin Dummy	26D, US3	3/4" to 7/8"
2002LP-RH 2002LP-LH	RH Door or Drawer LH Door or Drawer	Large pin Locking	26D, US3	3/4" to 7/8"
2002LPD-RH 2002LPD-LH	RH Door or Drawer LH Door or Drawer	Large pin Dummy	26D, US3	3/4" to 7/8"

### 2003/2004 Series :: Drawer Liner Construction

For door or drawer applications

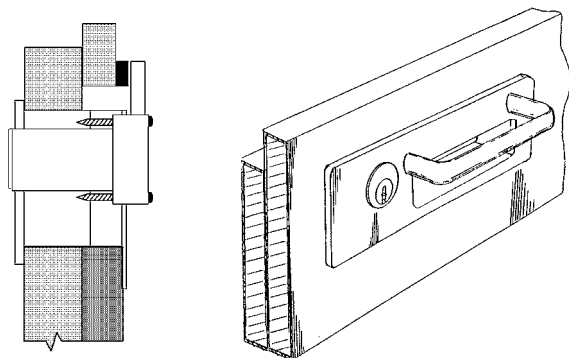

Item	Handing	Type	Finish	Fits Material
2003SP-RH	RH Door or Drawer	Small Pin Locking	26D, US3	1-1/2"
2003SPD-RH	RH Door or Drawer	Small pin Dummy	26D, US3	1-1/2"
2004SP-RH	RH Door or Drawer	Small Pin Locking	26D, US3	1-1/4" to 1-3/8"
2004SPD-RH	RH Door or Drawer	Small pin Dummy	26D, US3	1-1/4" to 1-3/8"
2003LP-RH	RH Door or Drawer	Large pin Locking	26D, US3	1-3/8"
2003LPD-RH	RH Door or Drawer	Large pin Dummy	26D, US3	1-3/8"



#### Special note:

All above handles are compatible for use in ADA (American Disabilities Act) applications when used with optional oval wire pull. Oval pull sold separately.

## FDB Series :: Display Boards

This valuable resource demonstrates the variety of pin-tumbler cabinet locks available from Olympus Lock. Each lock is mounted so it can be functionally tested. Boards are made of particle board/plastic laminate and are free-standing for countertop display. Specific finishes or locks may be requested at time of order.

<p><b>FDB-001</b></p> 	<p><b>FDB-002</b></p> 
<p><b>PRODUCT LINE OVERVIEW</b> Includes a sampling of each product family: large pin, small pin, interchangeable core, padlockable cam locks.</p>	<p><b>SMALL PIN LOCKS</b> Includes a sampling of our small pin N Series and/or R Series locks.</p>
<p><b>FDB-003</b></p> 	<p><b>FDB-004</b></p> 
<p><b>SCHLAGE FULL-SIZE IC OR LARGE PIN LOCKS</b> Includes a sampling of our large pin and/or Schlage full-size interchangeable core locks</p>	<p><b>SMALL FORMAT IC LOCKS</b> Includes a sampling of our small format interchangeable core locks</p>

## CL-HIT-25 :: Cabinet Lock Drill Guide

### GENERAL FEATURES:

**Rubber lined jaws:** Protect cabinet doors and give greater holding power.


**Adjustable stop:** For repeat installations on the same cabinet door.

**Maximum thickness:** Works on doors up to 1-1/2" thick.

**Hole location:** Locate the cylinder hole up to 2-5/8" from the edge of the door.

**Five sizes of drill bushings for versatility:** 3/4", 7/8", 1", 1-1/8" and 1-1/4".

These bushings are designed to be used with clean cutting Forstner-type drill bits and are not compatible with hole saws, paddle, or spade-type bits.

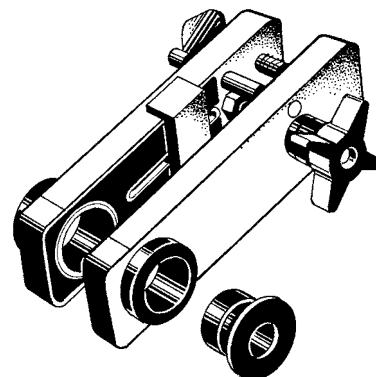

# ACCESSORIES :: For 3/4" Cam Locks

## DCN/DCR/B7 :: Optional Cam Lock Accessories

The below accessories can be used on our 3/4" cam lock series DCN, DCR or B7. See the applicable product page for accessories that ship standard with each product.

<b>DCNP-100-BC5</b> 1/2" offset cam	<b>DCNP-100-LBC</b> long offset cam	<b>DCNP-100-HC1</b> offset hook cam	<b>DCNP-100-LC</b> long 3" straight cam

<b>DCNP-100-SC2</b> heavy duty straight cam	<b>DCNP-100-HD</b> heavy duty offset cam	<b>DCNP-100-HD2</b> heavy duty long offset cam	<b>DCNP-100-WB</b> short cam

**FINGER PULL - FOR USE WITH 3/4" CAM LOCKS**  
Eliminates need for additional cabinet pull. Mounts between front of cam lock and cabinet face.

**DCNP-300-FP**  
Finger pull for cam locks, stainless steel finish

**T37-NKIT - Number Plate Kit**  
For use with B7 or T37 only

**T37DC-NP - Number Plate**  
For use with DCN, DCR, B7, T37

**DCNP-SPW**  
pronged wood washer

**DCNP-GW**  
self-adhesive glass washer  
for mounting lock on glass  
(clear plastic material)

# ACCESSORIES :: Keys & Trim Rings

## KEYS :: Cut Keys & Keyblanks


### N SERIES :: Keyblanks & Cut Keys

#### KEY BLANKS

KBN-4-NP National D4291 keyway - 4 pin blank  
Equivalent to NA14, 1069L  
KBN-5-NP National D4292 keyway - 5 pin blank  
Equivalent to NA12, 1069LA

#### CUT KEYS

KB-101-NP Cut key for KA #101  
KB-103-NP Cut key for KA #103  
KB-107-NP Cut key for KA #107  
KB-915-NP Cut key for KA #915  
KBN-4-CUST Custom cut 4-pin key  
KBN-5-CUST Custom cut 5-pin key  
KB-GM1MK-NP Cut master key for GM1  
(4-pin) master key system  
KB-GM2MK-NP Cut master key for GM2  
(5-pin) master key system  
KB-GM3MK-NP Cut master key for GM300  
(5-pin) master key system




### R SERIES :: Keyblanks & Cut Keys

#### KEY BLANKS

KBR-5-NP CCL R1 keyway - 5 pin blank  
Equivalent to C0106, 1003A  
KBR-6-NP CCL R1 keyway - 6 pin blank  
Equivalent to L1003A

#### CUT KEYS

KB-4T2-NP Cut key for KA #4T21579  
KB-4T3-NP Cut key for KA #4T37526  
KBR-5-CUST Custom cut 5-pin key  
KBR-6-CUST Custom cut 6-pin key  
KB-R1MK-NP Cut master key for R1  
master key system




### SCHLAGE C :: Keyblanks & Cut Keys

#### KEY BLANKS

KBSC-5-NP Schlage C keyway - 5 pin blank  
KBSC-6-NP Schlage C keyway - 6 pin blank

#### CUT KEYS

KB-700-101 Cut key for KA#101  
KB-700-102 Cut key for KA#102  
KB-700-CUST Custom cut key for Schlage C  
keyway  
KB-700MK Cut master key for Schlage C  
master key system



### SFIC CORES & B7 SERIES CAM LOCK ::

#### Keyblanks & Cut Keys


#### 206/207 BEST KEYWAY KEY BLANKS

KB-400K(x\*) Keyblank for 6 or 7 pin core



#### 206/207 BEST KEYWAY CUT KEYS

KB-400K(x\*)-CUST Cut key for 6 or 7 pin core

x\* = Specify keyway: A,B,C,D,E,F,G,H,I,J,K,L,M,Q,1C,  
1D,KMT300



## TR1256/78 :: Trim Rings


FOR 7/8" DIAMETER LOCKS	For 1-1/8" Diameter Locks
	
<b>TR1256</b> <b>Fits:</b> 7/8" diameter cabinet locks <b>Finish:</b> 26D, US3 or 10B <b>Use with:</b> 100, 200, N078, 999, 998, 500, 600, R078, 997, 996	<b>TR78</b> <b>Fits:</b> 1-1/8" diameter cabinet locks <b>Finish:</b> 26D, US3 or 10B <b>Use with:</b> 700, 800, 850, 950, 721, 725, 754, 854, 777, 888, 931, L78, L92

# ACCESSORIES :: Internal Spacers

## SPACERS :: Internal for 7/8" diameter locks


### WP21

**Thickness:** 3/32" thick shim for flush mounting face of lock with face of cabinet. **Use with:** 100, 200, 500, 600, N078, R078

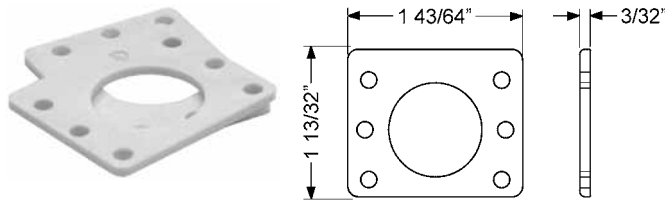


### WP22

**Thickness:** 1/4" thick shim for flush mounting face of lock with face of cabinet. **Use with:** 100, 200, 500, 600, N078, R078

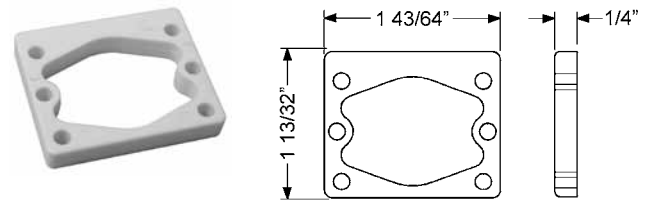


### WP23

**Thickness:** 1/2" thick shim for flush mounting face of lock with face of cabinet. **Use with:** 100, 200, 500, 600, N078, R078

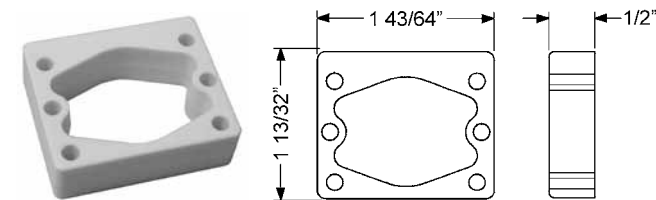

### WP24


**Thickness:** 1/8" thick shim for flush mounting face of lock with face of cabinet. **Use with:** 996, 997, 998, 999

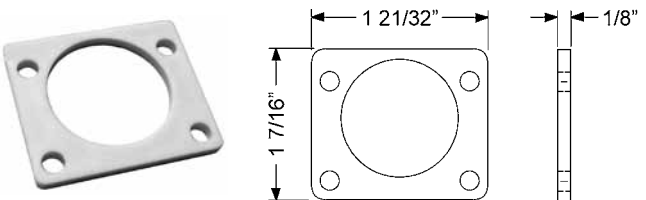

## SPACERS :: Internal for 1-1/8" diameter locks


### 10-348

**Thickness:** 1/4" thick shim for flush mounting face of lock with face of cabinet. **Use with:** 700, 721, 754, 777, 800, 850, 854, 888, 931, 950, L92

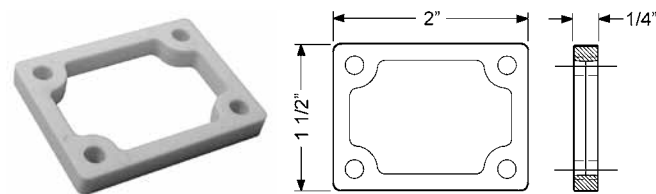


### 10-349

**Thickness:** 1/2" thick shim for flush mounting face of lock with face of cabinet. **Use with:** 700, 721, 754, 777, 800, 850, 854, 888, 931, 950, L92

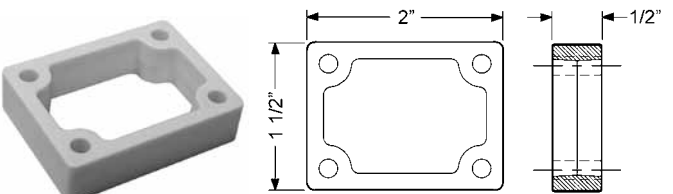


### 10-350

**Thickness:** 1/8" thick shim for flush mounting face of lock with face of cabinet. **Use with:** 700, 721, 754, 777, 800, 850, 854, 888, 931, 950, L92

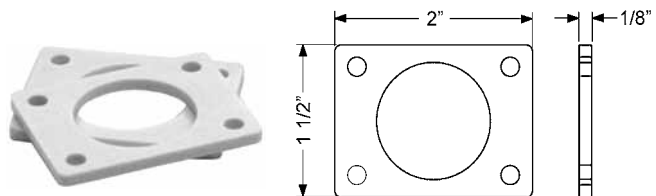


### 10-351

**Thickness:** 1/8" thick shim for flush mounting face of lock with face of cabinet. **Use with:** L78

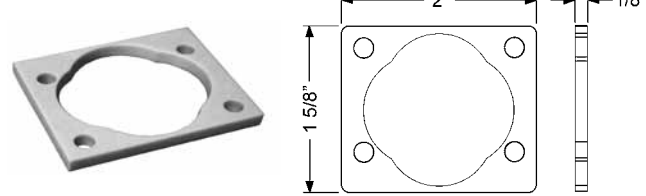

### WP725

**Thickness:** 1/8" thick shim for flush mounting face of lock with face of cabinet. **Use with:** 725RD, 725RL, CR1125

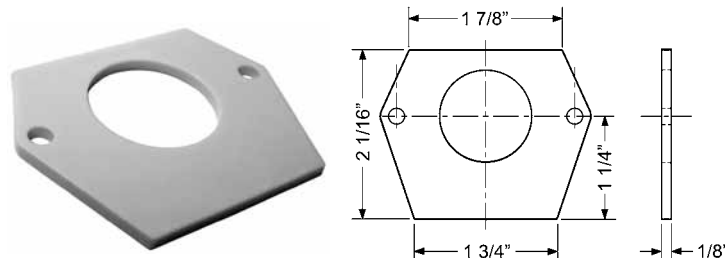

## ETS Series :: Through-bolt mounting plates and templates

### ETS SERIES :: Exterior through-bolt plate (a)

**Attractive mounting:** External metal through-bolt plate *figure (a)* allows for flush mounting of the cabinet lock face with face of cabinet

**Increases security:** Reinforces the cabinet face by direct connection of lock mounting screws to through-bolt plate's binder posts

**Available finishes:** US3 and 26D


**Includes:** Mounting screws

### ETST SERIES: Spacer/template for through-bolt plate (b)

**Mounting guide:** The spacer/template *figure (b)* allows for proper mounting hole placement of external through-bolt plate

**Spacer:** Can be used as a 1/8" shim spacer






**Available finishes:** US3 and 26D



Through-bolt plates and spacer/templates increase security by providing through-bolt mounting of Olympus cabinet locks. U.S. Patent No. D490,686 S


## ETS Series :: Through-bolt plates for 1-1/8" diameter locks

Item	Finish	Description	Use With
ETS1-125	26D or US3	1/8" thick through-bolt plate	700, 721, 754, 777, 800, 850, 854, 888, 931, 950, L92
ETS1-250	26D or US3	1/4" thick through-bolt plate	
ETS1B	26D or US3	1/4" thick through-bolt plate (no hole)	
ETST1	26D or US3	Through-bolt plate spacer/template	





U.S. Patent No. D490,686 S


Item	Finish	Description	Use With
ETS4	26D or US3	1/2" thick through-bolt plate	777 Series
ETS5	26D or US3	1/2" thick through-bolt plate	888 Series



ETS4



ETS5







## ETS Series :: Through-bolt plates for 7/8" diameter locks



Reinforcing trim spacers and templates increase security by providing through-bolt mounting of Olympus cabinet locks.


U.S. Patent No.  
D490,686 S

Item	Finish	Description	Use With
ETS2-125	26D or US3	1/8" thick through-bolt plate	100, 200, 500, 600
ETS2-250	26D or US3	1/4" thick through-bolt plate	
ETST2	26D or US3	1/8" through-bolt spacer/ template	

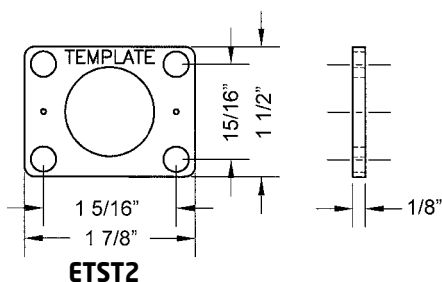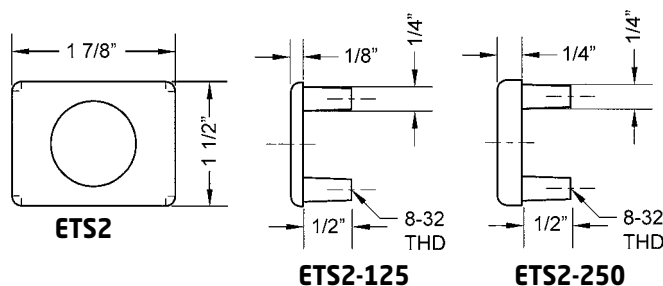


U.S. Patent No.  
D490,686 S

Item	Finish	Description	Use With
ETS3	26D or US3	1/4" thick through-bolt plate	N078, R078
ETST3	26D or US3	1/8" through-bolt spacer/ template	

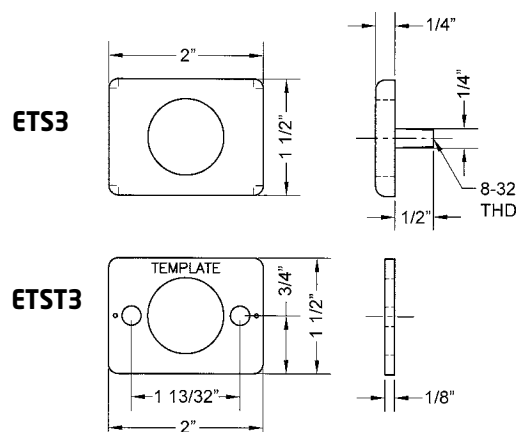

U.S. Patent No.  
D490,686 S


**ETS6**  
Includes  
both pieces

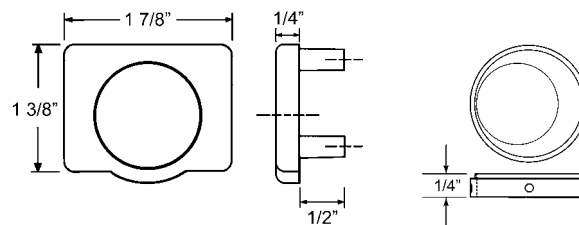

Item	Finish	Description	Use With
ETS6	26D or US3	1/4" thick through-bolt plate	999, 998, 997, 996
ETST6**	26D or US3	1/8" through-bolt spacer/ template	

\*\* Note: ETST6 does not work for inverted function, use WP24 instead.

**ETST6\*\***

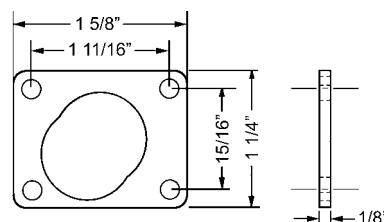

## ETS1-PL :: Cabinet trim pull for 1-1/8" diameter locks

### ETS1-PL :: Cabinet Pulls

**Mounting:** The ETS1-PL cabinet pull fits between our ETS1 through-bolt plate and the face of the cabinet. If mounted "pull down" in drawer applications, the pull will protect the face of the cabinet from the wear and tear of hanging keys.

**Through-bolt security:** When combined with the ETS1 through-bolt plate, they provide through-bolt mounting of the cabinet lock and pull in a single unit.


**Function:** Works for both door or drawer applications

**Compatible with:** Existing ETS1 hardware and screws

**Available finishes:** US3 and US26D

**For use with 1-1/8" diameter locks:** 700, 721, 754, 777, 800, 850, 854, 888, 931, 950, L92

**ETS1-PL**  
External Trim  
Spacer & Pull

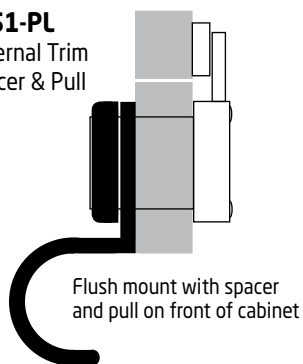


**ETS1-PL**

**ETS1-PL**



**ETS1**

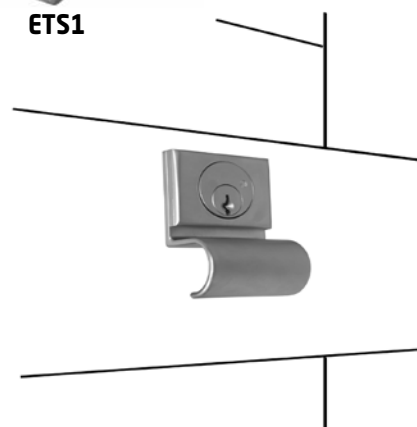

## ETS2-PL :: Cabinet trim pull for 7/8" diameter locks

### ETS2-PL :: Cabinet Pulls


**Mounting:** The ETS2-PL cabinet pull is mounted on the face of the cabinet and provides through-bolt mounting of the cabinet lock and pull in a single unit. If mounted "pull down" in drawer applications, the pull will protect the face of the cabinet from the wear and tear of hanging keys.

**Function:** Works for both door or drawer applications. Does not require use of ETS2 through-bolt plate. Works with existing ETST2 through-bolt spacer/template.

**Available finishes:** US3 and US26D

**For use with 7/8" diameter locks:** 100, 200, 500, 600

**ETST2 - Template**

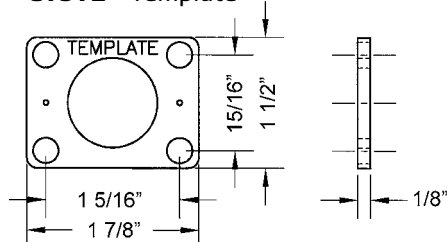

It is recommended that you use the ETST2 spacer/template for proper placement and drilling of mounting holes prior to installation.




**ETS2-PL**


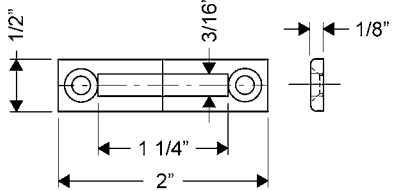

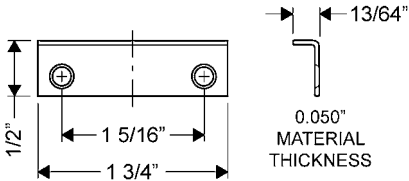

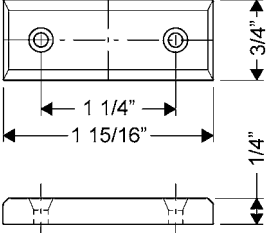

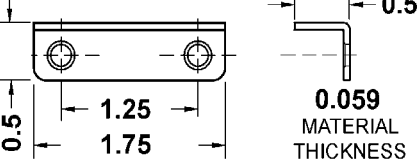

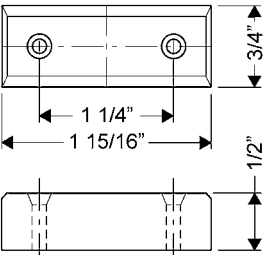

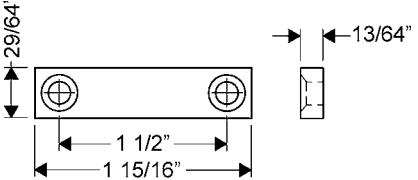

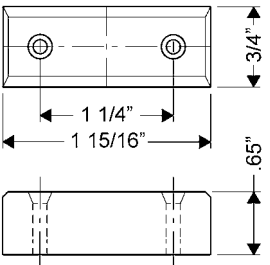

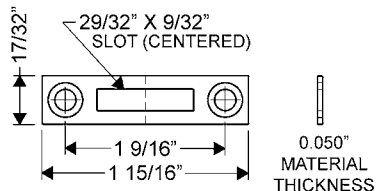

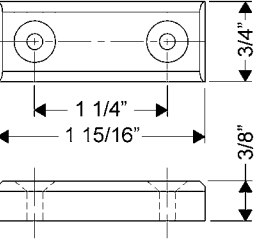

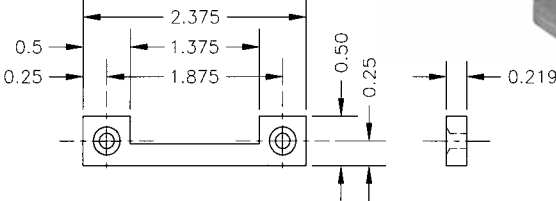
**ETS2-PL**



**ETS2-PL**  
External Trim  
Spacer & Pull

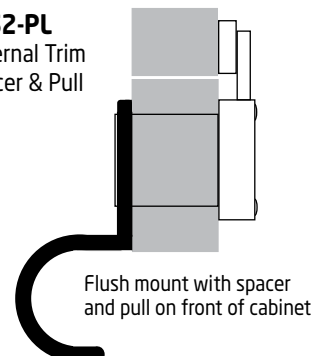


## STRIKES

<p><b>10-052</b>  <b>Type:</b> Slotted strike  <b>Finish:</b> 26D finish</p>  	<p><b>12-1</b>  <b>Type:</b> Angle strike  <b>Finish:</b> 26D or US4</p>  
<p><b>10-054</b>  <b>Type:</b> 1/4" bar strike  <b>Finish:</b> White plastic</p>  	<p><b>12-3</b>  <b>Type:</b> Medium angle strike  <b>Finish:</b> 26D or US4</p>  
<p><b>10-055</b>  <b>Type:</b> 1/2" bar strike  <b>Finish:</b> White plastic</p>  	<p><b>56-1</b>  <b>Type:</b> Bar strike  <b>Finish:</b> 26D or US4</p>  
<p><b>10-057</b>  <b>Type:</b> .65" bar strike  <b>Finish:</b> White plastic</p>  <p>For use with 721DR / 721DW</p> 	<p><b>075</b>  <b>Type:</b> Slotted strike  <b>Finish:</b> 26D or US4</p>  <p>For use with 500, 600, N078, R078 only</p> 
<p><b>10-058</b>  <b>Type:</b> 3/8" bar strike  <b>Finish:</b> White plastic</p>  	<p><b>10-056</b>  <b>Type:</b> Notched bar strike  <b>Finish:</b> 26D</p>  

## STRIKES

### 12-2

**Type:** Heavy duty angle strike  
**Finish:** 26D

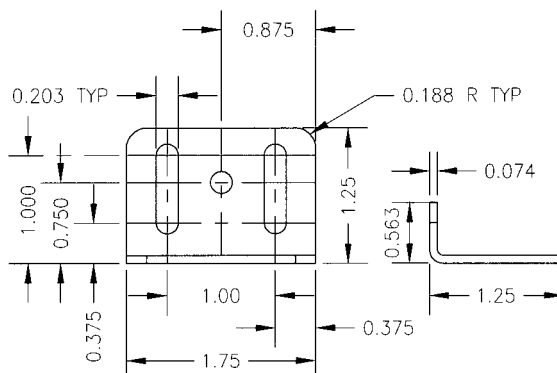


### 12-4-ZP

**Type:** Frameless drawer strike  
**Finish:** Zinc plated




Provides a locking point when there is no frame between drawers. Can be mounted on left or right side of cabinet frame.

MATERIAL THICKNESS .074

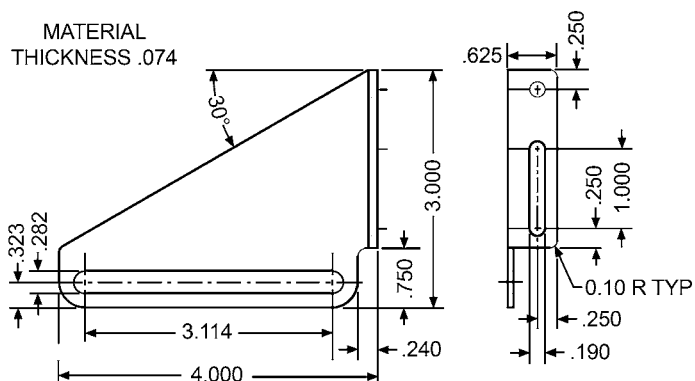


### 725-SP-MD

**Use with:** 725 mortise deadbolt  
**Finish:** US3 or Stainless Steel




### 725-SP-RD

**Use with:** 725/CR1125 rim deadbolt  
**Finish:** US3 or Stainless Steel




### 725-SP-ML

**Use with:** 725 mortise latch  
**Finish:** US3 or Stainless Steel



### 725-SP-RL

**Use with:** 725/CR1125 rim latch  
**Finish:** US3 or Stainless Steel




## STRIKES

### L78ST-1

**Type:** Lipped strike

**Use with:** L78, 1-1/8" barrel length

**Finish:** US3

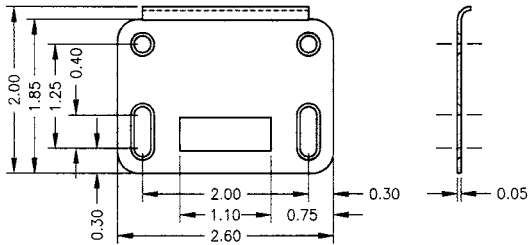


### 999-STRIKE

**Type:** Lipped strike

**Use with:** 996, 997, 998, 999

**Finish:** US3

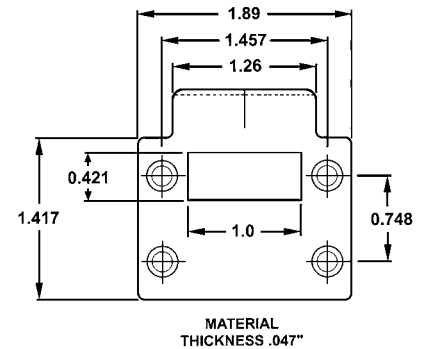


### L78ST-2

**Type:** Lipped strike

**Use with:** L78, 1-3/8" barrel length

**Finish:** US3

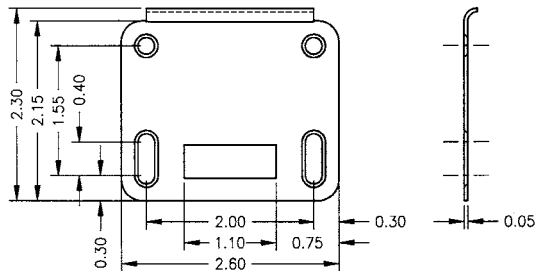


### 850-210

**Type:** Lipped strike

**Use with:** 850/950, 1-1/8" barrel length

**Finish:** US3

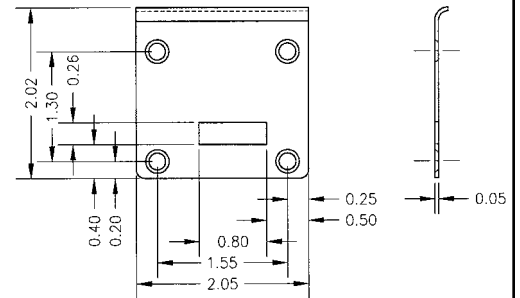


### 850-211

**Type:** Lipped strike

**Use with:** 850, 1-3/8" barrel length

**Finish:** US3

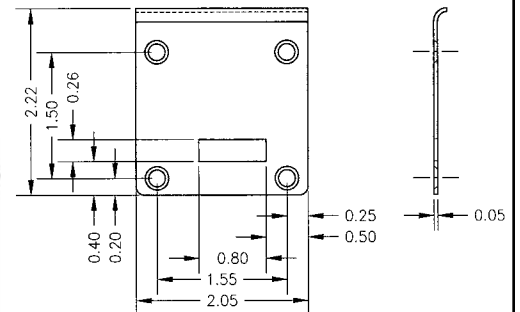

# ACCESSORIES :: For 1-1/8" Dia. Cam Locks

## INSTRUCTIONS :: For 720,820,920,CR25,SA54 Cam Locks

Large (1-1/8" diameter) cam locks ship standard with A, B and C shifters (pictured at right) and 720-3-1 and 720-3-2 cams (pictured on opposite page).



**720-CDLM**  
lost motion cam shifter  
(non-key-retaining)



**720-CDDM**  
key retaining door  
cam shifter




**720-KR**  
key retaining drawer  
cam shifter

### BOX A

#### 720-3-2 VERTICAL CAM / 720-3-4 LONG 3" CAM


IMPORTANT: If your cam has a brass pin between the two notched cut outs, use these instructions, otherwise see Box B.

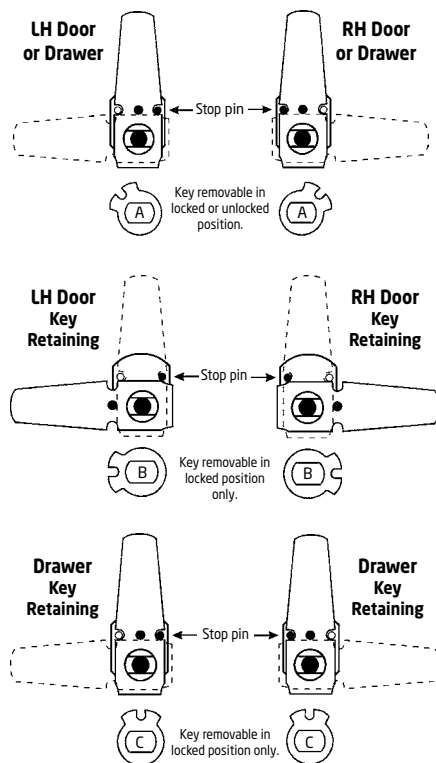


### BOX B

#### 720-3-2 VERTICAL CAM / 720-3-4 LONG 3" CAM


IMPORTANT: If your cam has a brass pin on the bottom of the cam, use these instructions, otherwise see Box A.

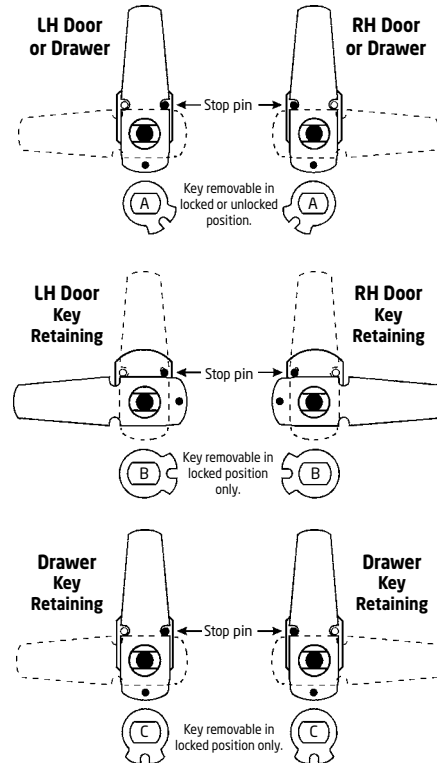

### 720-3-3 INVERTED CAM / 720-3-5 INVERTED CAM

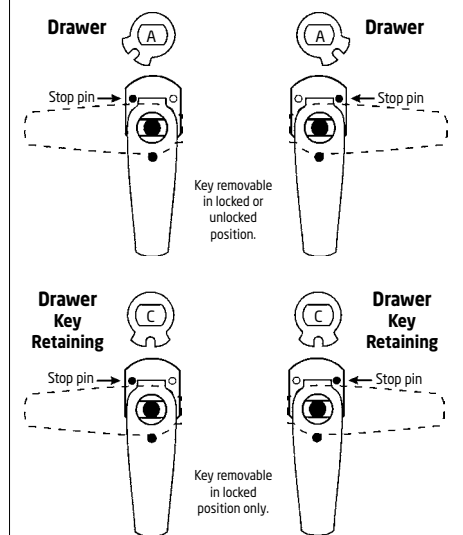

### 720-3-1 SHORT CAM

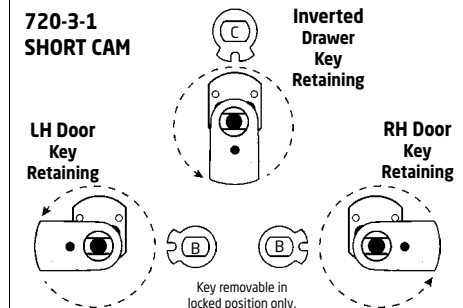

## SW-1 :: Switch Accessory Pack

### GENERAL FEATURES:

**Use:** Includes parts to convert 720, 820, 920, CR25 or SA54 Series cam locks into switch locks

**Configuration:** Can be configured for 1 or 2 switches

**Packaged:** Each

### SWITCHES:


Switches are not included.

**Accepts the following pin plunger style, snap acting, miniature switches:**

- Omron - V Series
- Honeywell (MicroSwitch) - V Series
- Cherry - E Series
- Panasonic (Aromat) - ABV Type
- C&K (ITT) - TM & TF Series



**SW-1**

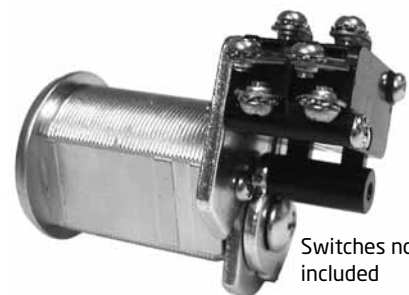


Switches not included



# ACCESSORIES :: For 1-1/8" Dia. Cam Locks

## TR200 :: Trim Rings

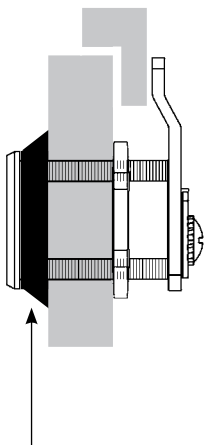

Trim collars pull lock forward allowing it to be used on thinner gauge material thickness.




Part No.	Finish	Description	Use With
TR201	32D or US3	1/8" thick trim collar	720, 820, 920, CR25, SA54
TR202	32D or US3	1/4" thick trim collar	
TR203	32D or US3	3/8" thick trim collar	
TR200A	32D or US3	Trim collar pack. Includes above three trim collars.	

### TRIM COLLARS AVAILABLE SEPARATELY





		
TR201 - 1/8"	TR202 - 1/4"	TR203 - 3/8"

## OPTIONAL CAMS | ANTI ROTATION PLATE

720,820,920,CR25,SA54 SHIPS STANDARD WITH THE FOLLOWING CAMS

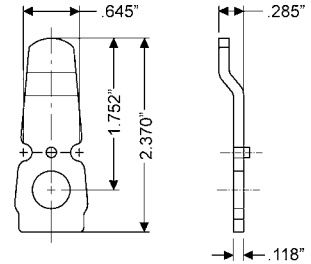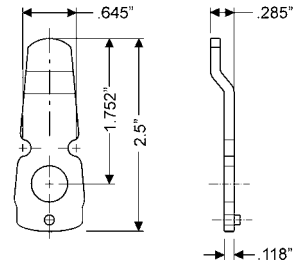
		
<b>720-3-1</b> for inverted function	<b>720-3-2</b> inbent cam for vertical function (mid-pin style)	<b>720-3-2</b> inbent cam for vertical function (new bottom-pin style)

720,820,920,CR25,SA54 OPTIONAL CAMS

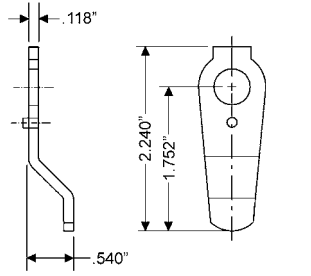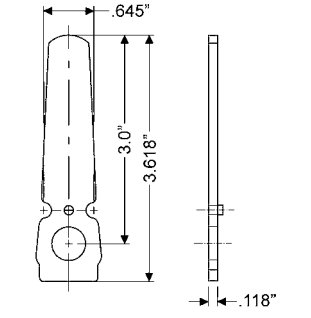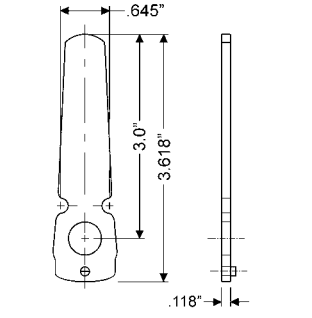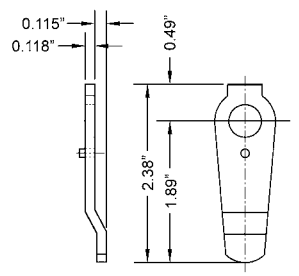			
<b>720-3-3</b> inbent cam for inverted function	<b>720-3-4</b> straight 3" cam for vertical function (mid-pin style)	<b>720-3-4</b> straight 3" cam for vertical function (new bottom-pin style)	<b>720-3-5</b> inbent cam for inverted function

### 720-PL3 - anti-rotation plate

Ships standard with 720,820, 920,CR25 and SA54



The double-D mounting hole prevents the lock from twisting in the hole and provides for placement of a screw to trap fixing nut so that it does not work loose.

# REKEYING INSTRUCTIONS

Rekeying instructions are also available on our website [www.olympus-lock.com](http://www.olympus-lock.com) as videos (in our Video Library) or as written instructions under each individual product page.

## 100,200,500,600,996,997,998,999

1. Remove set screw from barrel of lock.
2. Remove internal cylinder housing from lock body.
3. Remove brass retainer on back of cylinder plug.
4. Turn key 1/4 turn and place follower tool into back of cylinder plug.
5. Push follower through lock, removing plug for rekeying.

## 300SD,400SD

Note: These locks need not be removed from cabinet to be rekeyed.

1. Open lock (cylinder projects forward).
2. Locate "speed release" button on left side of projected cylinder and depress with sharp tool. Cylinder will spring forward.
3. Turn key 1/4 turn and pull cylinder forward out of lock.
4. Pull up retaining pin located at rear of cylinder. Cylinder may be rekeyed in two ways: use a follow tool to remove plug, or access top slide.
5. After keying, hold bolt stable and reinsert cylinder while depressing "speed release." Lock cylinder will automatically realign itself and snap back into place.

## 329R/429R

1. Remove strap from lock.
2. Turn lock over so that the back of the lock faces up and you have access to the set screw.
3. Remove the set screw and the small triangular metal cap.
4. Turn the lock onto its side with the protruding section facing you.
5. Using a sharp tool or paperclip, depress the button at the bottom of the hole. This will release the cylinder housing for removal.
6. Remove the cylinder housing from the lock body.
7. Rekey as necessary.
8. Reassemble lock.

## B7,DCN,DCR,FC10

1. Remove cam and screw.
2. Turn lock upside down.
3. Take a sharp tool and push retainer staple out.
4. Turn key 1/4 turn and place follower tool into back of cylinder plug.
5. Push follower through lock removing plug for rekeying.

## T37

1. To remove bolt:
  - a. Turn key to the 2:00 position, pull bolt up
  - b. Using a small tool, depress the bolt spring through the hole on the back of the lock and pull the bolt out
2. Remove the trim collar from the lock.
3. Slide the pin retaining cap off to expose springs and pins.
4. Rekey as necessary.
5. After keying, slide pin retaining cap back into place.
6. Replace trim collar.
7. To reinsert bolt:
  - a. Insert key and turn to 2:00 position.
  - b. Insert bolt until spring snaps into place.

## N078,R078

1. Remove set screw from barrel of lock.
2. Remove internal cylinder housing from lock body.
3. Remove brass retainer on back of cylinder plug.
4. Turn key 1/4 turn and place follower tool into back of cylinder plug.
5. Push follower through lock, removing plug for rekeying.

## 700,800,L78,754,854

1. Remove set screw from barrel of lock.
2. Turn key 1/4 turn and pull out cylinder and housing from lock body.
3. Extract cylinder and rekey same as a Schlage-style cylinder. Olympus brass cylinder body will chamber Schlage and Weiser original cylinders along with Lori replacement plugs. Less cylinder locks may chamber other manufacturer's cylinders.
4. Replace cylinder in housing. For proper operation, lazy cam must be timed.

*Door timing:* Driver bar faces away from direction the bolt is projecting.

*Drawer timing:* Driver bar faces in same direction the bolt is projecting.
5. Insert cylinder and housing by aligning set screw and hole.
6. Push until cylinder is approximately 1/8" from seated position. Use key to pick up lazy cam which will fully seat cylinder. If key does not withdraw at end of bolt throw, cam is not timed correctly (see "timing" above - Step 4).

## 820

1. Remove both set screw and set screw/stop pin from back of lock.
2. Remove rear housing section from back of lock.
3. Remove internal cam driver from back of cylinder.
4. Remove cylinder from lock body.
5. Remove brass retainer on back of cylinder plug.
6. Turn key 1/4 turn and place follower tool into back of cylinder plug.
7. Push follower through lock, removing plug for rekeying.

## 829

1. Turn lock over and remove the 4 screws from the bottom rectangular plate.
2. Remove bottom plate, then remove remaining set screw from bottom of lock.
3. Remove cylinder and cylinder top block from lock body.
4. Rekey cylinder, then reassemble into lock body using the reverse of above steps.

## 850

1. Remove set screw from barrel of lock.
2. Remove internal cylinder housing from lock body.
3. Turn key 1/4 turn and pull out cylinder and housing from lock body.
4. Extract cylinder and rekey same as a Schlage-style cylinder. Olympus brass cylinder body will chamber Schlage and Weiser original cylinders along with Lori replacement plugs. Less cylinder locks may chamber other manufacturer's Schlage compatible key-in-knob cylinders.
5. Insert cylinder and housing by aligning set screw and hole.

# ARCHITECTURAL SPECIFICATIONS

Architectural specifications (pages 65 - 67) are also available on our website at [www.olympus-lock.com](http://www.olympus-lock.com)

## SMALL PIN :: National Keyway

**4 PIN** - 650 key changes available under a master key system

**5 PIN** - 2,000 key changes available under a master key system

### OLYMPUS DEADBOLT LOCK –

#### **Olympus 100DR (door) - Olympus 200DW (drawer)**

Cabinet locks: Provide Olympus 100DR (door) and Olympus 200DW (drawer) easily rekeyable cabinet locks such as manufactured by Olympus Lock, Inc. All locks to include: working cylinder slides and forwardly removable cylinders for rekeying without totally disassembling lock body. Furnish 2 keys per lock and bar or slotted strikes as required. Spacers to be provided as required for flush fit with outside face of casework material. Locks shall be capable of being keyed alike, keyed different and/or master keyed per supplied schedule. Locks will have passed ANSI Grade 1 cycle testing.

### OLYMPUS LATCH LOCK –

#### **Olympus 999R (RH-door) / 999L (LH-door) - Olympus 998 (drawer)**

Cabinet locks: Provide Olympus 999 (door) and 998 (drawer) easily rekeyable latch locks such as manufactured by Olympus Lock, Inc. All locks to include: working cylinder slides, forwardly removable cylinders for rekeying without totally disassembling lock body and four-way reversible handing. Keyway will remain in the vertical position regardless of installation as a door or drawer. Spacers will be provided as required for flush fit with outside face of casework material. Furnish 2 keys per lock and lipped strike as required. Locks shall be capable of being keyed alike, keyed different and/or master keyed per supplied schedule.

### OLYMPUS SLIDING DOOR LOCK –

#### **Olympus 300SD (sliding door)**

Cabinet locks: Provide Olympus 300SD (sliding door) lock. Locks shall be easily rekeyable without removal from cabinet via a speed release mechanism such as manufactured by Olympus Lock, Inc. All locks to include: working cylinder slides, forwardly removable cylinders for rekeying without totally disassembling lock body, built in bolt extension and strike locator. Locks will include 2 keys per lock and shall be capable of being keyed alike, keyed different and/or master keyed per supplied schedule.

### OLYMPUS CAM LOCKS –

#### **Olympus DCN1, DCN2, DCN3, DCN4**

Cabinet locks: Provide Olympus DCN Series (cam lock). Cam locks to be easily rekeyable and field reversible such as manufactured by Olympus Lock, Inc. All cylinders to include a working top slide mechanism and retainer staple to permit easy rekeying and field maintenance of lock. Cam locks will have a 1 inch face diameter and include an anti-rotation plate to trap the hex nut and prevent the lock from twisting in the hole. All cam locks will be field reversible such that one straight and one offset cam will provide all locking positions. Locks will include 2 keys per lock and shall be capable of being keyed alike, keyed different and/or master keyed per supplied schedule.

### OLYMPUS DEADBOLT LOCK –

#### **Olympus N078R (RH-door) / N078L (LH-door) - and N078 (drawer)**

Cabinet locks: Provide Olympus N078 (door) and N078 (drawer) easily rekeyable cabinet locks such as manufactured by Olympus Lock, Inc. All locks to include: working cylinder slides and forwardly removable cylinders for rekeying without totally disassembling lock body. Provide spacers as required for flush fit with outside face of casework material. Keyway will remain in the vertical position regardless of installation as a door or drawer. Locks will include 2 keys per lock and shall be capable of being keyed alike, keyed different and/or master keyed per supplied schedule.

### OLYMPUS SHOWCASE RATCHET LOCK –

#### **Olympus 329R**

Ratchet locks: Provide Olympus 329R easily rekeyable ratchet lock such as manufactured by Olympus Lock, Inc. All locks to include: working cylinder slides and forwardly removable cylinders for rekeying without totally disassembling lock body. Locks will include 2 keys per lock and shall be capable of being keyed alike, keyed different and/or master keyed per supplied schedule.

## SMALL PIN :: CCL Keyway

**5 PIN** - 2,000 key changes available master key system

**6 PIN** - 4,000 key changes available master key system

### OLYMPUS DEADBOLT LOCK –

#### **Olympus 500DR (door) - Olympus 600DW (drawer)**

Cabinet locks: Provide Olympus 500DR (door) and Olympus 600DW (drawer) easily rekeyable cabinet locks such as manufactured by Olympus Lock, Inc. All locks to include: working cylinder slides and forwardly removable cylinders for rekeying without totally disassembling lock body. Furnish 2 keys per lock and bar or slotted strikes as required. Spacers to be provided as required for flush fit with outside face of casework material. Locks shall be capable of being keyed alike, keyed different and/or master keyed per supplied schedule and will include .095 diameter pins. Locks will have passed ANSI Grade 1 cycle testing.

### OLYMPUS LATCH LOCK –

#### **Olympus 997R (RH-door) / 997L (LH-door) - Olympus 996 (drawer)**

Cabinet locks: Provide Olympus 997 (door) and 996 (drawer) easily rekeyable latch locks such as manufactured by Olympus Lock, Inc. All locks to include: working cylinder slides, forwardly removable cylinders for rekeying without totally disassembling lock body and four-way reversible handing. Keyway will remain in the vertical position regardless of installation as a door or drawer. Spacers will be provided as required for flush fit with outside face of casework material. Furnish 2 keys per lock and lipped strike as required. Locks shall be capable of being keyed alike, keyed different and/or master keyed per supplied schedule and will include .095 diameter pins.

### OLYMPUS SLIDING DOOR LOCK –

#### **Olympus 400SD (sliding door)**

Cabinet locks: Provide Olympus 400SD (sliding door) lock. Locks shall be easily rekeyable without removal from cabinet via a speed release mechanism such as manufactured by Olympus Lock, Inc. All locks to include: working cylinder slides, forwardly removable cylinders for rekeying without totally disassembling lock body, built in bolt extension and strike locator. Locks will include 2 keys per lock and shall be capable of being keyed alike, keyed different and/or master keyed per supplied schedule and will include .095 diameter pins.

### OLYMPUS CAM LOCK –

#### **Olympus DCR1, DCR2, DCR3, DCR4**

Cabinet locks: Provide Olympus DCR Series (cam lock). Cam locks to be easily rekeyable and field reversible such as manufactured by Olympus Lock, Inc. All cylinders to include a working top slide mechanism and retainer staple to permit easy rekeying and field maintenance of lock. Cam locks will have a 1 inch face diameter and include an anti-rotation plate to trap the hex nut and prevent the lock from twisting in the hole. All cam locks will be field reversible such that one straight and one offset cam will provide all locking positions. Locks will include 2 keys per lock and shall be capable of being keyed alike, keyed different and/or master keyed per supplied schedule and will include .095 diameter pins.

# ARCHITECTURAL SPECIFICATIONS

## **OLYMPUS DEADBOLT LOCK – Olympus R078 (drawer)**

Cabinet locks: Provide R078 (drawer) easily rekeyable cabinet locks such as manufactured by Olympus Lock, Inc. All locks to include: working cylinder slides and forwardly removable cylinders for rekeying without totally disassembling lock body. Provide spacers as required for flush fit with outside face of casework material. Locks will include 2 keys per lock and shall be capable of being keyed alike, keyed different and/or master keyed per supplied schedule and will include .095 diameter pins.

## **OLYMPUS SHOWCASE RATCHET LOCK – Olympus 429R**

Ratchet locks: Provide Olympus 429R easily rekeyable ratchet lock such as manufactured by Olympus Lock, Inc. All locks to include: working cylinder slides and forwardly removable cylinders for rekeying without totally disassembling lock body. Locks will include 2 keys per lock and shall be capable of being keyed alike, keyed different and/or master keyed per supplied schedule.

## **IC CORE :: Schlage Full-Size**

### **LOCK BODIES FOR SCHLAGE FULL-SIZE/LARGE FORMAT IC CORE**

**5 PIN** - 2,000 key changes available master key system

**6 PIN** - 4,000 key changes available master key system

### **OLYMPUS DEADBOLT LOCK –**

#### **Olympus 777ICP-DR (door) - Olympus 888ICP-DW (drawer)**

Cabinet locks: Provide 777ICP-DR (door) and 888ICP-DW (drawer) locks as manufactured by Olympus Lock, Inc. All lock bodies to accept Schlage large format interchangeable core cylinders such as supplied by Schlage Lock Company. Locks will provide dedicated door and drawer functions in order to maintain keyway verticality when installed. Deadbolt door locks to be non-handed. Locks will have passed ANSI Grade 1 cycle testing.

### **OLYMPUS CAM LOCK –**

#### **Olympus 920LM/DM**

Cabinet locks: Provide 920LM/DM (cam lock) such as manufactured by Olympus Lock, Inc. Cam locks will be reversible between lost motion or key retaining. All locks to accept Schlage large format interchangeable core cylinders such as supplied by Schlage Lock Company. All locks will provide disassembly/reassembly features to facilitate on-the-job maintenance.

### **OLYMPUS SHOWCASE RATCHET LOCK –**

#### **Olympus 929R**

Cabinet locks: Provide Olympus 929R sliding door ratchet lock such as manufactured by Olympus Lock, Inc. All locks to accept Schlage large format interchangeable core cylinders such as supplied by Schlage Lock Company.

### **OLYMPUS LATCH LOCK –**

#### **Olympus L92 Series**

Cabinet locks: Provide Olympus L92V latch lock such as manufactured by Olympus Lock, Inc. All locks to accept Schlage large format interchangeable core cylinders such as supplied by Schlage Lock Company.

## **IC CORE :: Sargent**

**6 PIN** - 4,000 key changes available with master key system

### **OLYMPUS CAM LOCK –**

#### **Olympus SA54 Series (cam lock)**

Cabinet locks: Provide Olympus SA54 Series (cam lock) such as manufactured by Olympus Lock, Inc. Lock to accept 6 pin Sargent interchangeable core cylinders such as manufactured by Sargent Manufacturing Company. Cam locks to be reversible between lost motion and key retaining and include disassembly/reassembly features to facilitate on-the-job maintenance.

## **STD CYLINDER :: Schlage C Keyway**

**5 PIN** - 2,000 key changes available under a master key system

**6 PIN** - 4,000 key changes available under a master key system

### **OLYMPUS DEADBOLT LOCK –**

#### **Olympus 700SC (door) - Olympus 800SC (drawer)**

Cabinet locks: Provide Olympus 700SC (door) and Olympus 800SC (drawer) easily rekeyable cabinet locks such as manufactured by Olympus Lock, Inc. All locks to include: forwardly removable cylinders for rekeying without totally disassembling lock body. Furnish 2 keys per lock and bar or slotted strikes as required. Spacers to be provided as required for flush fit with outside face of casework material. Locks shall be capable of being keyed alike, keyed different and/or master keyed per supplied schedule. Locks will have passed ANSI Grade 1 cycle testing.

### **OLYMPUS CAM LOCK –**

#### **Olympus 820SC**

Cabinet locks: Provide Olympus 820SC (cam) locks. Locks shall be easily rekeyable such as manufactured by Olympus Lock, Inc. All locks will include easily removable cylinders for rekeying without totally disassembling lock body. Locks shall be capable of being keyed alike, keyed different and/or master keyed per supplied schedule. Furnish 2 keys per lock.

### **OLYMPUS SHOWCASE RATCHET LOCK –**

#### **Olympus 829R**

Cabinet locks: Provide Olympus 829R sliding door ratchet lock such as manufactured by Olympus Lock, Inc. All locks will include easily removable cylinders for rekeying. Locks shall be capable of being keyed alike, keyed different and/or master keyed per supplied schedule. Furnish 2 keys per lock.

### **OLYMPUS LATCH LOCK (DEAD LATCH) –**

#### **Olympus 850SC (drawer)**

Cabinet locks: Provide Olympus 850SC (drawer) locks. Locks shall be easily rekeyable such as manufactured by Olympus Lock, Inc. All drawer latch locks to provide a deadlocking function, forwardly removable cylinders for rekeying without totally disassembling lock body, and spacers as required for flush fit with outside face of casework material. Furnish 2 keys per lock and strikes as required. Locks shall be capable of being keyed alike, keyed different and/or master keyed per supplied schedule.

### **OLYMPUS LATCH LOCK (SPRING LATCH) –**

#### **Olympus L78R / L78L (door) - L78V (drawer)**

Cabinet locks: Provide Olympus L78 (door) and Olympus L78 (drawer) latch locks. Locks shall be easily rekeyable such as manufactured by Olympus Lock, Inc. All latch locks to provide: forwardly removable cylinders for rekeying without totally disassembling lock body. Locks shall provide for field reversible handings such that keyway will remain in the vertical position regardless of installation as a door or a drawer. Spacers to be provided for flush fit with outside face of casework material. Furnish 2 keys per lock and strikes as required. Locks shall be capable of being keyed alike, keyed different and/or master keyed per supplied schedule.

## **LESS CYLINDER :: Sargent**

**6 PIN** - 4,000 key changes available with master key system

### **OLYMPUS DEADBOLT LOCKS –**

#### **Olympus 754LC (door) - Olympus 854LC (drawer)**

Cabinet lock: Provide Olympus 754LC (door) and Olympus 854LC (drawer) easily rekeyable locks such as manufactured by Olympus Lock, Inc. All locks to include: forwardly removable cylinders for rekeying without totally disassembling lock body, and spacers as required for flush fit with outside face of casework material. All deadbolt locks to be non-handed and to provide dedicated door and drawer functions in order to maintain keyway verticality when installed. All lock bodies to accept Sargent C480-2 (13-3457) deadbolt cylinder as supplied by Sargent Manufacturing Company.



# ARCHITECTURAL SPECIFICATIONS

## IC CORE :: Small Format

**6 PIN** - 4,000 key changes available with master key system

**7 PIN** - 16,000 key changes available with master key system

### **OLYMPUS CAM LOCK –**

#### ***Olympus 720 Series***

Cabinet locks: Provide Olympus 720 Series (cam lock) such as manufactured by Olympus Lock, Inc. Lock to accept 6 or 7 pin small format interchangeable core cylinders such as supplied by Best, Arrow, Falcon, KSP or equivalent. Cam locks to be reversible between lost motion and key retaining and include disassembly/reassembly features to facilitate on-the-job maintenance.

### **OLYMPUS DEADBOLT LOCK –**

#### ***Olympus 721DR (door) - Olympus 721DW (drawer)***

Cabinet locks: Provide Olympus 721DR (door) and Olympus 721DW (drawer) such as manufactured by Olympus Lock, Inc. Locks to accept 6 or 7 pin small format interchangeable core cylinders such as supplied by Best, Arrow, Falcon, KSP or equivalent. All locks to be field reversible and to provide dedicated door and drawer functions in order to maintain keyway verticality when installed. Include strikes as required for flush fit with outside face of casework material. Locks will provide disassembly/reassembly features to facilitate on-the-job maintenance. Locks will have passed ANSI Grade 1 cycle testing.

### **OLYMPUS SLIDING DOOR LOCK –**

#### ***Olympus 722S (standard mount) - 722S-TBM (through-bolt mount)***

Cabinet locks: Provide Olympus 722 Series sliding door lock such as manufactured by Olympus Lock, Inc. Lock to accept 6 or 7 pin small format interchangeable core cylinders such as supplied by Best, Arrow, Falcon, KSP or equivalent.

### **OLYMPUS DEADBOLT LOCK –**

#### ***Olympus 725RD Series - Olympus 725MD Series***

Cabinet locks: Provide Olympus 725 Series deadbolt door and drawer locks such as manufactured by Olympus Lock, Inc. Locks to accept 6 or 7 pin small format interchangeable core cylinders such as supplied by Best, Arrow, Falcon, KSP or equivalent. Locks will provide dedicated door and drawer functions in order to maintain keyway verticality when installed. Include strikes as required. Locks will have passed ANSI Grade 1 cycle testing.

### **OLYMPUS LATCH LOCK –**

#### ***Olympus 725RL Series - Olympus 725ML Series***

Cabinet locks: Provide Olympus 725 Series door and drawer latch locks such as manufactured by Olympus Lock, Inc. Locks to accept 6 or 7 pin small format interchangeable core cylinders such as supplied by Best, Arrow, Falcon, KSP or equivalent. Locks will provide dedicated door and drawer functions in order to maintain keyway verticality when installed. Include strikes as required. Locks will have passed ANSI Grade 1 cycle testing.

### **OLYMPUS MAILBOX LOCK –**

#### ***Olympus 728MBL***

Cabinet locks: Provide Olympus 728MBL mailbox locks such as manufactured by Olympus Lock, Inc. Locks to accept 6 or 7 pin small format interchangeable core cylinders such as supplied by Best, Arrow, Falcon, KSP or equivalent.

### **OLYMPUS SHOWCASE RATCHET LOCK –**

#### ***Olympus 729R***

Cabinet locks: Provide Olympus 729R sliding door ratchet lock such as manufactured by Olympus Lock, Inc. Locks to accept 6 or 7 pin small format interchangeable core cylinders such as supplied by Best, Arrow, Falcon, KSP or equivalent.

### **OLYMPUS LATCH LOCK (DEAD LATCH) –**

#### ***Olympus 950IC (drawer)***

Cabinet locks: Provide Olympus 950IC (drawer) locks. All drawer latch locks to provide a deadlocking function, strikes and spacers as required for flush fit with outside face of casework material. Locks to accept 6 or 7 pin small format interchangeable core cylinders such as supplied by Best, Arrow, Falcon, KSP or equivalent.

## BEST KEYWAY :: Utility Cam Lock

**6 PIN** - 4,000 key changes available with master key system

**7 PIN** - 16,000 key changes available with master key system

### **OLYMPUS CAM LOCK –**

#### ***Olympus B7 Series***

Cabinet locks: Provide Olympus B7 Series (cam lock) such as manufactured by Olympus Lock, Inc. Cam locks to be reversible between lost motion and key retaining and include disassembly/reassembly features to facilitate on-the-job maintenance.

## IC CORE :: Corbin/Russwin

**6 PIN** - 4,000 key changes available with master key system

**7 PIN** - 16,000 key changes available with master key system

### **OLYMPUS DEADBOLT LOCKS –**

#### ***Olympus CR1125RD (door/drawer)***

Cabinet locks: Provide Olympus CR1125RD (door/drawer) lock bodies as manufactured by Olympus Lock, Inc. Locks to accept 6 or 7 pin interchangeable core cylinders as supplied by Corbin/Russwin. All deadbolt locks to provide dedicated door and drawer functions in order to maintain keyway verticality when installed. All locks to be manufactured with disassembly/reassembly features to facilitate on-the-job maintenance.

### **OLYMPUS LATCH LOCKS –**

#### ***Olympus CR1125RL (drawer)***

Cabinet locks: Provide Olympus CR1125RL (drawer) lock bodies as manufactured by Olympus Lock, Inc. Locks to accept 6 or 7 pin interchangeable core cylinders as supplied by Corbin/Russwin. All latch locks to provide dedicated drawer function in order to maintain keyway verticality when installed. All locks to be manufactured with disassembly/reassembly features to facilitate on-the-job maintenance.

### **OLYMPUS CAM LOCK –**

#### ***Olympus CR25 Series (cam lock)***

Cabinet locks: Provide Olympus CR25 Series (cam lock) such as manufactured by Olympus Lock, Inc. Lock to accept 6 or 7 pin Corbin/Russwin interchangeable core cylinders such as manufactured by Corbin/Russwin. Cam locks to be reversible between lost motion and key retaining and include disassembly/reassembly features to facilitate on-the-job maintenance.

## IC CORE :: Medeco/Yale

**6 PIN** - 4,000 key changes available with master key system


### **OLYMPUS DEADBOLT LOCK –**

#### ***Olympus 931DR (door) - Olympus 931DW (drawer)***

Cabinet lock: Provide Olympus 931DR (door) and Olympus 931DW (drawer) locks such as manufactured by Olympus Lock, Inc. All locks to accept Medeco 6-pin interchangeable core cylinder #32-0201 or Yale #1210 series 6-pin interchangeable core cylinder. Locks will include spacers as required for flush fit with outside face of casework material. Include bar or slotted strikes as required. All deadbolt locks to be non-handed and to provide dedicated door and drawer functions in order to maintain keyway verticality when installed. All locks will be manufactured with disassembly/reassembly features to facilitate on-the-job maintenance.

# BRASS PADLOCKS

## Dimensions & Weight Olympus & Mountain Series

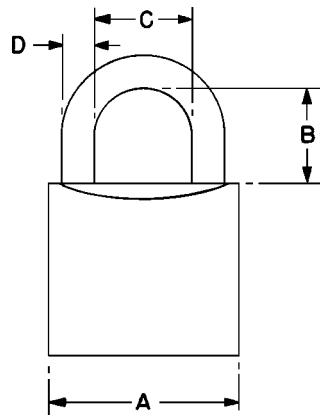

- A** = Body size
- B** = Distance between top of lock and inside shackle
- C** = Width of inside shackle
- D** = Shackle diameter

### MOUNTAIN SERIES

Item	A	Keying	B	C	D	Box Qty	Box Weight
BP075	3/4"	KD or KA 30	1/2"	1/2"	5/32"	10	1.1 lbs.
BP100	1"	KD or KA 40, 45	1/2"	1/2"	5/32"	10	1.1 lbs.
BP125	1-1/4"	KD or KA 51	5/8"	5/8"	7/32"	10	2.1 lbs.
BP125-LS	1-1/4"	KD or KA 51, 59	2-1/8"	5/8"	7/32"	10	3.1 lbs.
BP150	1-1/2"	KD or KA 60, 61, 65	7/8"	3/4"	1/4"	10	3.9 lbs.
BP150-LS	1-1/2"	KD or KA 60, 65	2-1/2"	3/4"	1/4"	10	4.7 lbs.
BP175	1-3/4"	KD or KA 70, 75	1"	1"	9/32"	5	2.9 lbs.
BP200	2"	KD or KA 80	1-1/8"	1"	11/32"	5	3.1 lbs.

*Note: All fractional measurements are approximate.*

### OLYMPUS SERIES

Item	A	Keying	B	C	D	Box Qty	Box Weight
B075	3/4"	KD or KA 5, 25	3/8"	3/8"	1/8"	12	1.0 lbs.
B100	1"	KD or KA 10	1/2"	1/2"	5/32"	6	1.0 lbs.
B125	1-1/4"	KD or KA 1, 3	5/8"	5/8"	7/32"	6	1.5 lbs.
B125-LS	1-1/4"	KD or KA 1	2-1/2"	5/8"	7/32"	6	1.7 lbs.
B150	1-1/2"	KD or KA 2, 4, 9, 11, 12	3/4"	3/4"	1/4"	6	2.2 lbs.
B150-LS	1-1/2"	KD or KA 2, 4	2-3/4"	3/4"	1/4"	6	2.7 lbs.
B200	2"	KD or KA 14, 15	1"	1"	11/32"	6	4.2 lbs.
B250	2-1/2"	KD or KA 6, 7, 8	1-1/4"	1-1/4"	7/16"	6	7.5 lbs.

*Note: All fractional measurements are approximate.*



# BRASS PADLOCKS

## MOUNTAIN :: Blister Packed Padlocks


### GENERAL FEATURES:

- > Pin tumbler
- > Solid brass body
- > Hardened steel shackle
- > Brass internal parts
- > Heel & toe locking
- > Keyed different or keyed alike
- > All weather, indoor/outdoor
- > Includes 3 keys per lock

Item	Width	Keying	Shackle	Box Qty.*	Case Qty.
BP075	3/4" – 20mm	KD, KA 30	Regular	10	200
BP100	1" – 25mm	KD, KA 40,45	Regular	10	200
BP125	1-1/4" – 30mm	KD, KA 51	Regular	10	100
BP125LS	1-1/4" – 30mm	KD, KA 51,59	Long	10	50
BP150	1-1/2" – 40mm	KD, KA 60,61,65	Regular	10	100
BP150LS	1-1/2" – 40mm	KD, KA 60,65	Long	10	50
BP175	1-3/4" – 45mm	KD, KA 70,75	Regular	5	75
BP200	2" – 50mm	KD, KA 80	Regular	5	75


\* Sold in full box quantities only

**BP075**  
3/4" Padlock Keyblanks




**KB220**  
KA & KD  
Padlocks

**BP100**  
1" Padlock Keyblanks




**KB225**  
KA & KD  
Padlocks

**BP125**  
1-1/4" Padlock Keyblanks




**KB235**  
KA & KD  
Padlocks

**BP150 & BP175**  
1-1/2" & 1-3/4" Padlock Keyblanks



**KB240**  
KA & KD  
Padlocks

**BP200**  
2" Padlock Keyblanks



**KB250**  
KA & KD  
Padlocks



Long  
Shackle



Regular  
Shackle

### MOUNTAIN PADLOCK KEYBLANKS

Item	Fits Padlock	Packaged
KB220	BP075	50/box
KB225	BP100	50/box
KB235	BP125	50/box
KB240	BP150/BP175	50/box
KB250	BP200	50/box

# BRASS PADLOCKS

## OLYMPUS :: Box Packed Padlocks

### GENERAL FEATURES:

- > Pin tumbler
- > Solid brass body
- > Chrome plated, hardened steel shackle
- > Brass internal parts
- > Heel & toe locking
- > Keyed different or keyed alike
- > All weather, indoor/outdoor
- > Includes 3 keys per lock

Item	Width	Keying	Shackle	Box Qty. *	Case Qty.
B075	3/4" – 20mm	KD, KA 5	Regular	12	600
B100	1" – 25mm	KD, KA 10	Regular	6	360
B125	1-1/4" – 30mm	KD, KA 1, 3	Regular	6	240
B125LS	1-1/4" – 30mm	KD, KA 1	Long	6	120
B150	1-1/2" – 40mm	KD, KA 2, 4, 9, 11, 12	Regular	6	120
B150LS	1-1/2" – 40mm	KD, KA 2, 4	Long	6	120
B200	2" – 50mm	KD, KA 14, 15	Regular	6	60
B250	2-1/2" – 63mm	KD, KA 6, 7, 8	Regular	6	48

\* Sold in full box quantities only



Long Shackle




Regular Shackle

### Fits B075



**Fits:**  
B075A-16  
KD - May take either blank

#361A



**Fits:**  
B075A-5  
KD - May take either blank

#361B

### Fits B100



**Fits:**  
B100A-10  
KD - May take either blank


#362A



**Fits:**  
B100A-10  
KD - May take either blank

#362B

### Fits B125



**Fits:**  
B125A-1  
KD - May take either blank

#363A



**Fits:**  
B125A-3  
KD - May take either blank

#363B

### Fits B150, B175, B200



**Fits:**  
B150A-4  
B150A-12  
B175A-14  
B200A-14  
KD - May take either blank

#364A



**Fits:**  
B150A-2  
B150A-9  
B150A-11  
B175A-15  
B200A-15  
KD - May take either blank

#364B

### Fits B200, B250



**Fits:**  
B200A-6  
B200A-8  
B250A-6  
B250A-8  
KD - May take either blank


#365A



**Fits:**  
B200A-7  
B250A-7  
KD - May take either blank

#365B

### Fits B200



**Fits:**  
B250A-18  
B250A-20  
B250A-22  
KD - May take either blank

#366A



**Fits:**  
B250A-19  
B250A-21  
KD - May take either blank

#366B

### OLYMPUS PADLOCK KEYBLANKS

Item	Fits Padlock	Packaged
361A/361B	B075	100/bag
362A/362B	B100	100/bag
363A/363B	B125	100/bag
364A/364B	B150	100/bag
365A/365B	B200	100/bag
366A/366B	B250	100/bag

# BRASS PADLOCKS

## RB175 :: Schlage (composite) or Weiser Keyway

### GENERAL FEATURES:


- > Double locking (heel & toe)
- > Body width: 1-3/4" (45mm)
- > Hardened Steel Shackle Retaining Pin
- > 6 pin capability
- > Schlage composite keyway fits Schlage C through K keyways
- > "O" bitted standard
- > Custom keying available at time of order
- > Includes 2 key blanks per lock
- > Packed 6 per box, 60 per case
- > Extruded Brass

### REGULAR SHACKLE:

- > Shackle opening: 1"
- > Packed 6 per box
- > Box weight 4.68 lbs.

### LONG SHACKLE:

- > Shackle opening: 2-1/4"
- > Packed 6 per box
- > Box weight 5.22 lbs.

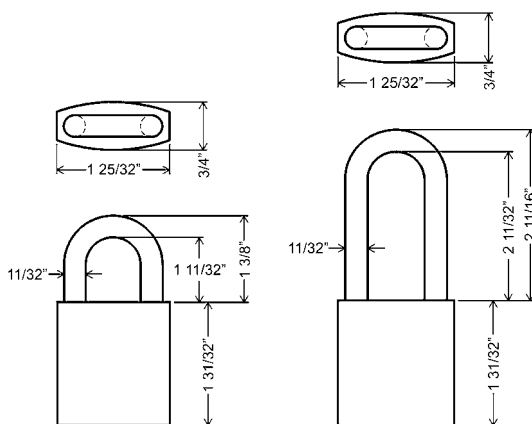

Item	Shackle	Keyway
RB175SC-COMP	Regular	Schlage Composite Keyway
RB175SC-COMP-LS	Long	Schlage Composite Keyway
RB175WSR-D-NL	Regular	Weiser keyway
RB175WSR-D-NLLS	Long	Weiser keyway


## CRB200 :: For Corbin/Russwin IC Cores

### GENERAL FEATURES:


- > Extruded brass
- > Body size 2" tall by 2" wide (50mm)
- > Stainless steel shackle
- > Available standard or long shackle
- > Ball bearing locking heel and toe
- > Chambers Corbin/Russwin 6-pin IC cylinders (cores not included)
- > Key removable in locked or unlocked position
- > BHMA 606 Satin Brass (US4)
- > Core not included
- > Packed each
- > Weight 0.82 lbs. each

### SHACKLE OPENING:

- > Regular shackle opening: 7/8" (25mm)
- > Long shackle opening: 2-5/8" (65mm)

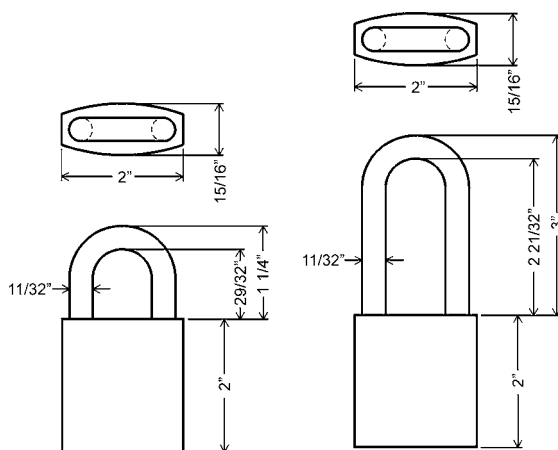

Item	Shackle	Keyway
CRB200-IC6	Regular	Accepts Corbin/Russwin IC Cylinders
CRB200-IC6-LS	Long	Accepts Corbin/Russwin IC Cylinders

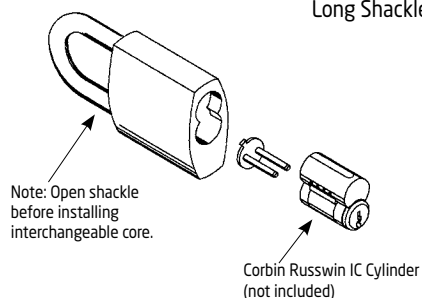



## THE CABINET LOCK INNOVATORS

*We make the changes that change the industry.*

Olympus Lock, Inc. is a leading manufacturer of easily rekeyable, pin tumbler cabinet locks and interchangeable core cabinet lock bodies for a wide range of commercial and institutional applications. Our mission is to create pin tumbler cabinet locks and accessories of unparalleled innovation, quality, keyway compatibility, and value in a manner which sets a new industry standard for excellence.

For more information, installation instructions or pre-written architectural specifications, please visit our website at:

**[www.olympus-lock.com](http://www.olympus-lock.com)**



*The cabinet lock innovators.*

18424 Highway 99  
Lynnwood, WA 98037  
206-362-3290 • 800-525-0954  
Fax 206-362-3569

[www.olympus-lock.com](http://www.olympus-lock.com)  
[info@olympus-lock.com](mailto:info@olympus-lock.com)

Copyright © 2012 Olympus Lock, Inc. all rights reserved. Other products and companies referred to herein are trademarks or registered trademarks of their respective companies or mark holders. Information and specifications in this document are subject to change without notice at any time. The information provided in this document is as complete and correct as is reasonably possible. We cannot guarantee the accuracy of information provided to us by other manufacturers as they are under no obligation to notify us of changes to products or specifications. Printed in USA. 06/12